



Not registered

General Data

Type Number: 103G820-8
Brand: Step-Syn (Sanyo-Denki Japan)
OEM #: 4432280 (IBM)
Frame: NEMA 34 _____
Steps: 180 / rev (2 degrees per step or finer with micro-stepping)
Current: 1.3 Amp
Volts: 7.4 Vdc
Torque: _____ Nm @ _____ A (_____ oz.in.)
Resistance: 5.4 Ohms / phase (nominal)
Inductance: 28 mH / phase (nominal)
Connector: 9 wire x 0.3" (see diag.)
Wires: 6 wire (up to 250 mm nominal)

Shaft: 6.0 mm dia x 37 mm long
Shaft-Detail: Plain (flatted 5.62)
Size: 86 x 86 x 64 mm (nominal)
Weight: 1.4 kg

Supply-Max: 24~80 Vdc (recommended max = V x 25)

Condition: Used (refurbished)

Comments: long slender shaft & 2deg step angle may limit the applications for these motors. Optional ribbon winding hub may be available.


Stepping Motor

Type: 103G820-8



<http://www.casa.co.nz>

Edition: 23/08/2011

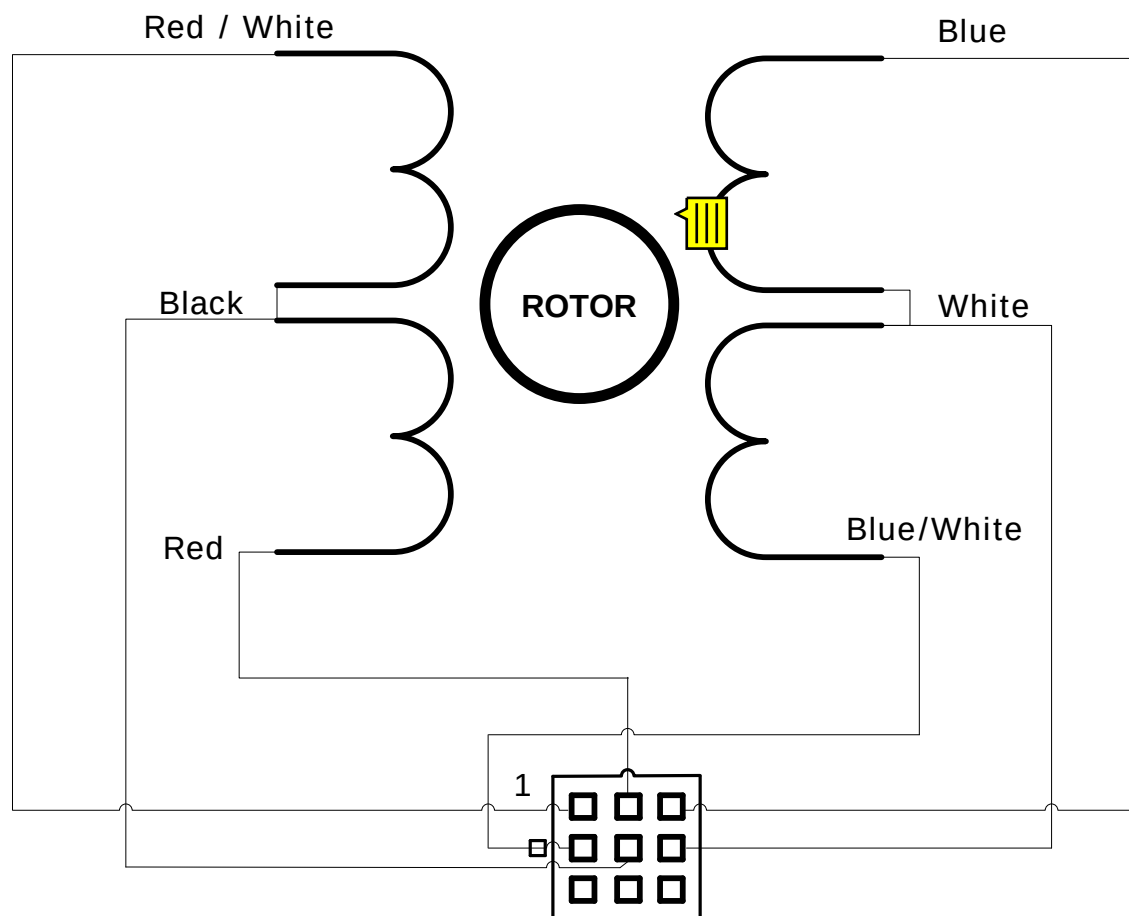

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.