

Stepping Motor

Type: **23LM-C303-09**



Not registered

General Data

Type #: 23LM-C303-09
Brand: AstroSyn (Minebea Japan)
OEM #: na (IBM?)
Spec: T8512

Frame: NEMA 23
Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)
Current: 1.4 Amp / phase
Volts: 3.5 Vdc
Torque: ___ Nm @ ___A (___ oz.in.)
Resistance: 2.5 ? Ohms / phase (nominal)
Inductance: 5.3 mH / phase (nominal)


Connector: 4/5 way x 0.1" (if fitted)
Wires: 4 wire (up to 450 mm nominal)

Shaft: 6.35mm dia x 32mm long (includes integral gear)
Shaft-Detail: Plain + 11.5 x 10 gear at end
Size: 56 x 56 x 52mm (nominal)

Supply-Max: 24~80Vdc (recommended max = V x 25)
Weight: 0.45kg

Condition: Used (refurbished)

Notes: Alternative wire colours may be used as indicated.
 Same as Vexta A2688-9212-A2

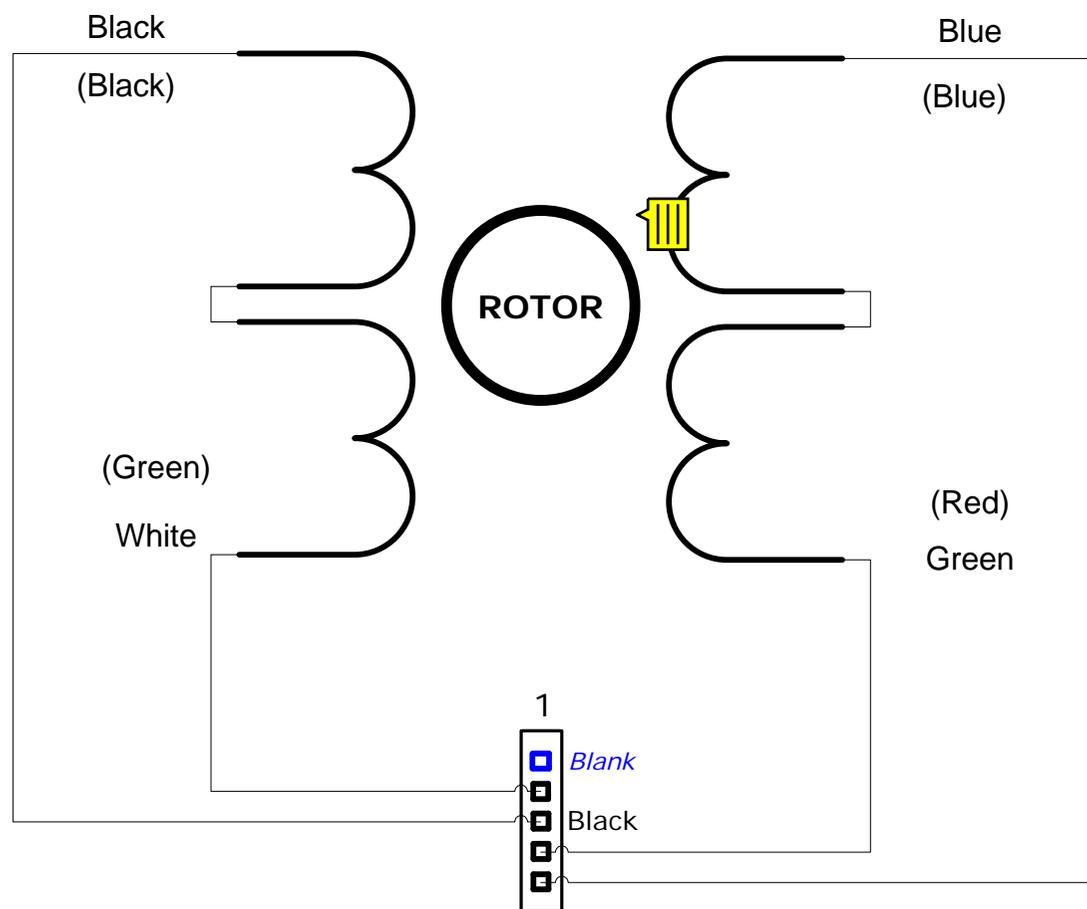

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.