



Not registered

General Data

Brand: AstroSyn (Minebea Japan)
Type: 23LM-C309-10
OEM #: H6903 (IBM?)
Frame: NEMA 23
Steps: 200 / rev (1.8 degrees per step or finer with micro-stepping)
Current: 0.85 Amp / phase
Volts: 6.0 Vdc (labeled 40V)
VA: ____
Torque: ____ Nm @ ____ A (____ oz.in.)
Resistance: 5.6 Ohms / phase (nominal)
Inductance: 10 mH / phase (nominal)
Connector: 6 pole (if fitted)
Wires: 6 wire (up to 300 mm nominal)

Shaft: 6.35 mm dia x 20 mm long
Shaft-Detail: Plain (non-flatted)
Size: 56 x 56 x 52 mm (nominal)
Weight: 0.50 kg

Supply-Max: 24~40 Vdc (recommended max = $V \times 25$)

Condition: Used (refurbished)

Comments: optional pulley may be available


Stepping Motor

Type: 23LM-C309-10



<http://www.casa.co.nz>

Edition: 17/08/2011

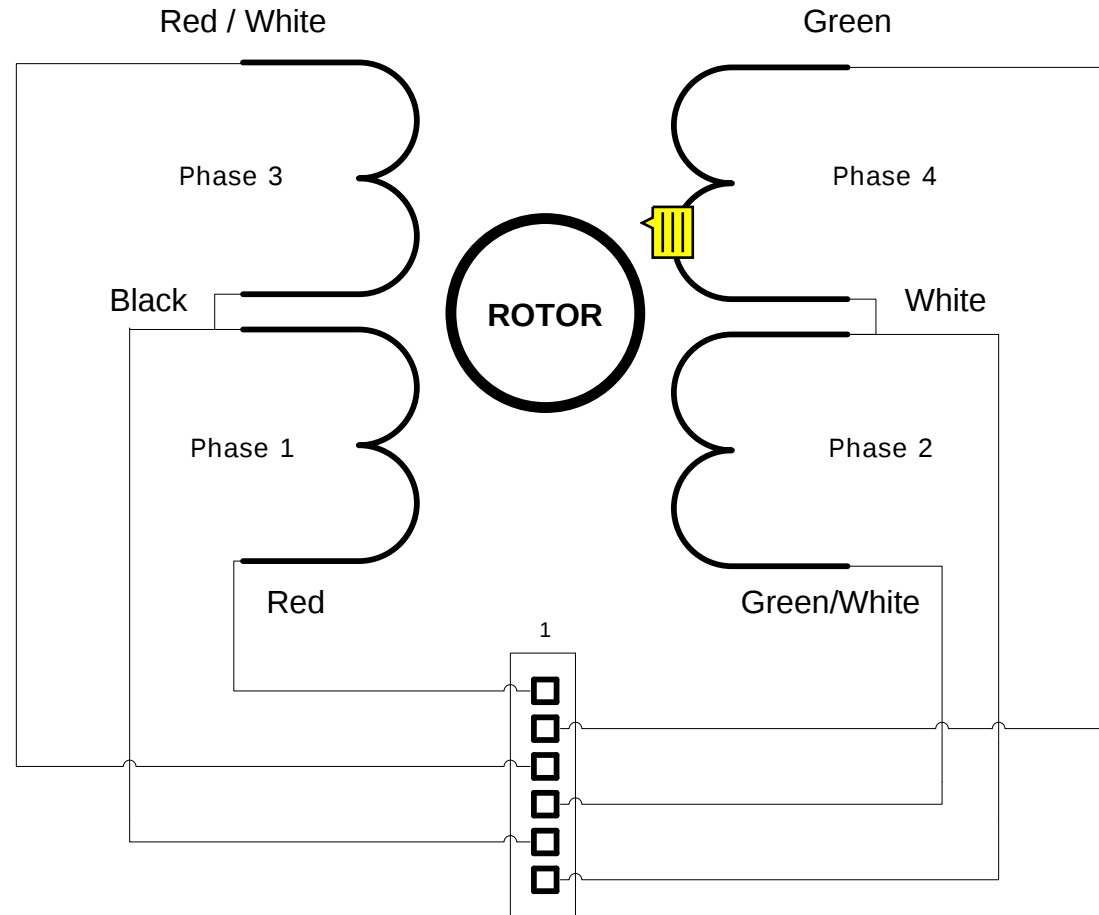

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.