



Not registered

Stepping Motor



Type: 23LM-C351-03

<http://www.casa.co.nz>

Edition: 09/05/2012

General Data

Type #: 23LM-C351-03

Brand: AstroSyn (Minebea Japan)

OEM #: 23LM-C351-03

Spec: n/a

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 0.55 Amp

Volts: 10 Vdc

Torque: ___ Nm @ ___ A (___ oz.in.)

Resistance: 18 Ohms / phase (nominal)

Inductance: 25 mH / phase (nominal)

Connector: 6 way x 0.1" (if fitted)

Wires: 6 wire (up to 110 mm nominal)

Shaft: 6.35mm dia x 19mm long

Shaft-Detail: Plain

Size: 56 x 56 x 52mm (nominal)


Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.535kg

Condition: Used (refurbished)

Comments: Resilient mount and 26mm timing pulley may be also available.

Note:

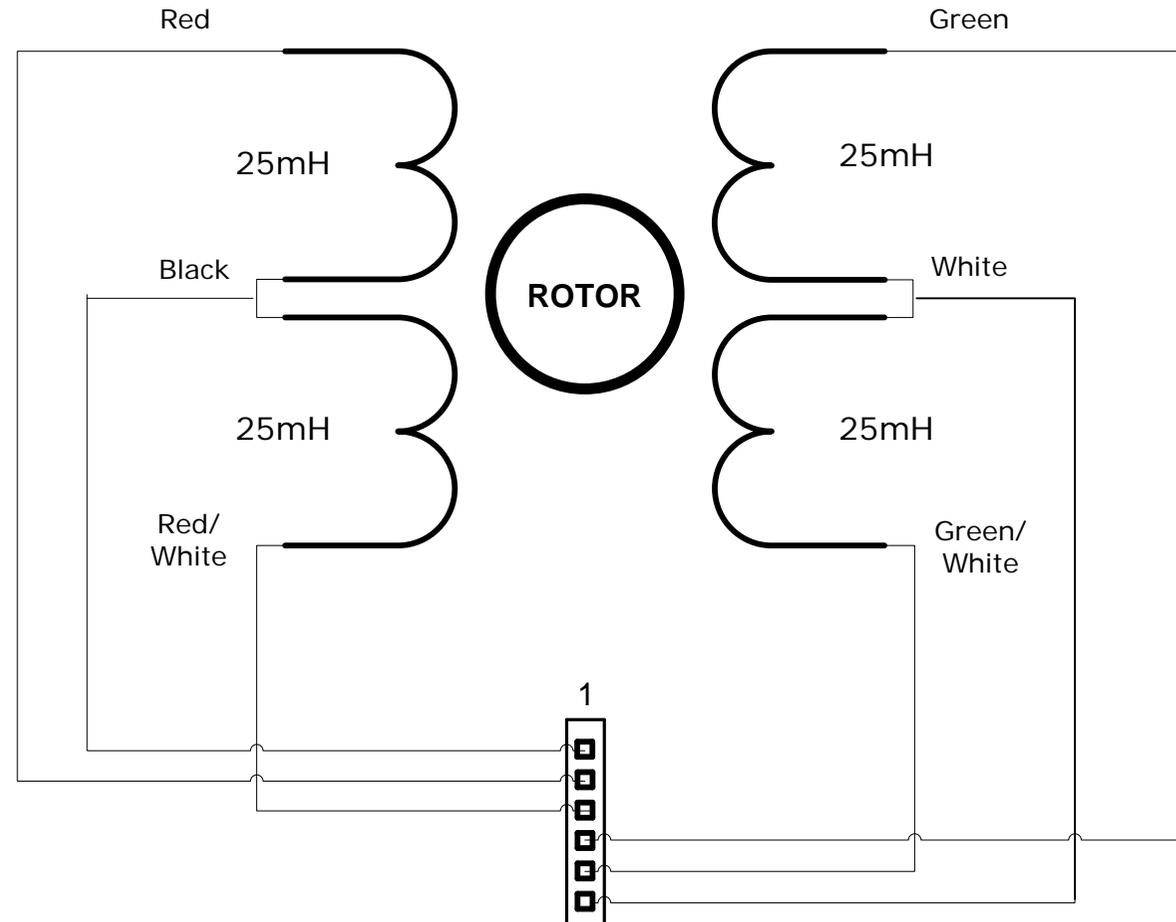

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.