

Stepping Motor



Type: **23LM-K005-P4**

<http://www.casa.co.nz>

Edition: 11/08/2011



12345-wizard.com

General Data


Brand: AstroSyn (Minebea Japan)
OEM #: 8655110 (IBM)
Frame: NEMA 23
Steps: 180? / rev (2? degrees per step or finer with micro-stepping)
Current: 0.xx Amp
Volts: 7 Vdc
Torque: ____ Nm @ ____ A (110 oz.in.)
Resistance: 20 Ohms / phase (nominal)
Inductance: 41.7 mH / phase (nominal)
Connector: None fitted
Wires: 8 wire (up to 200 mm nominal)

Shaft: 6.35 mm dia x 20 mm long
Shaft-Detail: Plain (non-flatted)
Size: 56 x 56 x 56 mm (nominal)
Weight: 0.58 kg

Supply-Max: 24~80 Vdc (recommended max = V x 25)

Condition: Used (refurbished)

Comments:

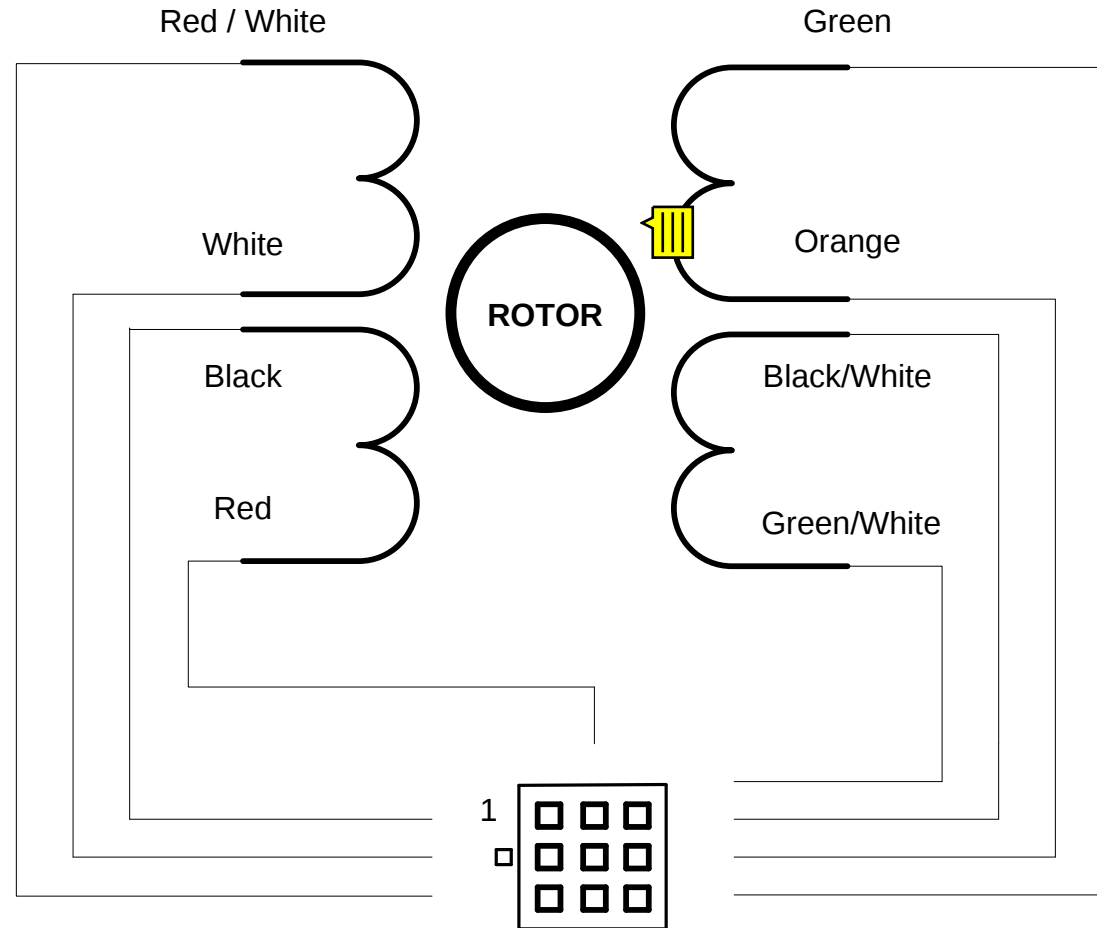

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.