

Stepping Motor – Uni-Polar

Type: 6700



<http://www.casa.co.nz>

Edition: 11/08/2011



Not registered

General Data

Brand: Sonceboz (Swiss)
Type: 6700 (103-705-4 equivalent)
OEM #: 2305679 (IBM)

Frame: 2 Hole mount
Steps: 4/rev (90 Degrees per full-step or finer with micro-stepping)
Current: 0.25 Amp Max
Volts: 24 Vdc
Torque: ___ Nm @ ___ A (18 oz.in.)
Resistance: 112 Ohms / phase (nominal)
Inductance: ~3000mH / phase **Connector:** none
Wires: 5 wire (up to 100 mm nominal)
Shaft: ~4mm dia x 12mm long
Shaft-Detail: Taper pin cross-hole.
Size: 54 x 54 x 46mm (nominal)


Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.44kg

Condition: Used (refurbished)

Comments: 5 wire uni-polar motor will not work with bi-polar controllers like the Gecko or Wantai stepper controllers.

Notes: Functionally equivalent to Sanyo Denki 103-705-4 except for inductance.

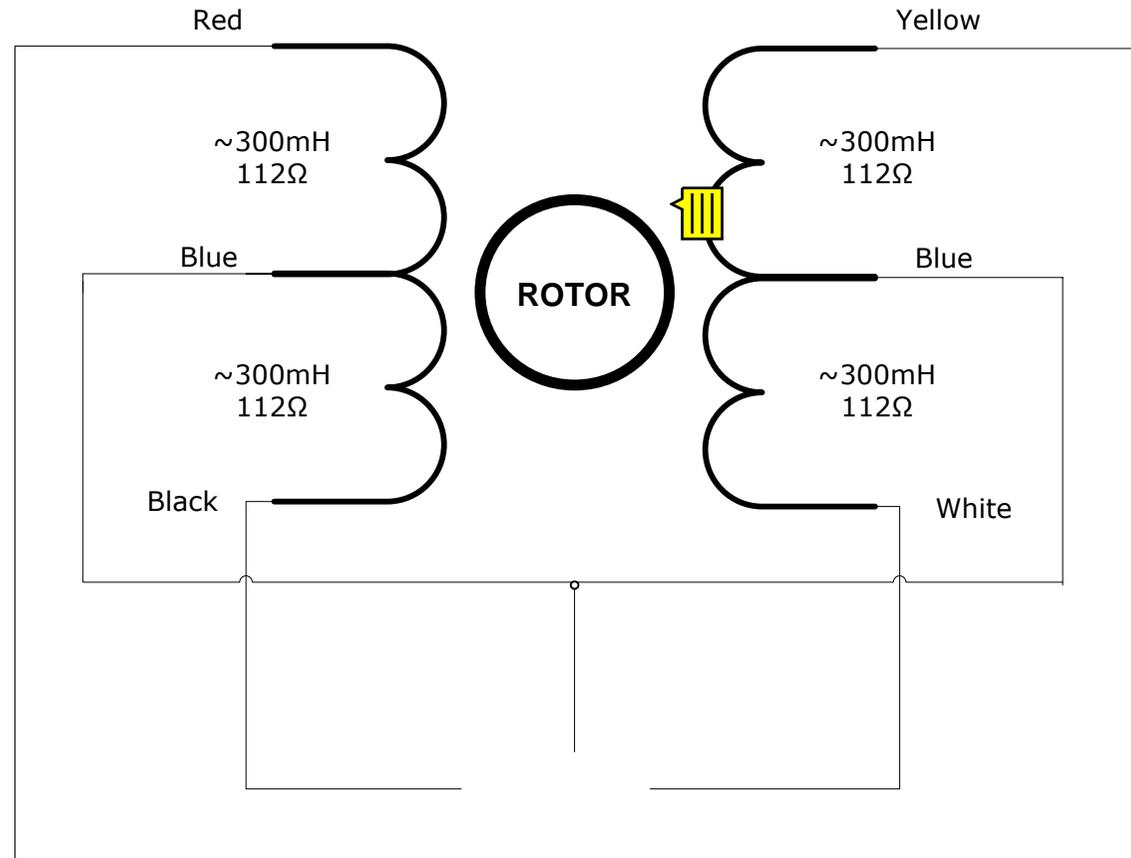

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.