

**General Data** 

Type: KR15

**Brand:** Moteurs Bertrand (France)

Style: Shunt-Wound **OEM** #: 2512943 (IBM) Frame: 60mm flange

Voltage: 24 Vdc. Current: 1.4A (int.) Output: 30 Watts (label) **Voltage-Constant:** ? **RPM**: 14 @ 24Vdc

Torque: 31 Lbf-in (3.5Nm) @ stall X.XNm operating torque @ 1.4A. **Rating:** Intermittant <?% duty. Resistance: 3 Ohms (nominal) Inductance: 89mH (field)

Connector: None

Wires: 4 x 200mm (nominal) Shaft: 8mm dia x 30mm long

**Shaft-Detail:** Plain + key, single ended.

**Size:** 75mm dia. 80 x 70mm (flange)(nominal)

Weight: 1.20 kg.

Encoder: NA Wires: NA

**Condition:** Used / tested)

Comments: Equivalent to Hely 36.15

Stall-Current (test-only):


? A @ 24 V ?A@?V

## Shunt DC Motor & Gearbox

Type: 14R-24Vdc-1A4-KR15-Bertrand



http://www.casa.co.nz Edition: 03/04/2017

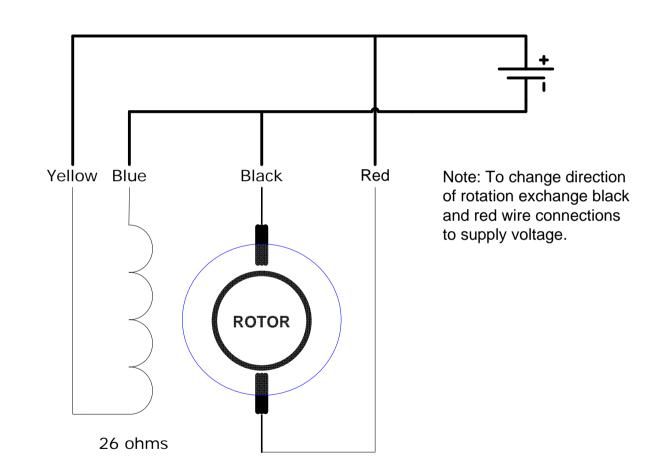

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.