

Stepping Motor



<http://www.casa.co.nz>

Edition: 15/05/2012

Type: 103G715-1240



General Data

Brand: Step-Syn (Sanyo-Denki)

OEM #: 103G715-1240

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 3.1 Amp

Volts: 2.6 Vdc

Torque: 0.9~1.1Nm @ 3A (127 ozin)

Resistance: 1.5 Ohms / phase (nominal)

Inductance: 1.43 mH / phase (nominal)

Connector: 6 way x 0.1" Molex MXO (see diag.) if fitted.

Wires: 6 wire (250mm nominal)

Shaft: 6.35mm dia x 20mm long

Shaft-Detail: Plain

Size: 56 x 56 x 82mm (nominal)


Wires: 6 wire (250mm nominal)

Supply-Max: 24~48Vdc (recommended max = V x 25)

Weight: 0.95kg

Condition: Used (refurbished)

Comments: Mounting bracket and Bowden cable winding pulley may be available.

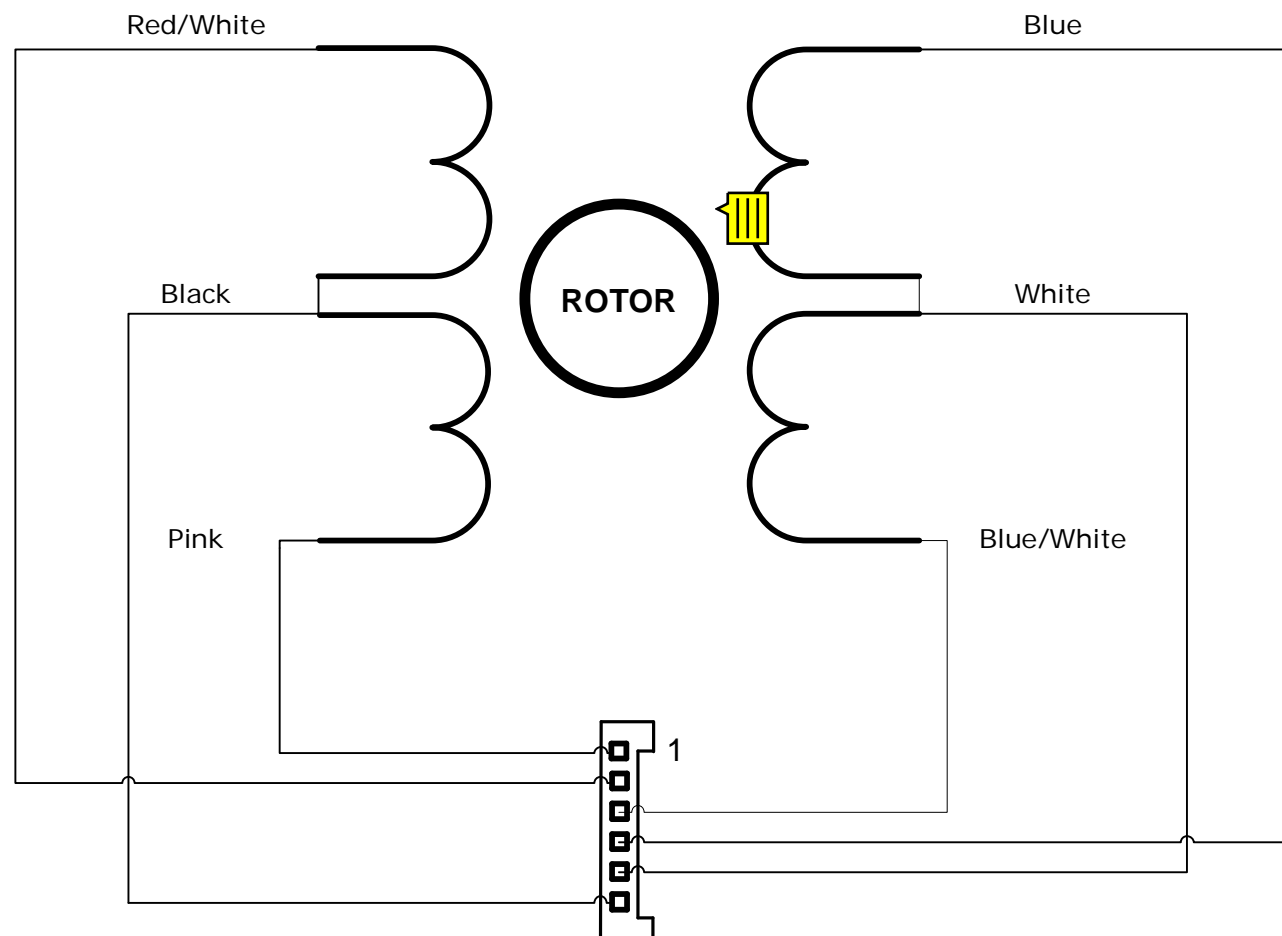

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.