

Frame: NEMA 23 Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping) Current: 1.3 Amp Volts: 3.9 Vdc Torque: ____ Nm @ ___A (__ oz.in.) Resistance: 3 Ohms / phase (nominal) Inductance: 4.3 mH / phase (nominal) Connector: 6 way x 0.1" (if fitted) Wires: 6 wire (up to 230 mm nominal) Shaft: 6.35mm dia x 19mm long Shaft-Detail: Plain Size: 57 x 57 x 52mm (nominal)

Supply-Max: 3.9~80Vdc (recommended max = V x 25) Weight: 0.563kg

Condition: Used (refurbished)

Comments: Resilient mount and 17mm timing belt pulley may be also available.

Notes: Same motor as -14 & -15, pulley may vary.


Stepping Motor



Type: 23LM-C352-08

http://www.casa.co.nz

Edition: 23/05/2012

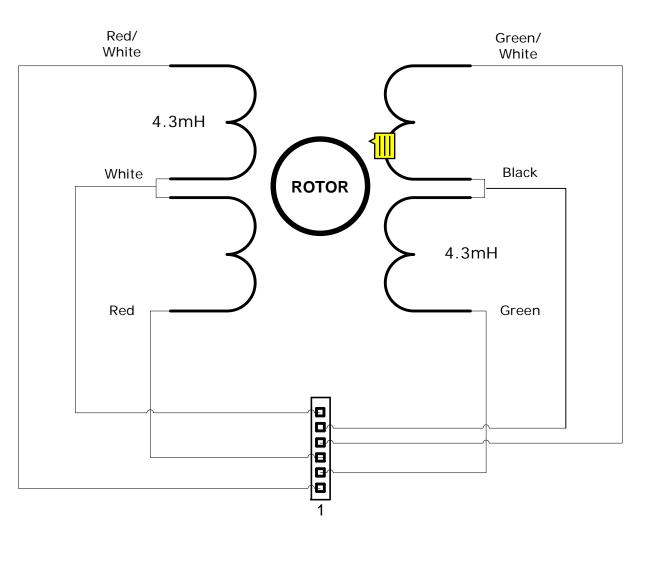

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence therefrom.