



12345-wizard.com

General Data

Type #: 894.002

Brand: Berger Lahr (USA)

OEM #: 54056-002

Frame: NEMA 17

Steps: 400/rev (0.9 Degrees per full-step or finer with micro-stepping)

Current: 0.24 Amp

Volts: 9.2 Vdc

Torque: ____ Nm @ ____A (____ oz.in.)

Resistance: 35 Ohms / phase (nominal)

Inductance: 42 mH / phase (nominal)

Connector: 5 way x 0.1" (see diag.)
(If fitted)

Wires: 4 wire (up to 80mm nominal)

Shaft: 5.0mm dia x 9mm long + 5mm
x5 mm long. Double ended

Shaft-Detail: Plain

Size: 42 x 42 x 34mm (nominal)

Supply-Max: 24~80Vdc (recommended
max = V x 25)

Weight: 0.25kg

Condition: Used (refurbished)

Notes: Optional rigid coupling may be
fitted. Optional opto-interrupter may be
fitted

Same as 5017-833


Stepping Motor

Type: 894.002



<http://www.casa.co.nz>

Edition: 12/11/2014

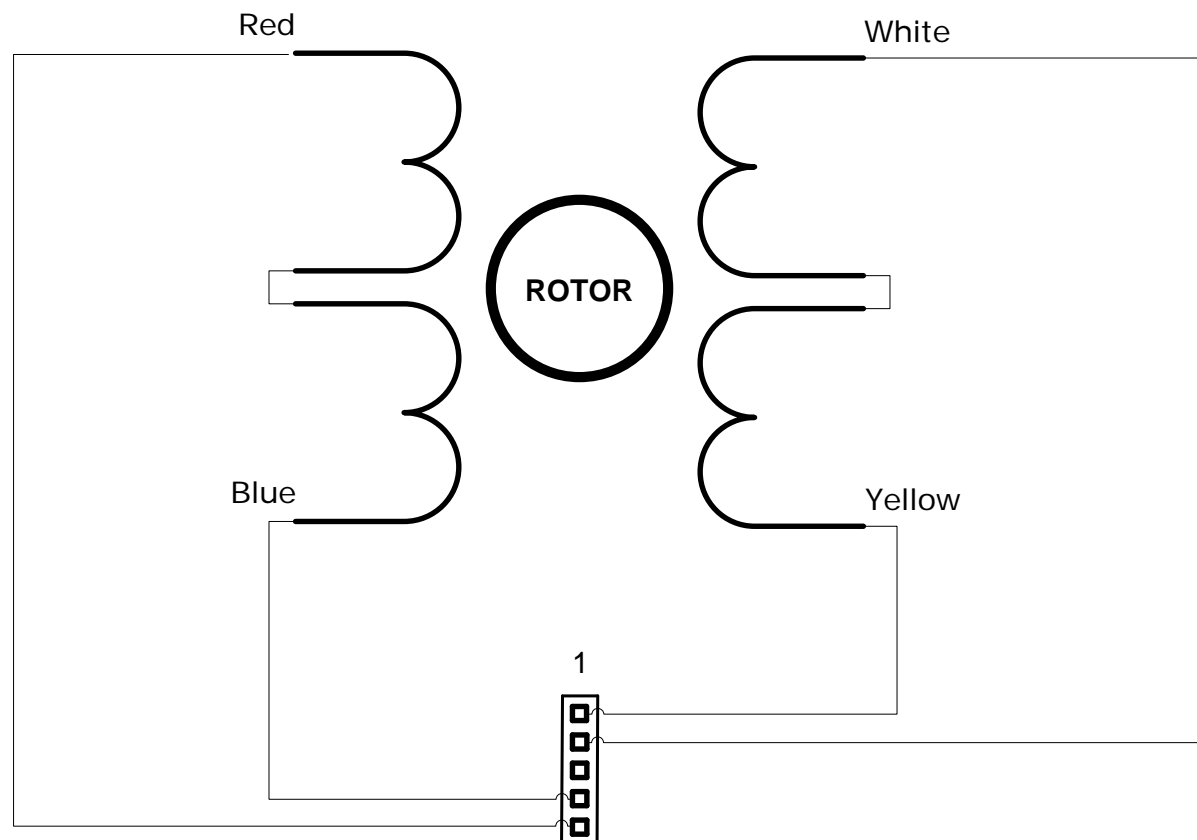

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (neither expressed nor implied) for any errors or the consequence thereof.