Stepping Motor

Type: M061-FC-306B



http://www.casa.co.nz

Edition: 19/08/2011



General Data

Type #: M061-FC-306B

Brand: Slo-Syn (Superior Electric USA)

Spec: 5562045

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per fullstep or finer with micro-stepping)

Current: 0.18 Amp

Torque: ____ Nm @ ____A (18 oz.in.) Resistance: 133/266 Ohms / phase

(nominal)

Inductance: 295/590 mH / phase

(nominal)

Connector: 7 way x 0.1" (see diag.)

i (if fitted)

Wires: 5 wire (up to 150 mm nominal)

Shaft: 6.35mm dia x 19mm long


Shaft-Detail: Plain

Size: 56 x 56 x 53mm (nominal)

Supply-Max: 24~80Vdc (recommended

max = V x 25) **Weight:** 0.52kg

Condition: Used (refurbished)

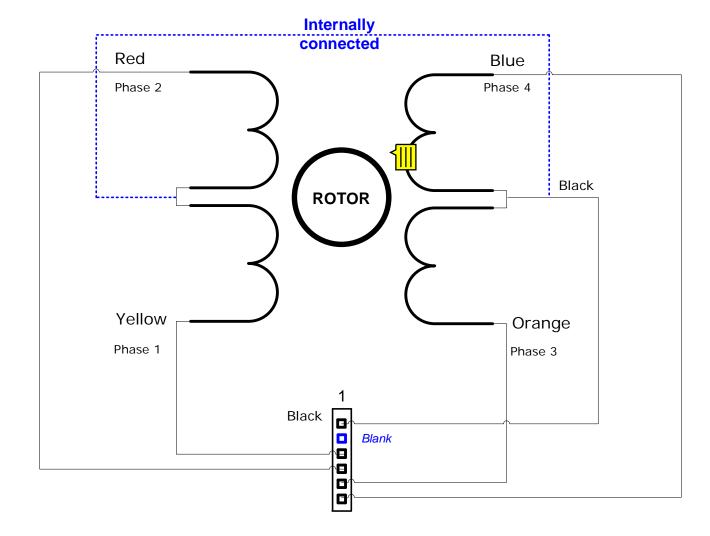

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.