



Mains Matching **AUTO** Transformer

100V~240V-1k2VA-Auto-CASA



<https://www.casa.co.nz>

Edition: 16/09/2022

Stock #: TBA

M88-2333-MTMC

General Data

Brand: CASA (encased transformer)

Type: 100V~240V-1k2VA-Auto-Cased

Model: M88-2333 (designated according to specific configuration)

OEM: MTMC

Input: 100~240Vac 50~60Hz (multi-tapped as per schematic)

Signal: Panel-lamp is lit when supply is active

Connection: IEC 3 pin chassis plug (others upon request)

Circuit Protection: Circuit-breaker in input (or output upon request)

Output: 240~100V (multiple other voltages are possible according to deployed configurations as per schematic)

Connection: 2 x 3 pole NZ/Au chassis socket (other connector options upon request)

Power: 1200VA (**continuous** rating)

Circuit Protection: Optional (fuse or circuit-breaker in output circuit upon request)


Size: 256x215x132.5mm (plus feet/standoffs & carry-handle etc.)

Weight: 9.2kg

Fixing: NA (Available by customisation)

Condition: As represented in picture (new or re-furbished stock).

Comments: Other input/output voltages can be achieved by selection of alternatives (as annotated on the schematic) **or** customised production using other available transformers etc.

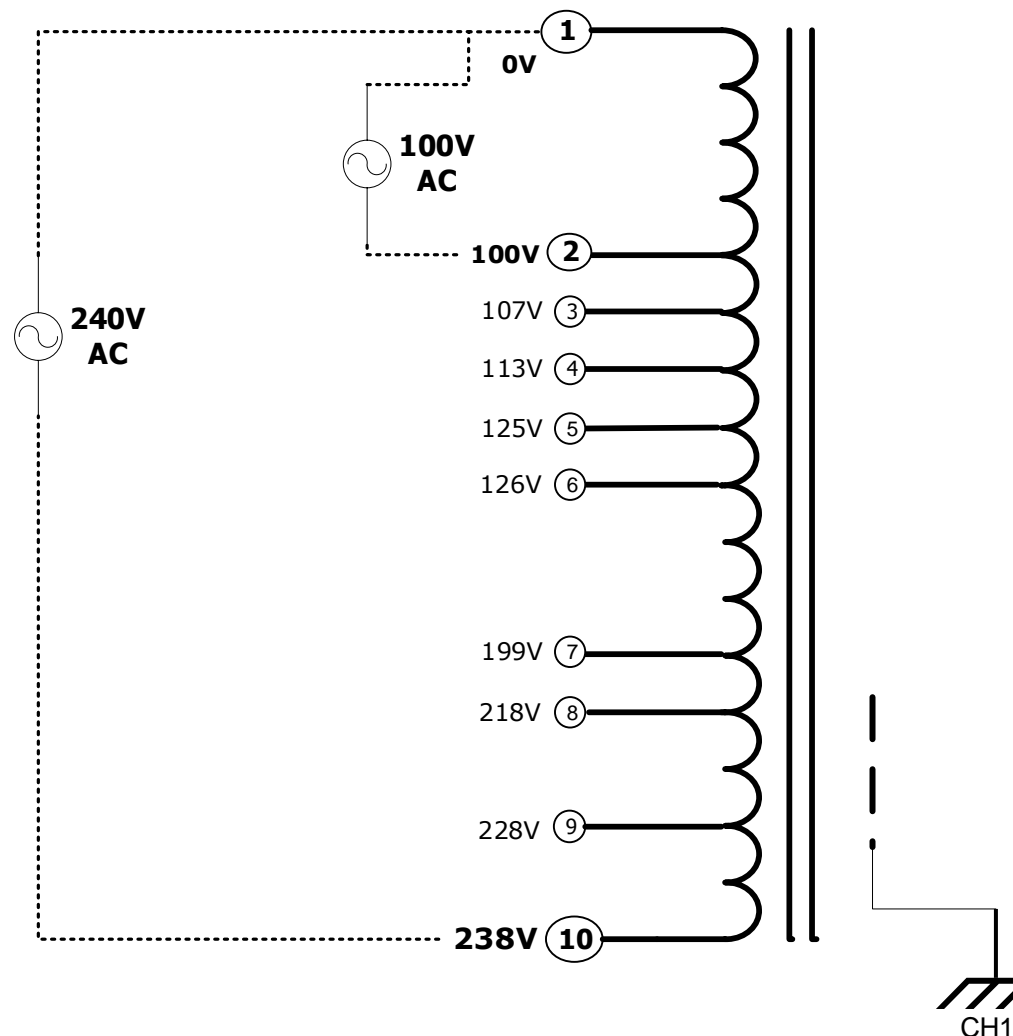

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.