





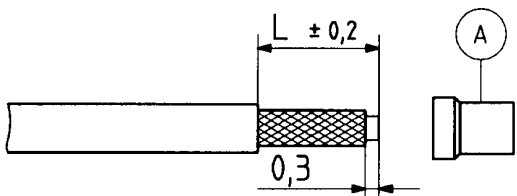
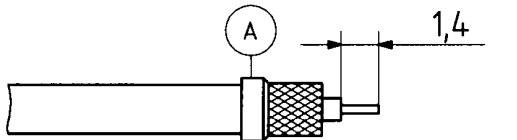


Tools and materials required: Knife or razor blade scissors Crimp tool (see table)		Straight connector for flexible cable			
		Cable entry: SUHNER Full Crimp			
		Connector types:(e.g.)			
This connector is supplied in 3 parts	Suitable cables:	RG 178 B/U	K 01152-7	MURATA	Gore CXN 2856
	Centre contact:	cavity (1) 0,75			
	Braid:	cavity 2,67			
	Crimp tool (small)	76 Z-0-2-53			
	Crimp tool (large)	76 Z-0-0-26			

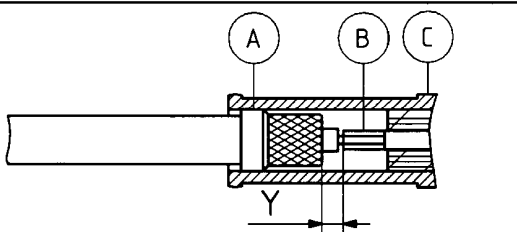

	Prepare cable according to diagram. <table><tr><th>Connector types</th><th>L</th></tr><tr><td>...MMCX 50-1-1 /-9</td><td>4,8mm</td></tr><tr><td>...MMCX 50-1-2 /-3</td><td>3,7mm</td></tr></table> Slide ferrule A over the braid until shoulder abuts the cable sheath. Fold back braid over ferrule A and trim overlapping braid.	Connector types	L	...MMCX 50-1-1 /-9	4,8mm	...MMCX 50-1-2 /-3	3,7mm
Connector types	L						
...MMCX 50-1-1 /-9	4,8mm						
...MMCX 50-1-2 /-3	3,7mm						
	Prepare cable according to diagram. CAUTION : Do not damage braid, dielectric and inner conductor of cable.						
	Push contact B over inner conductor of cable to abut cable dielectric and crimp. Control dimension Y : <table><tr><th>Connector types</th><th>Y</th></tr><tr><td>...MMCX 50-1-1 /-9</td><td>0,7...1,3mm</td></tr><tr><td>...MMCX 50-1-2 /-3</td><td>0,9...1,4mm</td></tr></table> Push contact B into the body C.	Connector types	Y	...MMCX 50-1-1 /-9	0,7...1,3mm	...MMCX 50-1-2 /-3	0,9...1,4mm
Connector types	Y						
...MMCX 50-1-1 /-9	0,7...1,3mm						
...MMCX 50-1-2 /-3	0,9...1,4mm						
	Crimp body C. Make sure that crimping is symmetrical on body C. <table><tr><th>Types</th><th>X</th></tr><tr><td>11 MMCX ...</td><td rowspan="2">typ 1,0 mm</td></tr><tr><td>21 MMCX ...</td></tr></table>	Types	X	11 MMCX ...	typ 1,0 mm	21 MMCX ...	
Types	X						
11 MMCX ...	typ 1,0 mm						
21 MMCX ...							

SUHNER's skilled staff and specialised equipment are available to carry out complete R.F.lead-assembly on your behalf. We mount your connectors on cables at economic prices! Please contact our representative for further details of this service

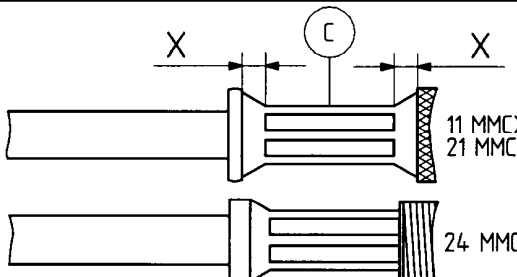

HUBER + SUHNER AG CH-9100 HERISAU

Deutscher Text siehe Rückseite