


KINGS

ELECTRONICS

TYPE N

K-GRIP IS AVAILABLE FOR THIS SERIES. SEE PAGES 106-111.

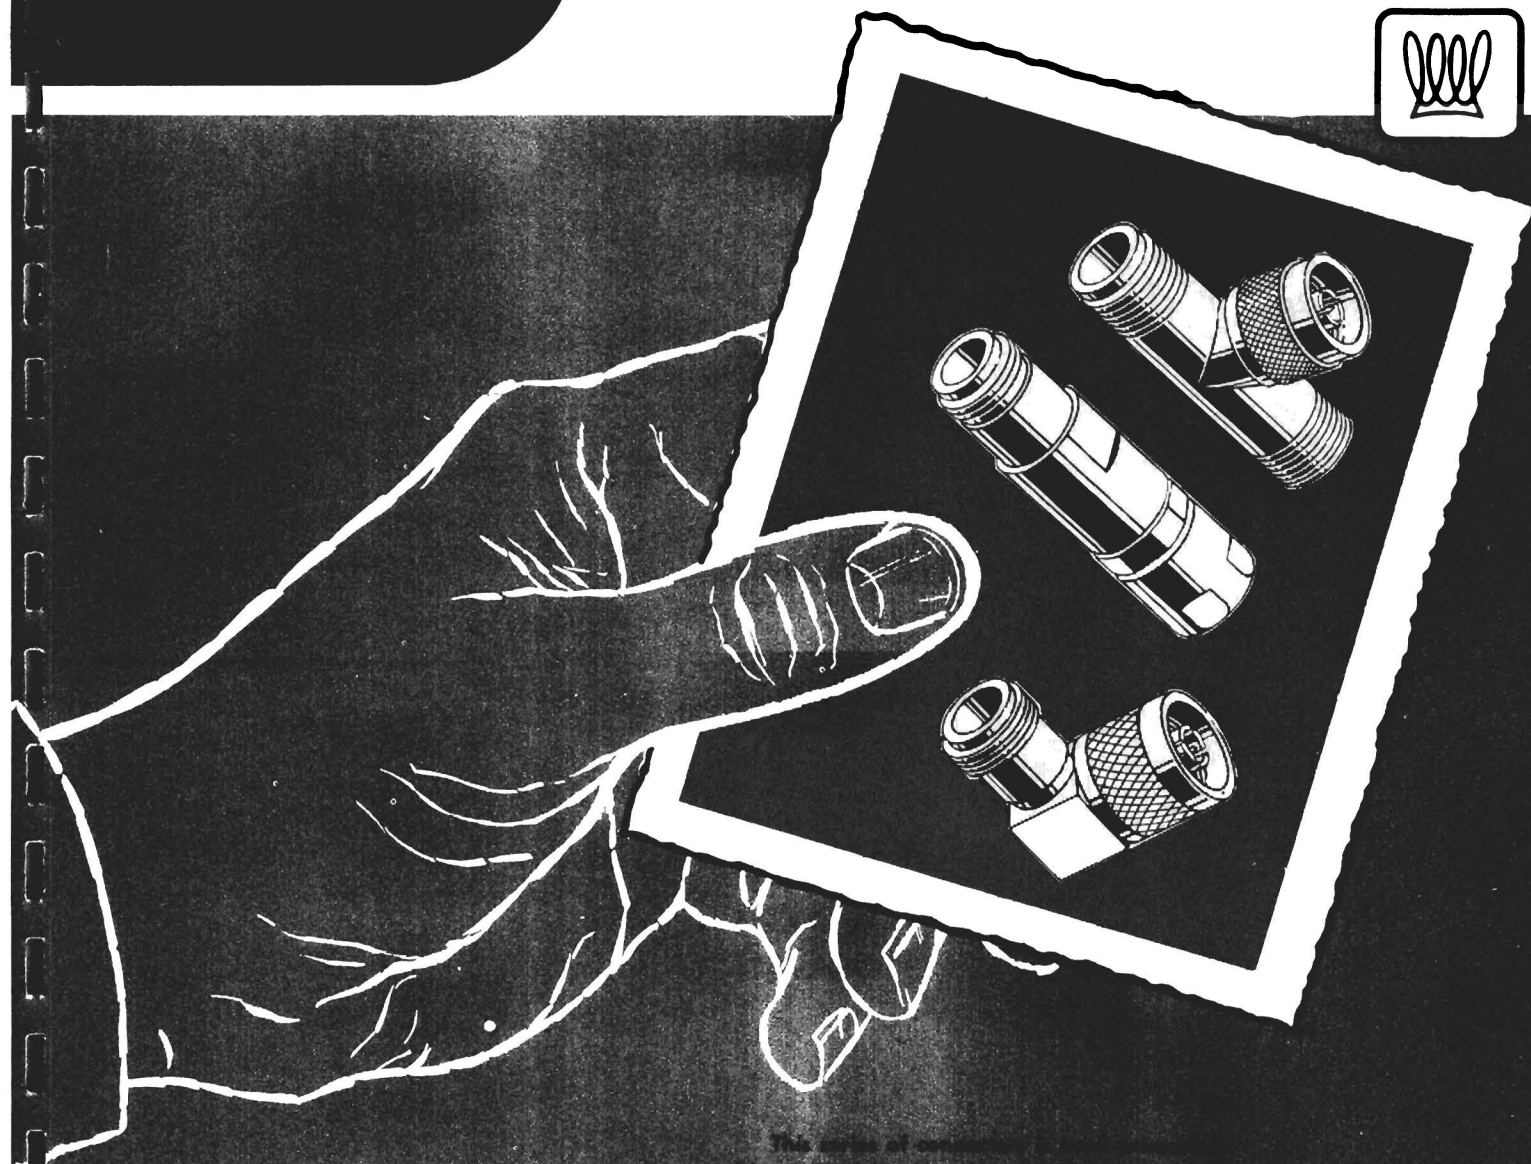

The series of sockets shown on this card are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment.

The sockets are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment.

The sockets are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment. The sockets are designed to hold the most popular vacuum tubes used in electronic equipment.

Additional type N sockets are available in the "Complete Collector's Edition."



N SERIES

MILITARY TYPE	KINGS NUMBER	DESCRIPTION	CABLE SIZE	ENGINEERING DATA	DIELECTRIC MATERIAL	KINGS NUMBER	MILITARY TYPE
UG-18A/U	KN-54-01	Plug	RG-5,21/U		Rexolite	KD-81-04	MX-1286/U
UG-18B/U	KN-57-01	Plug	RG-5,6,21/U		Teflon	KN-11-08	UG-1187/U
UG-18C/U	KN-58-03	Plug	RG-5,6,21/U		Teflon	KN-11-10	UG-593/U
UG-18D/U	KN-56-04	Plug	RG-5,6,21,212/U		Teflon	KN-12-02	UG-281/U
UG-19A/U	KN-14-01	Panel Jack	RG-5,21/U		Rexolite	KN-13-01	UG-22E/U
UG-19B/U	KN-17-01	Panel Jack	RG-5,6,21/U		Teflon	KN-14-01	UG-19A/U
UG-19C/U	KN-18-03	Panel Jack	RG-5,6,21/U		Teflon	KN-14-02	UG-22A/U
UG-19D/U	KN-16-03	Panel Jack	RG-5,6,21,212/U		Teflon	KN-14-03	UG-93A/U
UG-20A/U	KN-34-01	Jack	RG-5,21/U		Rexolite	KN-14-04	UG-96A/U
UG-20B/U	KN-37-01	Jack	RG-5,6,21/U		Teflon	KN-14-05	UG-935A/U
UG-20C/U	KN-38-03	Jack	RG-5,6,21/U		Teflon	KN-14-06	UG-936A/U
UG-20D/U	KN-36-02	Jack	RG-5,6,21,212/U		Teflon	KN-14-07	UG-1187A/U
UG-21A/U	KN-54-02	Plug	RG-8,9/U		Rexolite	KN-16-01	UG-22D/U
UG-21B/U	KN-57-02	Plug	RG-8,9/U		Teflon	KN-16-02	UG-160D/U
UG-21C/U	KN-58-02	Plug	RG-8,9/U		Teflon	KN-16-03	UG-19D/U
UG-21D/U	KN-56-01	Plug	RG-8,9/U		Teflon	KN-17-01	UG-19B/U
UG-21E/U	KN-53-02	Plug	RG-8,9,213,215/U		Teflon	KN-17-02	UG-22B/U
UG-22A/U	KN-14-02	Panel Jack	RG-8,9/U		Rexolite	KN-17-03	UG-159B/U
UG-22B/U	KN-17-02	Panel Jack	RG-8,9/U		Teflon	KN-17-04	UG-556B/U
UG-22C/U	KN-18-02	Panel Jack	RG-8,9/U		Teflon	KN-17-05	UG-935B/U
UG-22D/U	KN-16-01	Panel Jack	RG-8,9/U		Teflon	KN-17-06	UG-1095B/U
UG-22E/U	KN-13-01	Panel Jack	RG-8,9,213,215/U		Teflon	KN-18-02	UG-22C/U
UG-23A/U	KN-34-02	Jack	RG-8,9/U		Rexolite	KN-18-03	UG-19C/U
UG-23B/U	KN-37-02	Jack	RG-8,9/U		Teflon	KN-18-04	UG-160C/U
UG-23C/U	KN-38-02	Jack	RG-8,9/U		Teflon	KN-19-01	UG-1095A/U
UG-23D/U	KN-36-01	Jack	RG-8,9/U		Teflon	KN-31-08	UG-483/U
UG-23E/U	KN-33-01	Jack	RG-8,9,213,215/U		Teflon	KN-31-09	UG-484/U
UG-27A/U	KN-94-01	Adapter, Angle		M-F	Rexolite	KN-31-12	UG-602/U
UG-27B/U	KN-97-01	Adapter, Angle		M-F	Teflon	KN-31-14	UG-1186/U
UG-27C/U	KN-98-01	Adapter, Angle		M-F	Teflon	KN-33-01	UG-23E/U
UG-28A/U	KN-94-04	Adapter, Tee		F-F-F	Teflon	KN-34-01	UG-20A/U
UG-29A/U	KN-94-03	Adapter		F-F	Teflon	KN-34-02	UG-23A/U
UG-29B/U	KN-97-03	Adapter		F-F	Teflon	KN-34-03	UG-92A/U
UG-30/U	KN-91-03	Adapter, Bulkhead		F-F Pressurized	Rexolite	KN-34-04	UG-95A/U
UG-30C/U	KN-98-02	Adapter, Bulkhead		F-F Pressurized	Glass	KN-34-05	UG-160A/U
UG-30D/U	KN-96-02	Adapter, Bulkhead		F-F Pressurized	Glass	KN-34-06	UG-159A/U
UG-57B/U	KN-97-11	Adapter		M-M	Teflon	KN-34-07	UG-940A/U
UG-58/U	KN-71-01	Receptacle			Rexolite	KN-34-08	UG-1186A/U
UG-58A/U	KN-74-01	Receptacle			Teflon	KN-36-01	UG-23D/U
UG-91A/U	KN-54-03	Plug	RG-6/U	70 ohm	Teflon	KN-36-02	UG-20D/U
UG-92A/U	KN-34-03	Jack	RG-6/U	70 ohm	Teflon	KN-37-01	UG-20B/U
UG-93A/U	KN-14-03	Panel Jack	RG-6/U	70 ohm	Teflon	KN-37-02	UG-23B/U
UG-94A/U	KN-54-04	Plug	RG-11,13/U	70 ohm	Teflon	KN-37-03	UG-940B/U
UG-95A/U	KN-34-04	Jack	RG-11,13/U	70 ohm	Teflon	KN-37-05	UG-160B/U
UG-96A/U	KN-14-04	Panel Jack	RG-11,13/U	70 ohm	Teflon	KN-38-02	UG-23C/U
UG-106/U	KU-81-01	Hood	RG-8,10,12,213,215/U			KN-38-03	UG-20C/U
UG-107B/U	KN-97-02	Adapter, Tee		F-M-F	Teflon	KN-51-09	UG-188/U
UG-159A/U	KN-34-06	Jack, Bulkhead	RG-5,21/U		Teflon	KN-51-11	UG-487/U
UG-159B/U	KN-17-03	Jack, Bulkhead	RG-5,21/U		Teflon	KN-51-12	UG-486/U
UG-160A/U	KN-34-05	Jack, Bulkhead	RG-8,9/U		Teflon	KN-51-13	UG-557/U
UG-160B/U	KN-37-05	Jack, Bulkhead	RG-8,9/U		Teflon	KN-51-14	UG-982/U
UG-160C/U	KN-18-04	Jack, Bulkhead	RG-8,9/U		Teflon	KN-51-16	UG-603/U
UG-160D/U	KN-16-02	Jack, Bulkhead	RG-8,9,213,214/U		Teflon	KN-51-17	UG-1185/U
UG-167A/U	KN-54-05	Plug	RG-17/U		Teflon	KN-51-18	UG-1003/U
UG-167D/U	KN-56-02	Plug	RG-17/U		Teflon	KN-53-01	UG-176E/U

**SERIES****N****N SERIES**

MILITARY TYPE	KINGS NUMBER	DESCRIPTION	CABLE SIZE	ENGINEERING DATA	DIELECTRIC MATERIAL	KINGS NUMBER	MILITARY TYPE
UG-167E/U	KN-53-01	Plug	RG-17,218/U		Teflon	KN-53-02	UG-21E/U
UG-188/U	KN-51-09	Plug	RG-29,55,58/U		Rexolite	KN-54-01	UG-18A/U
UG-202A/U	KN-94-11	Adapter, Angle		F-F	Teflon	KN-54-02	UG-21A/U
UG-204A/U	KN-54-06	Plug	RG-14/U		Rexolite	KN-54-03	UG-91A/U
UG-204C/U	KN-58-04	Plug	RG-14/U		Teflon	KN-54-04	UG-94A/U
UG-231/U	KN-71-02	Receptacle			Rexolite	KN-54-05	UG-167A/U
UG-281/U	KN-12-02	Panel Jack	RG-55,58/U		Rexolite	KN-54-06	UG-204A/U
M-360	See UG-106/U					KN-54-08	UG-536/U
UG-483/U	KN-31-08	Jack	RG-81/U		Teflon	KN-54-10	UG-941A/U
UG-484/U	KN-31-09	Jack	RG-82/U		Teflon	KN-54-11	UG-536A/U
UG-486/U	KN-51-12	Plug	RG-81/U		Teflon	KN-54-12	UG-603A/U
UG-487/U	KN-51-11	Plug	RG-82/U		Teflon	KN-54-13	UG-557A/U
UG-536/U	KN-54-08	Plug	RG-55,58/U		Rexolite	KN-54-14	UG-1185 A/U
UG-536A/U	KN-54-11	Plug	RG-55,58/U		Teflon	KN-56-01	UG-21D/U
UG-536B/U	KN-57-05	Plug	RG-55,58,223/U		Teflon	KN-56-02	UG-167D/U
UG-556B/U	KN-17-04	Jack, Bulkhead	RG-55,58,223/U		Teflon	KN-56-04	UG-18D/U
UG-557/U	KN-51-13	Plug	RG-117/U		Teflon	KN-57-01	UG-18B/U
UG-557A/U	KN-54-13	Plug	RG-117,118/U	Includes armor clamp	Teflon	KN-57-02	UG-21B/U
MX-564/U	KN-81-01	Armor Clamp	RG-10,12/U			KN-57-05	UG-536B/U
MX-564A/U	KN-84-01	Armor Clamp	RG-10,12/U			KN-57-06	UG-941B/U
UG-593/U	KN-11-10	Panel Jack	RG-59,62,71/U		Rexolite	KN-58-02	UG-21C/U
UG-602/U	KN-31-12	Panel Jack	RG-59,62,71/U		Rexolite	KN-58-03	UG-18C/U
UG-603/U	KN-51-16	Plug	RG-59,62,71/U		Rexolite	KN-58-04	UG-204C/U
UG-603A/U	KN-54-12	Plug	RG-59,62,71/U		Teflon	KN-71-01	UG-58/U
MX-913/U	KN-81-03	Cap & Chain				KN-71-02	UG-231/U
UG-935A/U	KN-14-05	Panel Jack	RG-10,12/U		Teflon	KN-74-01	UG-58A/U
UG-935B/U	KN-17-05	Panel Jack	RG-10,12,215/U	Includes Armor Clamp	Teflon	KN-81-01	MX-564/U
UG-936A/U	KN-14-06	Jack, Bulkhead	RG-10,12/U		Teflon	KN-81-03	MX-913/U
UG-940A/U	KN-34-07	Jack	RG-10,12/U		Teflon	KN-81-04	MX-1441/U
UG-940B/U	KN-37-03	Jack	RG-8,9,10,213, 214,215/U	Includes Armor Clamp	Teflon	KN-81-05	MX-1462/U
UG-941A/U	KN-54-10	Plug	RG-10,12/U		Teflon	KN-84-01	MX-564A/U
UG-941B/U	KN-57-06	Plug	RG-8,9,10,213, 214,215/U	Includes Armor Clamp	Teflon	KN-91-03	UG-30/U
UG-982/U	KN-51-14	Plug	RG-18/U RG-219/U	Similar to UG-167D/U except uses armor clamp	Teflon	KN-94-01	UG-27A/U
UG-1003/U	KN-51-18	Plug	RG-63,114/U		Teflon	KN-94-03	UG-29A/U
UG-1095A/U	KN 19-01	Panel Jack	RG-55,58,223/U		Teflon	KN-94-04	UG-28A/U
UG-1095B/U	KN-17-06	Panel Jack	RG-55,58,223/U		Teflon	KN-94-11	UG-202A/U
UG-1185/U	KN-51-17	Plug	RG-8,9/U	Similar to UG-21D/U except center contact is captivated	Teflon	KN-96-02	UG-30D/U
UG-1185A/U	KN-54-14	Plug	RG-8,9,213,214/U		Teflon	KN-97-01	UG-27B/U
						KN-97-02	UG-107B/U
						KN-97-03	UG-29B/U
						KN-97-11	UG-57B/U
						KN-98-01	UG-27C/U
						KN-98-02	UG-30C/U
						KU-81-01	UG-106/U

SEX OF CONTACTS IS INDICATED BY LETTERS "F" AND "M"



N SERIES

MILITARY TYPE	KINGS NUMBER	DESCRIPTION	CABLE SIZE	ENGINEERING DATA	DIELECTRIC MATERIAL
UG-1186/U	KN-31-14	Jack	RG-8,9/U	Similar to UG-23D/U except center contact is captivated	Teflon
UG-1186A/U	KN-34-08	Jack	RG-8,9,213,214/U		Teflon
UG-1187/U	KN-11-08	Panel Jack	RG-8,9/U	Similar to UG-22D/U except center contact is captivated	Teflon
UG-1187A/U	KN-14-07	Panel Jack	RG-8,9,213,214/U		Teflon
MX-1286/U	KD-81-04	Armor Clamp	RG-10,12,215/U		
MX-1441/U	KN-81-04	Armor Clamp	RG-18,219/U	Clamps Armor to Type N Connector	
MX-1462/U	KN-81-05	Armor Clamp	RG-74/U	Clamps Armor to Type N Connector	

N ADAPTERS TO OTHER SERIES

SERIES	CONTACTS	MILITARY TYPE	KINGS NUMBER	ENGINEERING DATA	DIELECTRIC MATERIAL	KINGS NUMBER	MILITARY TYPE
BN to N	F-M	UG-605/U	KB-91-05		Teflon	KB-91-05	UG-605/U
N to BNC	M-F	UG-201/U UG-201A/U	KN-91-04 KN-94-05		Rexolite & Teflon Teflon	KC-91-05	UG-335/U
N to BNC	F-M	UG-335/U UG-349/U UG-349A/U	KC-91-05 KC-91-07 KN-94-09		Rexolite & Teflon Rexolite & Teflon Teflon	KC-91-07	UG-349/U
N to C	M-F	UG-564/U	KD-91-01		Teflon	KD-91-01	UG-564/U
N to C	F-M	UG-565/U UG-565A/U	KD-91-02 KD-94-01		Teflon Teflon	KD-91-02	UG-565/U
N to Holmdel	M-M	UG-7/AP	KN-91-20		Rexolite	KD-94-01	UG-565A/U
N to Holmdel	F-F	UG-8/AP	KN-91-21		Rexolite	KL-94-02	UG-213A/U
N to LC (1)	F-F	UG-270/U UG-270A/U	KV-91-07 KV-94-04		Polyethylene Polyethylene	KN-91-04	UG-201/U
N to LC (1)	F-F	UG-271/U UG-271A/U	KV-91-13 KV-94-05		Polyethylene Polyethylene	KN-91-05	UG-146/U
N to LC (1)	F-M	UG-999A/U	KV-94-01		Teflon	KN-91-06	UG-83/U
N to LN	F-F	UG-108A/U	KN-94-07		Teflon	KN-91-13	UG-131/U
N to LN	M-M	UG-213A/U	KL-94-02		Teflon	KN-91-20	UG-7/AP
N to UHF	F-M	UG-83/U UG-83A/U UG-83B/U	KN-91-06 KN-94-06 KN-97-04		Rexolite & Phenolic Rexolite Teflon	KN-91-21	UG-8/AP
N to UHF	M-F	UG-146/U	KN-91-05		Rexolite & Phenolic	KN-91-22	UG-318/U
N to UHF	M-M	UG-318/U	KN-91-22		Rexolite & Phenolic	KN-94-05	UG-201A/U
N to SKL	F-F	UG-131/U	KN-91-13		Rexolite	KN-94-06	UG-83A/U
						KN-94-07	UG-108A/U
						KN-94-09	UG-349A/U
						KN-97-04	UG-83B/U
						KV-91-07	UG-270/U
						KV-91-13	UG-271/U
						KV-94-01	UG-999A/U
						KV-94-04	UG-270A/U
						KV-94-05	UG-271A/U

1. MATES WITH TYPE LC UG-154/U OR EQUIVALENT.


SEX OF CONTACTS IS INDICATED BY LETTERS "F" AND "M".

ASTERISKS (*) ON FOLLOWING PAGES INDICATE ILLUSTRATED CONNECTORS.



SERIES

N

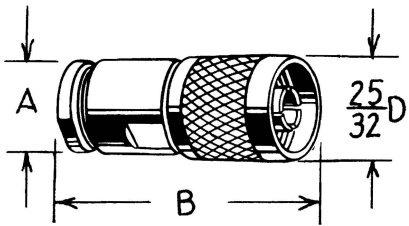


PLUGS — 50 ohm

	A	B
UG-18A/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-18B/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-18C/U	$\frac{3}{4}$ D.	$1\frac{1}{2}$
UG-18D/U	$\frac{3}{4}$ D.	$1\frac{1}{2}$
UG-21A/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-21B/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-21C/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
* UG-21D/U	$\frac{3}{4}$ D.	$1\frac{1}{2}$
UG-21E/U	$\frac{3}{4}$ D.	$1\frac{1}{2}$
UG-486/U	$1\frac{1}{16}$ Hex.	$1\frac{25}{64}$
UG-536/U	$1\frac{1}{16}$ D.	$1\frac{47}{64}$
UG-536A/U	$\frac{1}{2}$ D.	$1\frac{25}{64}$
UG-536B/U	$\frac{1}{2}$ D.	$1\frac{13}{32}$
UG-603/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-603A/U	$\frac{1}{2}$ D.	$1\frac{25}{64}$
UG-1003/U	$1\frac{1}{16}$ D.	$1\frac{49}{64}$
UG-1185/U	$\frac{3}{4}$ D.	$1\frac{1}{2}$
UG-1185A/U	$\frac{3}{4}$ D.	$1\frac{33}{64}$


PLUGS — 70 ohm

	A	B
UG-91A/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$
UG-94A/U	$1\frac{1}{16}$ D.	$1\frac{53}{64}$

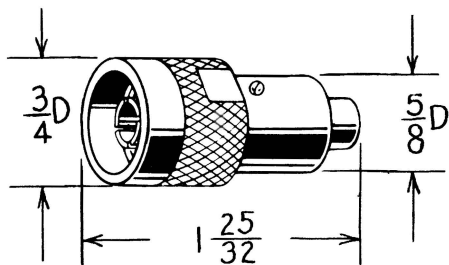


PLUG — 50 ohm

UG-188/U

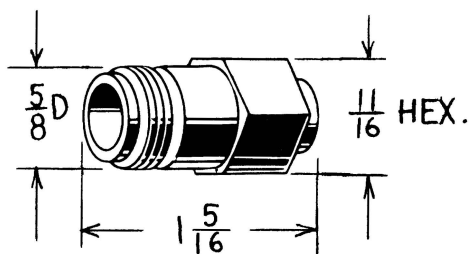


JACK — 50 ohm

UG-483/U

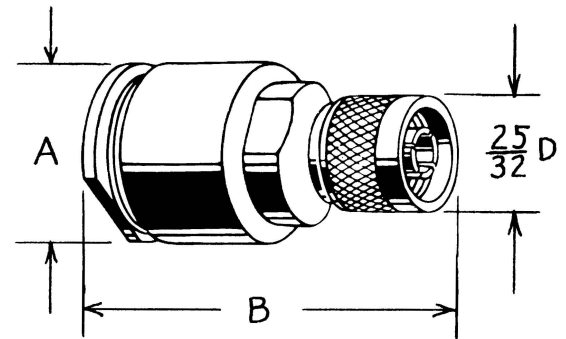


PLUGS — 50 ohm

	A	B
UG-167A/U	$1\frac{1}{16}$ D.	$2\frac{5}{8}$
* UG-167D/U	$1\frac{1}{16}$ D.	$2\frac{11}{64}$
UG-167E/U	$1\frac{1}{16}$ D.	$2\frac{11}{64}$
UG-204A/U	1 D.	2
UG-204C/U	$\frac{7}{8}$ D.	$1\frac{43}{64}$
UG-487/U	$1\frac{1}{4}$ D.	$1\frac{47}{64}$
UG-557/U	$1\frac{1}{16}$ D.	$2\frac{25}{64}$

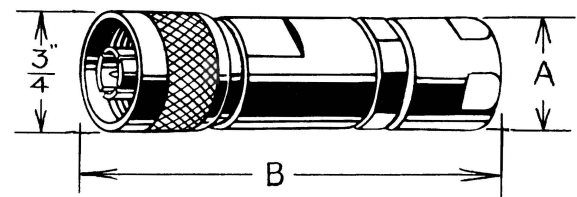

PLUGS — 50 ohm


	A	B
UG-557A/U	$1\frac{1}{16}$ D.	$3\frac{3}{4}$
* UG-941A/U	$\frac{3}{4}$ D.	$2\frac{1}{16}$
UG-941B/U	$\frac{3}{4}$ D.	$2\frac{1}{16}$
UG-982/U	$1\frac{1}{16}$ D.	$3\frac{1}{32}$

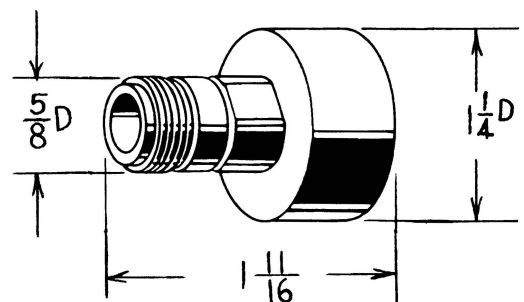

JACK — 50 ohm

UG-484/U


THE
KING'S
NAME
ASSURES YOU
OF PRODUCTS
OF UTMOST
EFFICIENCY
AND
RELIABILITY.

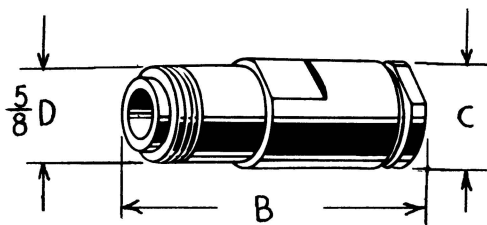**JACKS — 50 ohm**

	B	C
UG-20A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-20B/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-20C/U	$1\frac{1}{16}$	$\frac{3}{4}$ D.
UG-20D/U	$1\frac{1}{16}$	$\frac{3}{4}$ D.
UG-23A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-23B/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-23C/U	$1\frac{13}{16}$	$\frac{11}{16}$ D.
* UG-23D/U	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-23E/U	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-602/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-1186/U	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-1186A/U	$1\frac{19}{32}$	$\frac{3}{4}$ D.

JACKS — 70 ohm

UG-92A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-95A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.

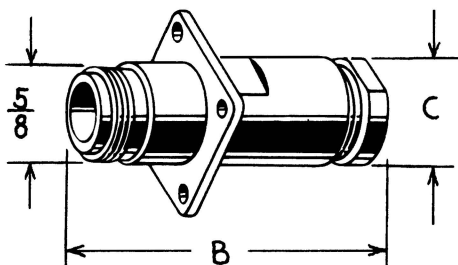


See Mounting
Diagram #1

PANEL JACKS — 50 ohm


	B	C
UG-19A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-19B/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-19C/U	$1\frac{1}{16}$	$\frac{3}{4}$ D.
UG-19D/U	$1\frac{1}{16}$	$\frac{3}{4}$ D.
UG-22A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-22B/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-22C/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
* UG-22D/U	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-22E/U	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-281/U	$1\frac{13}{32}$	$\frac{3}{4}$ D.
UG-593/U	$1\frac{57}{64}$	$\frac{11}{16}$ D.
UG-1095A/U	$1\frac{13}{32}$	$\frac{7}{16}$ D.
UG-1095B/U	$1\frac{13}{32}$	$\frac{7}{16}$ D.
UG-1187	$1\frac{37}{64}$	$\frac{3}{4}$ D.
UG-1187A/U	$1\frac{19}{32}$	$\frac{3}{4}$ D.

PANEL JACKS — 70 ohm


UG-93A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.
UG-96A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.

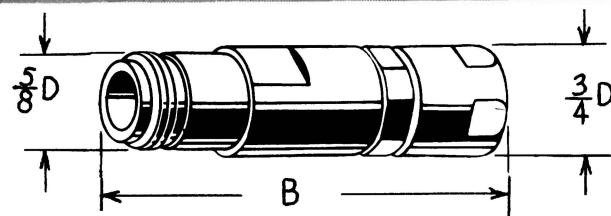**JACKS — 50 ohm**


	MOUNTING	B
UG-935A/U	#1	$2\frac{5}{16}$
UG-935B/U	#1	$2\frac{5}{16}$
UG-936A/U	#2	$2\frac{25}{64}$
* UG-940A/U	None	$2\frac{3}{16}$
UG-940B/U	None	$2\frac{3}{16}$

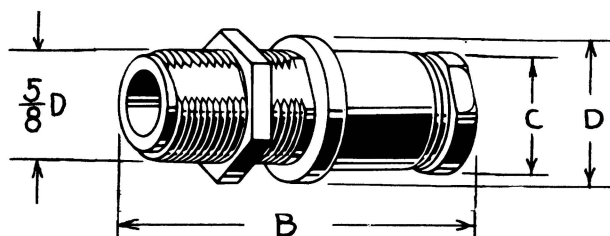**PANEL JACKS — 50 ohm**

	B	C	D
UG-159A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.	$\frac{13}{16}$ D.
UG-159B/U	$1\frac{29}{32}$	$\frac{3}{4}$ D.	$\frac{7}{8}$ D.
UG-160A/U	$1\frac{29}{32}$	$\frac{11}{16}$ D.	$\frac{13}{16}$ D.
UG-160B/U	$1\frac{27}{32}$	$\frac{11}{16}$ D.	$\frac{13}{16}$ D.
* UG-160C/U	$1\frac{25}{32}$	$\frac{3}{4}$ D.	$\frac{7}{8}$ D.
UG-160D/U	$1\frac{29}{32}$	$\frac{3}{4}$ D.	$\frac{7}{8}$ D.
UG-556B/U	$1\frac{11}{16}$	$\frac{1}{2}$ D.	$\frac{13}{16}$ D.

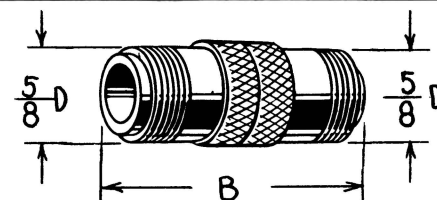**ADAPTERS — 50 ohm**

	B
UG-29A/U	$1\frac{1}{2}$
* UG-29B/U	$1\frac{3}{4}$



See Mounting
Diagram #1


RECEPTACLES — 50 ohm

	B	C	D
UG-58/U	$1\frac{3}{32}$	$\frac{37}{64}$ D.	$\frac{1}{8}$ D.
* UG-58A/U	$1\frac{3}{32}$	$\frac{11}{16}$ D.	$\frac{1}{8}$ D.
UG-231/U	$1\frac{3}{4}$	$\frac{3}{4}$ D.	#4-40 NC-2




SERIES

N

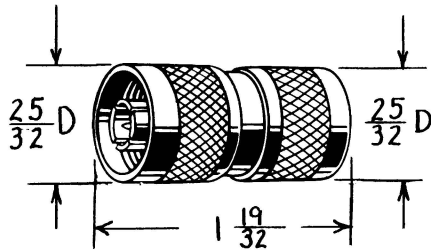


ADAPTER — 50 ohm

UG-57B/U MM

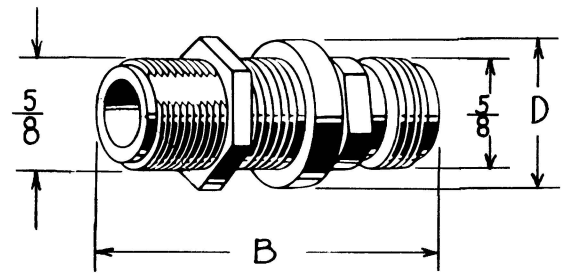


ADAPTERS — 50 ohm

	B	D
UG-30/U	1 13/16	1 13/16 D.
* UG-30C/U	1 3/4	1 13/16 D.
UG-30D/U	1 17/32	7/8 D.

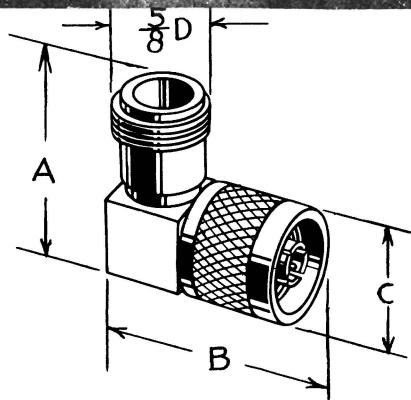


ADAPTERS, ANGLE — 50 ohm

	A	B	C
UG-27A/U FM	1 15/64	1 13/32	25/32 D.
UG-27B/U FM	1 15/64	1 13/32	25/32 D.
* UG-27C/U FM	1 3/8	1 21/64	25/32 D.
UG-202A/U FF 5/8 D. Hole Mtg.	1 21/64	2	7/8 D.

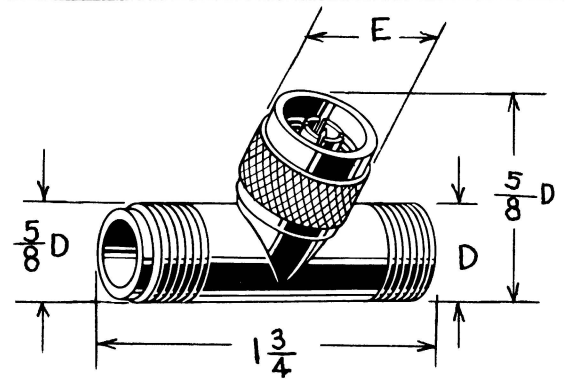


ADAPTERS, TEE — 50 ohm

	D	E
UG- 28A/U FFF	1 17/32	5/8 D.
* UG-107B/U FMF	1 5/64	25/32 D.




ARMOR CLAMPS — 50 ohm

	A	B	C
MX-564/U	1 1/8 D.	5 1/64	5/8 D.
* MX-564A/U	3/4 D.	1 1/64	5/8 D.
MX-1286/U	3/4 D.	1 1/32	1 1/16 D.
MX-1441/U	1 3/16 D.	1 25/64	1 1/4 D.
MX-1462/U	7/8 D.	1 1/6	1 3/16 D.



HOOD



UG-106/U (49193)




CAP & CHAIN

MX-913/U

MOUNTING DIAGRAMS



CABLING INSTRUCTIONS

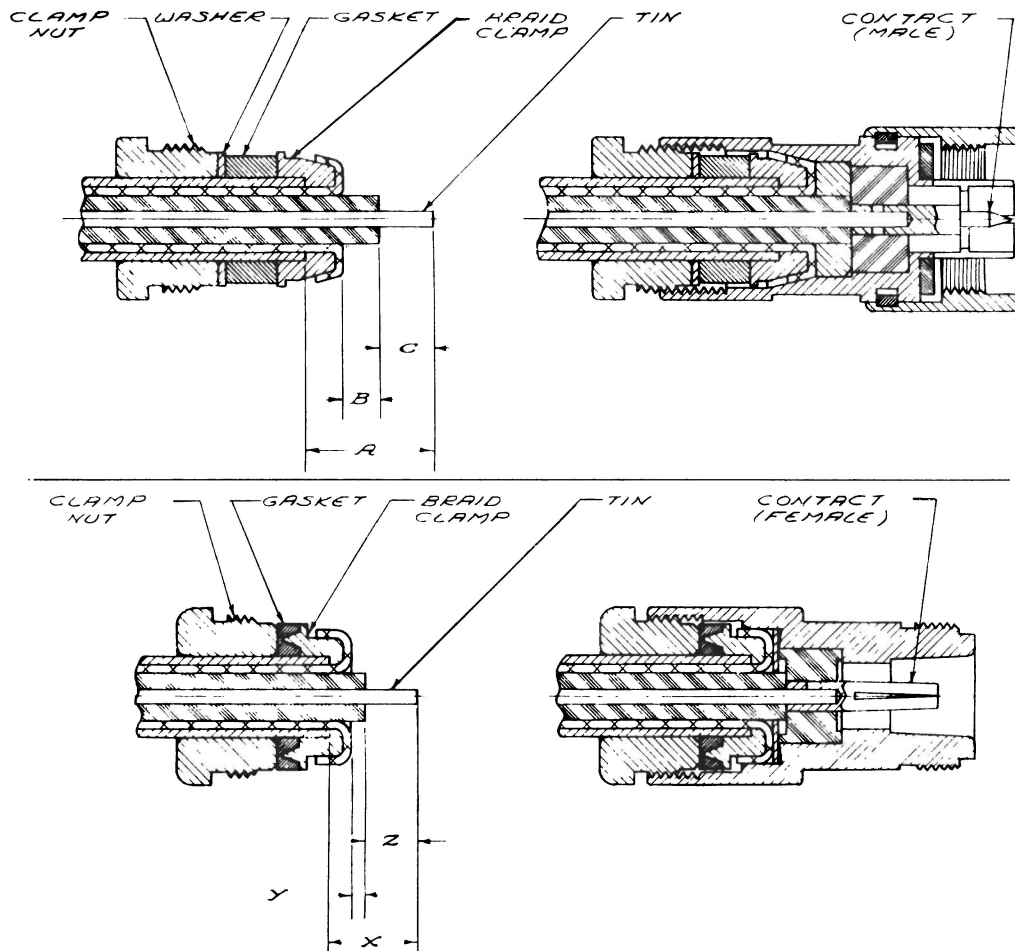

CONNECTOR	X	Y	Z
UG-18 C/U, UG-18 D/U, UG-19 C/U, UG-19 D/U, UG-20 C/U, UG-20 D/U, UG-21 D/U, UG-21 E/U, UG-22 D/U, UG-22 E/U, UG-23 D/U, UG-23 E/U, UG-159 B/U, UG-160 C/U, UG-160 D/U,	$\frac{11}{32}$	.045	$\frac{3}{16}$
UG-167 D/U, UG-167 E/U, UG-204 C/U	$\frac{3}{8}$	.062	$\frac{3}{16}$
UG-536 A/U, UG-536 B/U,	$\frac{3}{8}$	.125	$\frac{3}{16}$
UG-556 B/U,	$\frac{19}{32}$	.384	$\frac{1}{8}$
UG-1003 /U	$\frac{1}{2}$	.198	$\frac{1}{8}$
UG-1095 A/U, UG-1095 B/U,	$\frac{11}{32}$	.121	$\frac{1}{8}$
UG-1185/U, UG-1185 A/U, UG-1186/U, UG-1186 A/U, UG-1187/U, UG-1187 A/U	$\frac{11}{32}$	.048	$\frac{3}{16}$

CONNECTOR	A	B	C
UG-18 A/U, UG-18 B/U, UG-19 A/U, UG-19 B/U, UG-20 A/U, UG-20 B/U, UG-21 A/U, UG-21 B/U, UG-22 A/U, UG-22 B/U, UG-23 A/U, UG-23 B/U, UG-159 A/U, UG-160 A/U, UG-536 /U, UG-593/U, UG-602/U, UG-603/U,	$\frac{1}{2}$	.138	$\frac{3}{16}$
UG-167 A/U,	$\frac{3}{16}$	.203	$\frac{3}{16}$
UG-204 A/U,	$\frac{7}{16}$	.125	$\frac{3}{16}$
UG-557/U,	$\frac{17}{32}$	.187	$\frac{3}{16}$