





CASA Type: RBE-1Ux100-MS20(fin)

Insert code to represent optional rear fixing holes or PEM fasteners

- Optional sub-rack rear fixing holes options include:
- 10.5 x 6.5mm standard rack obround
 - 5.0mm hole + FH-M5x10/12/15/20 PEM
 - 5.4mm clearance hole or S-M4-2 PEM nut
 - 6.0mm hole + FH-M6x10/12/15/20 PEM
 - 6.4mm for M5 PEM nut S-M5-2ZI

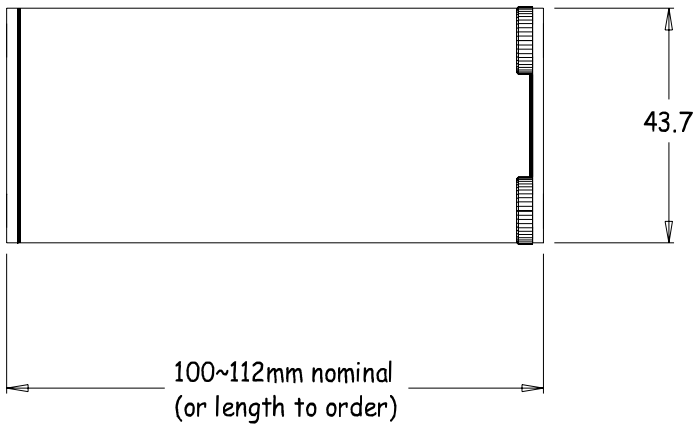

M5 PEM Self-Clinching option shown here.

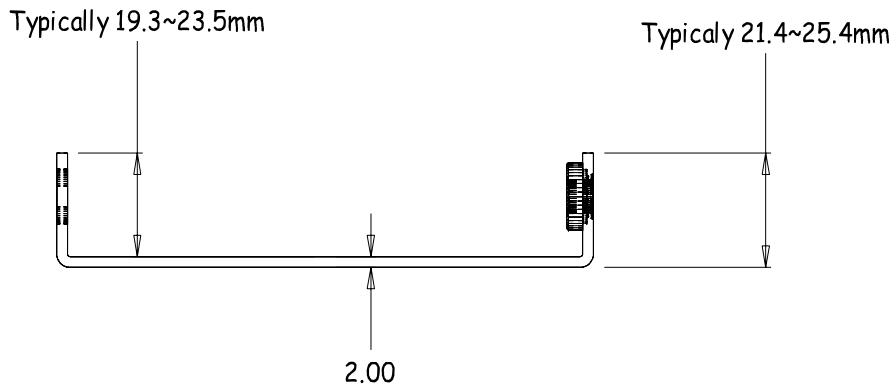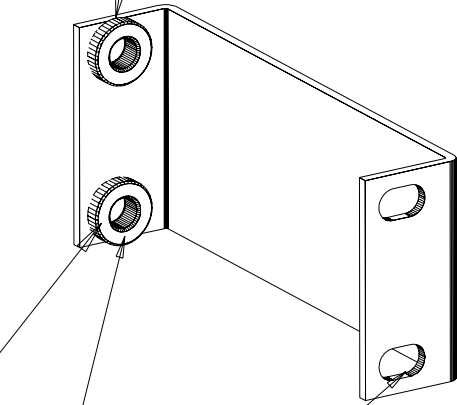

10.5 x 6.5mm Rack Fixing holes and/or M5 or M6 PEM optional self clinching nuts or studs etc. fixed on rear.

MATERIAL	Bright Steel
	2mm thick
ALLOY	Cold Rolled
EST. AREA	265 mm
EST. WEIGHT	12.x kg
EST. PERIPHERY	EXT: xx mm
	TOT: xx mm
TOLERANCE	0.00mm ±0.1mm
	00.0mm ±0.25mm
	0000mm ±0.5mm
	0-600mm ±0.1mm
	> 600mm ±0.5mm
BS1474:1987	APPLIES UNLESS OTHERWISE SPECIFIED
JOB No.	2902

CASA Modular Systems	CUSTOMER : CASA Modular Systems Ltd			SIZE	DRAWING Reference No.	ISSUE
	DESCRIPTION : Rack RECESS ~ EXTENSION Bracket - 1 Unit			A3	RBE-1Ux100	A
P.O. BOX 38-828, WELLINGTON, NEW ZEALAND		DRAWN : AWD	DATE : 07/09/09	APPROVED : ?	DWG. SCALE : 1:1	COPYRIGHT : CASA Modular Systems 1996 ALL RIGHTS RESERVED
TELEPHONE : (64-4) 9393 777						
FACSIMILE : (64-4) 9393 778						