CASA Coaxial Patch Panel Part Number = PP-1U-20W22BNC-AL3....

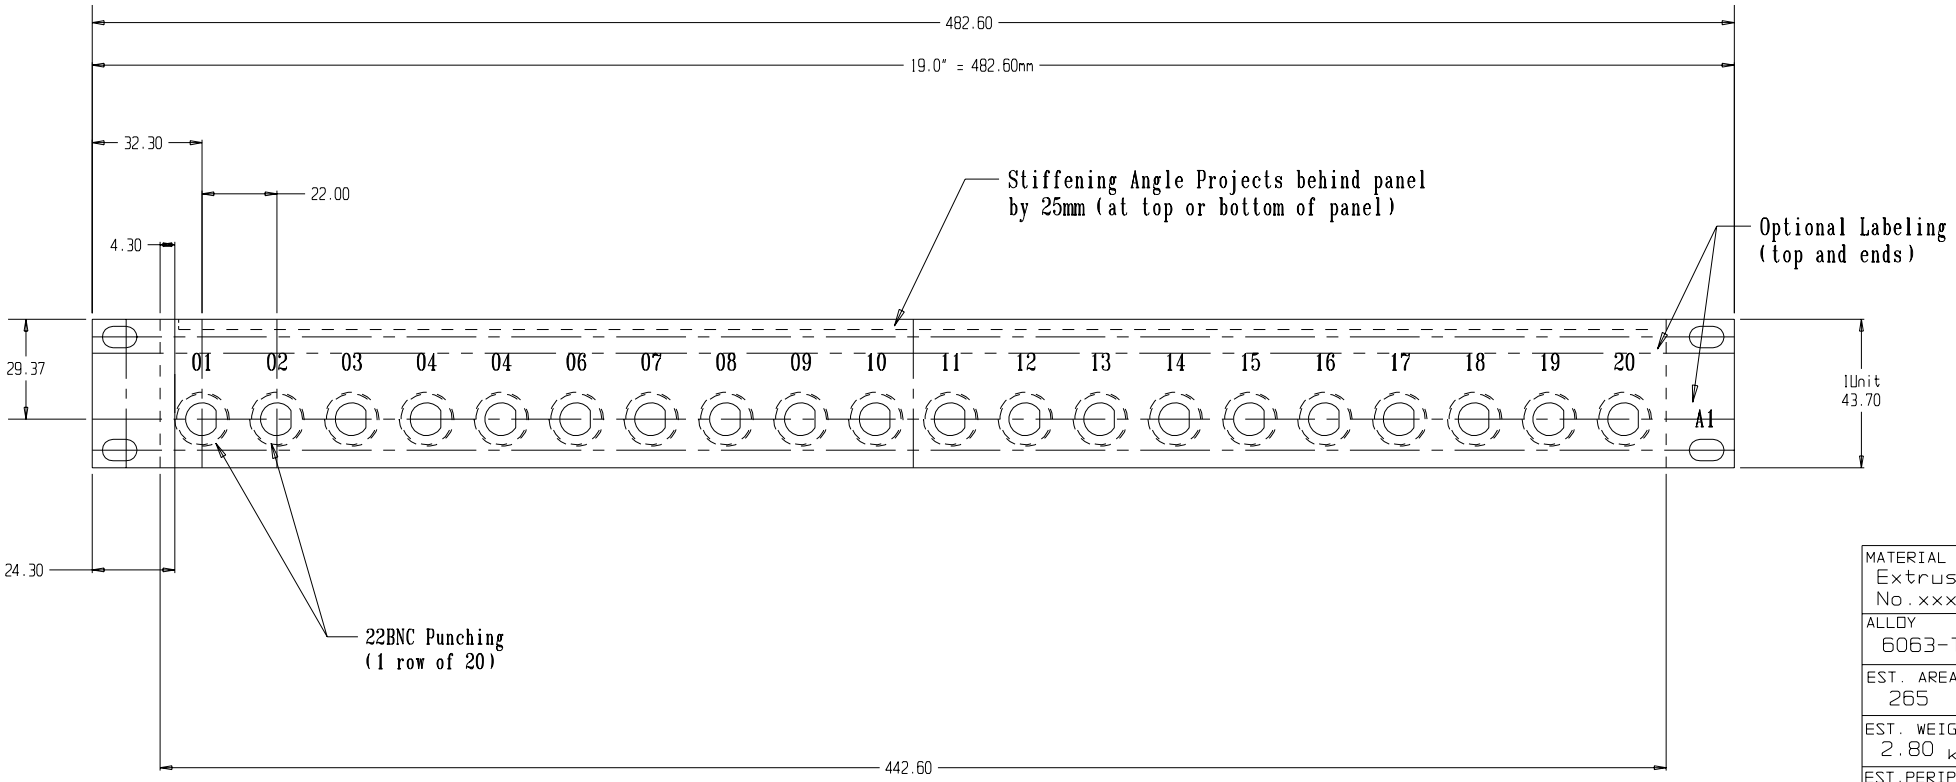

NOTE - Connector options include the following
22BNC-50-0-x
22BNC-75-0-x
24BNC-50-x-x
24BNC-75-x-x
34BNC-50-0-x
34BNC-75-0-x
etc.

Drawing Reference = PP-20WAY.PRT (24/04/96)

MATERIAL	Extrusion No.xxxx
ALLOY	6063-T5
EST. AREA	265 mm
EST. WEIGHT	2.80 kg/m
EST.PERIPHERY	EXT: 354 mm TOT: 354 mm
TOLERANCE	0.00mm ±0.1mm 00.0mm ±0.25mm 0000mm ±0.5mm 0-600mm ±0.1mm > 600mm ±0.5mm BS1474:1987 APPLIES UNLESS OTHERWISE SPECIFIED
JOB No.	XXXX

CASA Modular Systems
P.O. BOX 38-828, WELLINGTON, NEW ZEALAND
TELEPHONE : (64-4) 5687 277
FACSIMILE : (64-4) 5685 161

CUSTOMER : CASA Modular Systems				SIZE	DRAWING Reference No.	ISSUE
DESCRIPTION : Patch panel 1U for 20 x 24/34BNC				A4	PP-20WAY	A
DRAWN : A.W.D	DATE : 06/06/00	APPROVED : ?	DWG. SCALE : 1 : 1			

© COPYRIGHT : CASA Modular Systems
ALL RIGHTS RESERVED