

Stepping Motor



<http://www.casa.co.nz>

Edition: 20/09/2011

Type: BH13-HDR



General Data

Brand: ? (?)

Type #: BH13-HDR

OEM #: BH13-HDR

Frame: NEMA 23 Body. Foot mounted

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 1.2 Amp?

Volts: 6 Vdc ?

Torque: ___ Nm @ ___A (___ oz.in.)

Resistance: 4.7 Ohms / phase (nominal)

Inductance: 5.7 mH / phase (nominal)

Connector: None fitted

Wires: 6 wire (200mm nominal)

Shaft: 7.02mm dia. x 21mm long

Shaft-Detail: Plain


Size: 56 x 56 x 73mm (nominal)

Wires: 6 wire (450mm nominal)

Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.48kg

Condition: Used (refurbished). Optional timing pulley may be available. Noisy in operation.

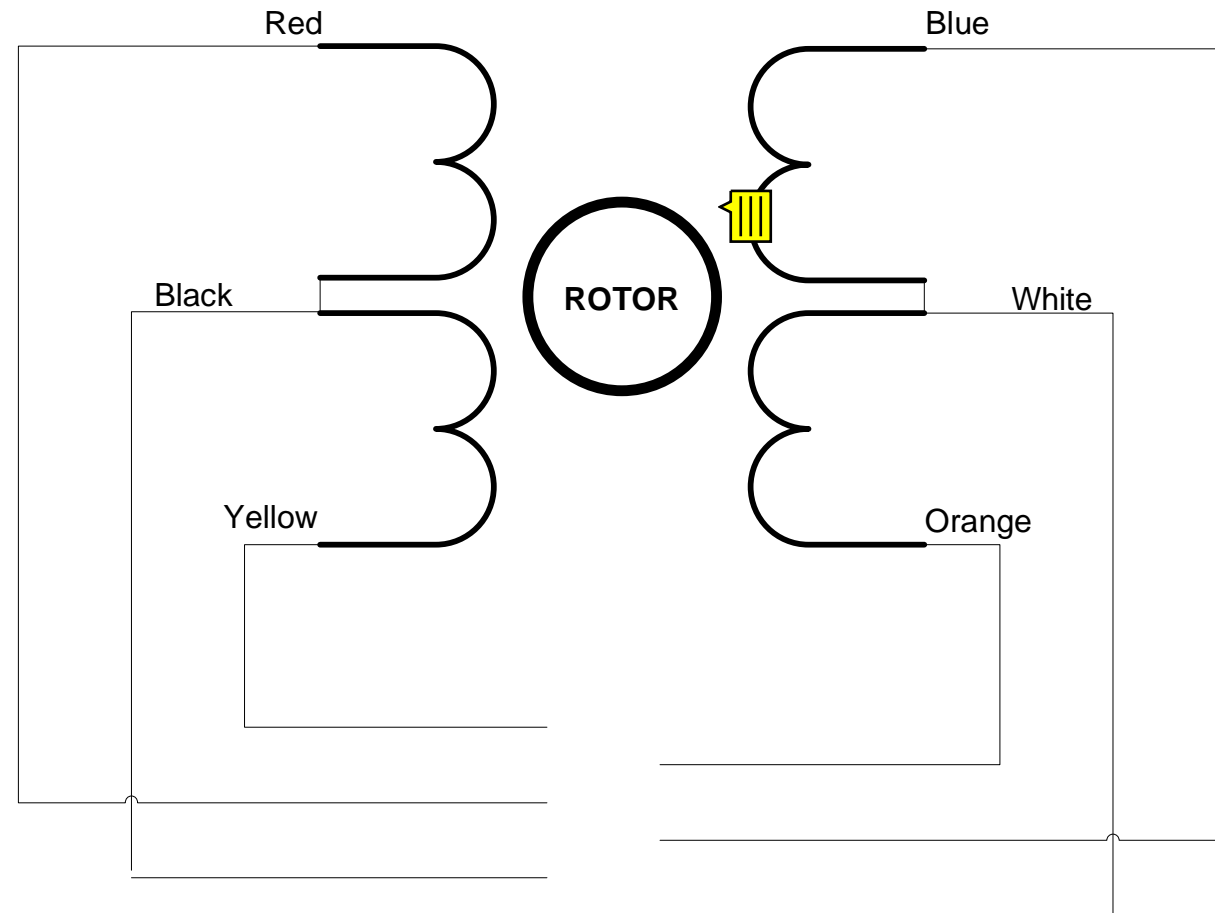

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.