

CASA Modular Systems

Print Date: 19/05/21

Phone: 64-4-9393 777

RCA Solid State

66 Fitzherbert Street,
Petone, 5012, Wellington

eMail: sales@casa.co.nz



eCommerce: www.casamodularsystems.com

<https://www.casa.co.nz>

BarTender: 100x30L-CASA-Address_2x21R3.btw

CROSS REFERENCE DIRECTORY

Bipolar Power Devices • Power MOSFETs • Linear ICs
CMOS Logic ICs • CMOS Microprocessors • CMOS Memories
CMOS I/Os • Ultra-Fast-Recovery Rectifiers

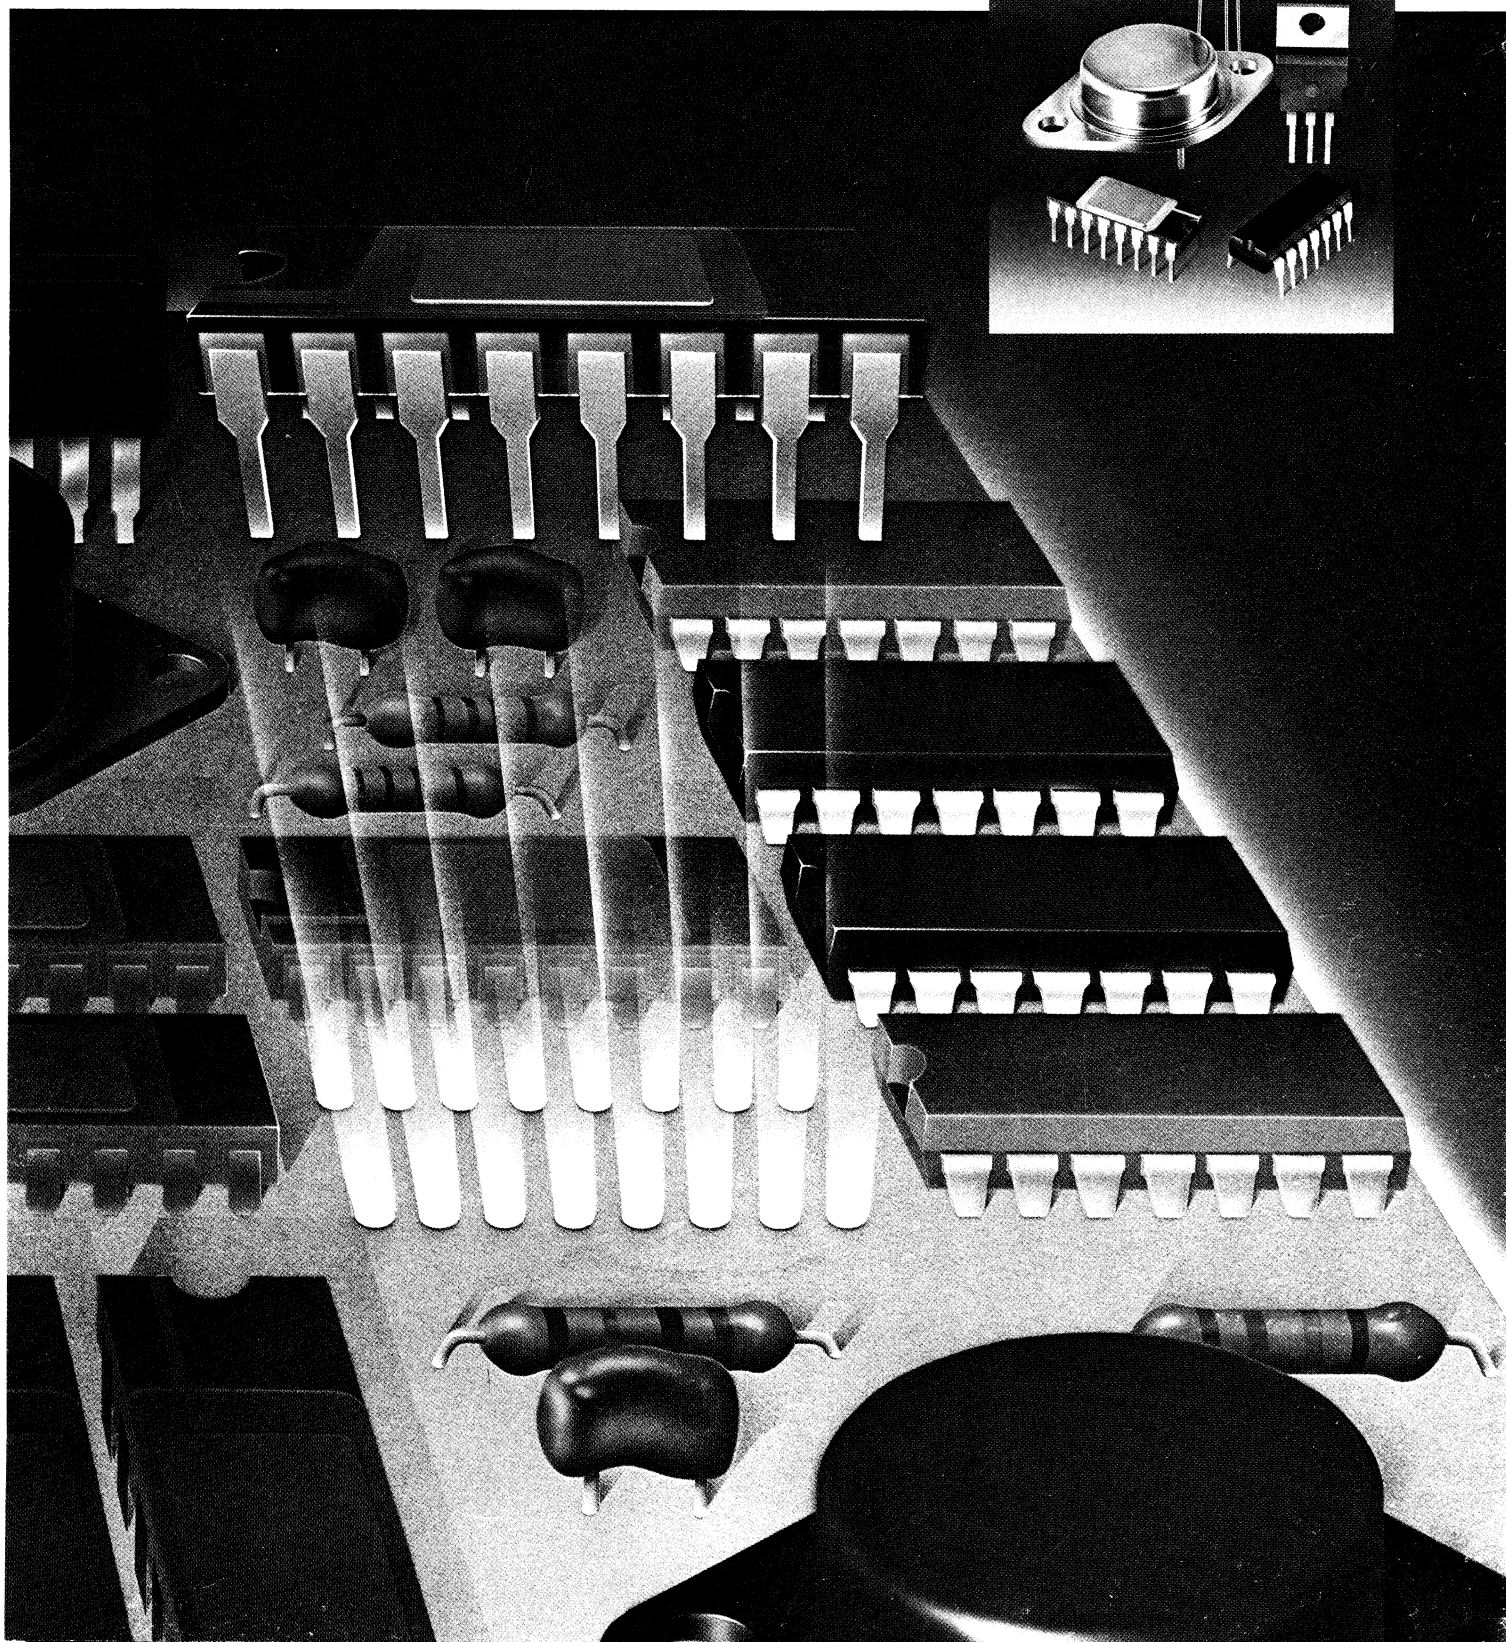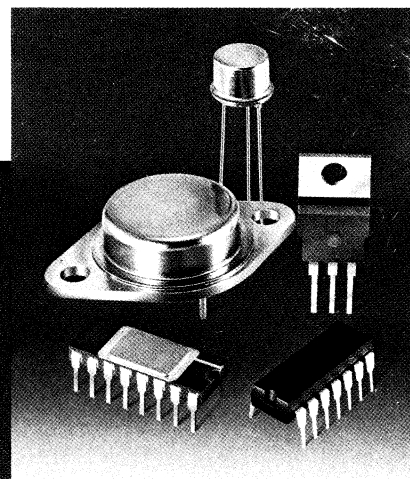



CROSS-REFERENCE DIRECTORY

This directory provides a quick reference to a wide variety of industry solid-state devices that can be replaced by RCA types. Included in this alphanumeric listing are linear and digital integrated circuits and discrete power devices as follows:

INTEGRATED CIRCUITS:

CMOS Microprocessors
CMOS Memories
CMOS Peripherals
CMOS Logic
Linear

DISCRETE DEVICES

Power Transistors
Power MOS/FETs
SCRs
Triacs
Ultra-Fast Recovery Rectifiers

The RCA types listed as replacements are electrically and mechanically equivalent to the corresponding industry types and can be used as direct replacements in most applications. The recommendations are based on the electrical and mechanical data published by various solid-state device manufacturers. Before substituting any replacement type in a particular application, the user should review the operating conditions of the particular application with the specifications of the type he is planning to use as the substitute type.

Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents of other right of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.

When incorporating RCA Solid State Devices in equipment, it is recommended that the designer refer to "Operating Considerations for RCA Solid State Devices", Form No. 1CE-402 available from RCA Solid State Division, Box 3200, Somerville, NJ 08876.

Copyright © 1983 by RCA Corporation
(All rights reserved under
Pan-American Copyright Convention)

Trademark(s) © Registered
Marca(s) Registrada(s)

Form No. CRG-100B
Printed in USA/11-83

Industry Type	RCA Replacement Type
2N656	2N2102
2N697	2N697
2N699	2N2102
2N1132	2N4037
2N1132A	2N4037
2N1565	40408
2N1565A	40408
2N1573	40409
2N1574	40409
2N1613	2N1613
2N1714	2N1480
2N1889	2N2102
2N1893	2N1893
2N1974	40408
2N1975	40408
2N1984	40408
2N1985	40408
2N1986	2N3053
2N1987	2N697
2N1990	2N3440
2N2034	2N5784
2N2102	2N2102
2N2193	2N1613
2N2194	2N2102
2N2195	2N697
2N2195A	2N697
2N2217	2N697
2N2218	2N697
2N2243	2N1893
2N2243A	2N1893
2N2270	2N2270
2N2297	2N1613
2N2297S	2N1613
2N2303	40314
2N2405	2N2405
2N2410	2N3053
2N2537	2N2270
2N2800	40406
2N2846	2N697
2N2848	2N697
2N2863	2N5321
2N2864	2N3053
2N2868	2N3053
2N2958	2N697
2N3020	2N1893
2N3024	2N4904
2N3025	2N4905
2N3026	2N4905
2N3036	2N5320
2N3053	2N3053
2N3054	2N3054
2N3055	2N3055
2N3108	2N2102
2N3110	2N3053
2N3114	2N3440
2N3122	2N5321
2N3133	2N4036
2N3134	2N4037
2N3171	2N6254
2N3172	2N6246
2N3173	2N6247
2N3174	2N6248
2N3183	2N6246
2N3184	2N6246
2N3185	2N6247

Industry Type	RCA Replacement Type
2N3195	2N6246
2N3196	2N6248
2N3196	2N6246
2N3197	2N6247
2N3198	2N6248
2N3202	2N5783
2N3203	2N5781
2N3208	2N5783
2N3224	2N5415
2N3225	2N5415
2N3226	2N6253
2N3233	2N3442
2N3234	2N3055
2N3235	2N3055
2N3236	2N6254
2N3237	2N5302
2N3238	2N5882
2N3239	2N5882
2N3240	2N5882
2N3244	2N5323
2N3245	2N5323
2N3292	2N697
2N3418	2N5320
2N3439	2N3439
2N3440	2N3440
2N3441	2N3441
2N3442	2N3442
2N3444	2N5321
2N3445	2N6471
2N3446	2N6472
2N3447	2N6471
2N3448	2N6472
2N3583	2N3583
2N3584	2N3584
2N3585	2N3585
2N3665	2N1893
2N3712	2N3440
2N3713	2N3715
2N3714	2N3716
2N3715	2N3715
2N3716	2N3716
2N3719	2N5323
2N3720	2N5322
2N3738	2N3584
2N3739	2N3585
2N3740	2N5955
2N3741	2N5954
2N3742	2N3439
2N3743	2N5416
2N3766	2N3879
2N3767	2N6372
2N3771	2N3771
2N3772	2N3772
2N3773	2N3773
2N3774	2N5783
2N3775	2N5781
2N3778	2N5783
2N3779	2N5781
2N3782	2N5783
2N3788	2N5840
2N3789	2N3791
2N3790	2N3792
2N3791	2N3791
2N3792	2N3792
2N3795	2N5415

Industry Type	RCA Replacement Type
2N3863	2N3055
2N3864	2N3442
2N3865	2N6262
2N3879	2N3879
2N3902	2N6308
2N3945	2N2102
2N4000	2N5320
2N4030	2N4036
2N4036	2N4036
2N4037	2N4037
2N4070	2N6306
2N4071	2N6306
2N4111	2N4914
2N4113	2N4915
2N4130	2N3055
2N4231	2N4231A
2N4231A	2N4231A
2N4232	2N4232A
2N4232A	2N4232A
2N4233	2N4233A
2N4233A	2N4233A
2N4234	2N5783
2N4235	2N5782
2N4236	2N5781
2N4237	2N5786
2N4238	2N5785
2N4239	2N5784
2N4240	2N4240
2N4347	2N4347
2N4387	2N5956
2N4388	2N5955
2N4404	2N1893
2N4405	2N2405
2N4438	2N3439
2N4890	2N4037
2N4898	2N4898
2N4899	2N4899
2N4900	2N4900
2N4907	2N6246
2N4908	2N6246
2N4909	2N6247
2N4910	2N6260
2N4911	2N3054
2N4912	2N6261
2N4926	2N3440
2N4927	2N3440
2N4928	2N5415
2N4929	2N5415
2N4930	2N5415
2N4931	2N5416
2N5038	2N5038
2N5039	2N5039
2N5050	2N5050
2N5051	2N5051
2N5052	2N5052
2N5058	2N3439
2N5059	2N3440
2N5091	2N5416
2N5092	2N3439
2N5110	2N5783
2N5157	2N5840
2N5241	2N6513
2N5264	2N6510
2N5279	2N3439
2N5280	2N4036

Industry Type	RCA Replacement Type
2N5281	2N5415
2N5282	2N5416
2N5301	2N5301
2N5302	2N5302
2N5303	2N5303
2N5305	BDY29
2N5344	2N6211
2N5345	2N6212
2N5427	2N6372
2N5429	2N6465
2N5466	2N6671
2N5467	2N6671
2N5598	2N5202
2N5600	2N6500
2N5602	2N3879
2N5604	2N6500
2N5606	2N3879
2N5608	2N3879
2N5610	2N6500
2N5612	2N6500
2N5614	2N5039
2N5616	2N5038
2N5618	2N5038
2N5620	2N6496
2N5622	2N5039
2N5624	2N5038
2N5626	2N5038
2N5628	2N6496
2N5633	2N5633
2N5634	2N5634
2N5660	2N6077
2N5661	2N6079
2N5664	2N6077
2N5665	2N6079
2N5672	2N5672
2N5687	40412
2N5732	2N5671
2N5734	2N5671
2N5737	2N6246
2N5738	2N6248
2N5739	2N5878
2N5745	2N5745
2N5758	2N3442
2N5759	2N3442
2N5760	2N3442
2N5838	2N5838
2N5839	2N5839
2N5840	2N5840
2N5861	2N5321
2N5864	2N4036
2N5865	2N4036
2N5867	2N6246
2N5871	2N5871
2N5872	2N5872
2N5873	2N5873
2N5874	2N5874
2N5875	2N5875
2N5876	2N5876
2N5877	2N5877
2N5878	2N5778
2N5879	2N5879
2N5880	2N5880
2N5881	2N5881
2N5882	2N5882
2N5885	2N5885

Industry Type	RCA Replacement Type
2N5886	2N5886
2N5888	2N6247
2N5929	2N5671
2N5930	2N5672
2N5932	2N5671
2N5933	2N5672
2N5935	2N6032
2N5936	2N6033
2N5970	2N6472
2N5971	2N6472
2N5972	2N6472
2N5974	2N6489
2N5975	2N6490
2N5976	2N6491
2N5977	2N6486
2N5978	2N6487
2N5979	2N6488
2N5980	2N6489
2N5981	2N6490
2N5982	2N6491
2N5983	2N6486
2N5984	2N6487
2N5985	2N6488
2N5986	2N6489
2N5987	2N6490
2N5988	2N6491
2N5989	2N6486
2N5990	2N6487
2N5991	2N6488
2N6029	RCA9116E
2N6030	RCA9116D
2N6031	2N6609
2N6043	2N6043
2N6044	2N6044
2N6045	2N6045
2N6050	2N6050
2N6051	2N6051
2N6052	2N6052
2N6054	2N6650
2N6055	2N6055
2N6056	2N6056
2N6057	2N6057
2N6058	2N6058
2N6059	2N6059
2N6077	2N6077
2N6078	2N6078
2N6079	2N6079
2N6107	2N6107
2N6109	2N6109
2N6111	2N6111
2N6121	2N6121
2N6122	2N6122
2N6123	2N6123
2N6124	2N6124
2N6125	2N6125
2N6126	2N6126
2N6129	2N6129
2N6130	2N6130
2N6131	2N6131
2N6132	2N6132
2N6133	2N6133
2N6134	2N6134
2N6139	2N5569
2N6140	2N5570
2N6141	T4111M

Industry Type	RCA Replacement Type
2N6142	2N5569
2N6143	2N5570
2N6144	T4111M
2N6145	T4120B
2N6146	T4120D
2N6147	T4120M
2N6151	T2800B
2N6152	T2800D
2N6153	T2800M
2N6154	T2802B
2N6155	T2802D
2N6156	T2802M
2N6157	T6401B
2N6158	T6401D
2N6159	T6401M
2N6160	T6411B
2N6161	T6411D
2N6162	T6411M
2N6163	T6421B
2N6164	T6421D
2N6165	T6421M
2N6211	2N6211
2N6212	2N6212
2N6213	2N6213
2N6226	2N6248
2N6229	RCA9116E
2N6230	RCA9116D
2N6231	MJ15004
2N6233	2N3583
2N6234	2N3584
2N6235	2N3585
2N6246	2N6246
2N6247	2N6247
2N6248	2N6248
2N6249	2N6249
2N6250	2N6250
2N6251	2N6251
2N6253	2N6253
2N6257	2N3771
2N6262	2N6262
2N6270	2N5671
2N6271	2N5672
2N6282	2N6282
2N6283	2N6283
2N6284	2N6284
2N6285	2N6285
2N6286	2N6286
2N6287	2N6287
2N6288	2N6288
2N6290	2N6290
2N6292	2N6292
2N6302	RCA3773
2N6306	2N6306
2N6307	2N6307
2N6308	2N6308
2N6312	2N6312
2N6313	2N6313
2N6314	2N6314
2N6326	2N6326
2N6327	2N6327
2N6338	2N5672
2N6339	2N5672
2N6342	2N6342A
2N6343	2N6343A
2N6344	2N6344A

Industry Type	RCA Replacement Type
2N6346	2N6346A
2N6347	2N6347A
2N6348	2N6348A
2N6359	2N4348
2N6360	2N4348
2N6371	2N6371
2N6383	2N6383
2N6384	2N6384
2N6385	2N6385
2N6386	2N6386
2N6387	2N6387
2N6388	2N6388
2N6420	2N6420
2N6421	2N6421
2N6422	2N6422
2N6423	2N6423
2N6424	2N6211
2N6425	2N6212
2N6461	2N3439
2N6486	2N6486
2N6487	2N6487
2N6488	2N6488
2N6489	2N6489
2N6490	2N6490
2N6491	2N6491
2N6542	2N6542
2N6543	2N6673
2N6544	2N6544
2N6545	2N6545
2N6546	2N6546
2N6569	2N6569
2N6576	2N6576
2N6577	2N6577
2N6578	2N6578
2N6579	2N6675
2N6580	2N6675
2N6581	2N6675
2N6582	2N6677
2N6583	2N6678
2N6594	2N6594
2N6648	2N6648
2N6649	2N6649
2N6650	2N6650
2N6659	RFL1N08
2N6660	RFL1N12
2N6661	RFL1N12
2N6666	2N6666
2N6667	2N6667
2N6668	2N6668
2N6671	2N6671
2N6672	2N6672
2N6673	2N6673
2N6674	2N6674
2N6675	2N6675
2N6676	2N6676
2N6677	2N6677
2N6678	2N6678
2N6686	2N6686
2N6687	2N6687
2N6688	2N6688
2N6702	2N6702
2N6703	2N6703
2N6704	2N6704
2N6738	2N6738
2N6739	2N6739

Industry Type	RCA Replacement Type
2N6740	2N6740
2N6751	2N6751
2N6752	2N6752
2N6753	2N6753
2N6754	2N6754
2N6755	RFM12N08
2N6756	RFM15N12
2N6757	RFM10N15
2N6758	RFM12N20
2N6765	RFM15N15
2N6829	RFM12N10
2N6830	RFM12N08
2SA489	2N6107
2SA490	2N6109
2SA503	2N4314
2SA512	2N4314
2SA560	2N4314
2SA597	2N4037
2SA814	2N6476
2SA815	2N6475
2SB502A	2N5954
2SB503A	2N5955
2SB530	2N6248
2SB531	2N6247
2SB558	2N6248
2SB595	2N6475
2SB596	2N6107
2SC481	2N2102
2SC482	2N1613
2SC485	2N1893
2SC512	2N2102
2SC558	BUX17A
2SC560	2N2405
2SC779	2N3584
2SC782	2N3585
2SC782A	2N3585
2SC783	2N3583
2SC789	2N6292
2SC790	2N6290
2SC792	BUX16B
2SC1173	2N6288
2SC1195	BUX16
2SC1576	BUX16
2SD102	2N6261
2SD129	2N6372
2SD130	2N3054
2SD234	RCA3054
2SD235	RCA3054
2SD369	2N3055
2SD371	2N6254
2SD404C	2N6288
2SD424	2N6262
2SD425	2N3442
2SD427	2N4347
2SD428	2N4348
2SD523	2N6384
2SD524	2N6385
2SD526	2N6292
2SD552	BUX17A
6T06	T2700B
6T08	T4700B
6T16	T2700B
6T18	T4700B
6T26	T2700B
6T28	T4700B

Industry Type	RCA Replacement Type
6T36	T2700D
6T38	T4700D
6T46	T2700D
6T48	T4700D
10RC10AS24	2N3650
10RC20AS24	2N3650
10RC30AS24	2N3651
10RC40AS24	2N3652
10RC50AS24	S7410M
10RC60AS24	S7410M
16RC10A	2N683
16RC10AS24	2N3650
16RC20A	2N685
16RC20AS24	2N3651
16RC30A	2N687
16RC30AS24	2N3652
16RC40A	2N688
16RC40AS24	2N3653
16RC50A	2N689
16RC60A	2N690
16RC60AS24	S7410M
16RC540AS24	S7410M
73T2	40392
100T2	2N4347
104T2	2N6253
108T2	2N5039
109T2	2N6354
182T2A	BUX16
182T2B	BUX16
182T2C	BUX16
183T2A	BUX16
183T2B	BUX16
183T2C	BUX16
184T2A	BUX16
184T2B	BUX16
184T2C	BUX16
185T2A	BUX16A
185T2B	BUX16A
185T2C	BUX16A
6402	CDP6402
40216	S6493M
40250	40250
40251	40251
40525	T2300A
40526	T2300B
40527	T2300D
40528	T2302A
40529	T2302B
40530	T2302D
40553	S3700B
40554	S3700D
40555	S3700M
40575	T4700B
40576	T4700D
40594	RCA1A03
40595	RCA1A04
40654	S2600B
40655	S2600D
40660	T6401B
40661	T6401D
40662	T6411B
40663	T6411D
40668	T2800B
40669	T2800D
40670	T2800M

Industry Type	RCA Replacement Type
40671	T6401M
40672	T6411M
40688	T6420B
40689	T6420D
40690	T6420M
40691	T2301B
40692	T2301D
40715	T4706B
40716	T4706D
40722	T2806D
40727	T2706B
40728	T2706D
40735	S7410M
40749	S6200M
40750	S6200B
40751	S6200D
40752	S6200M
40753	S6210A
40754	S6210B
40755	S6210D
40756	S6210M
40757	S6220A
40758	S6220B
40759	S6220D
40760	S6220M
40766	T2301A
40795	T4101M
40796	T4111M
40797	T4100M
40798	T4110M
40799	T4121B
40800	T4121D
40801	T4121M
40802	T4120B
40803	T4120D
40804	T4120M
40805	T6421B
40806	T6421D
40807	T6421M
40833	S2600M
40867	S2800A
40868	S2800B
40869	S2800D
40871	RCA1C03
40872	RCA1C04
40900	T2850A
40901	T2850B
40902	T2850D
40980	RCA1C11
41014	T2500B
41015	T2500D
AD301AH	CA301AT,LM301AH
AD301AN	CA301AE,LM301AN
AD741CH	CA741CT,LM741CH
AD741CN	CA741CE,LM741CN
AD741H	CA741T,LM741H
AD2020	CA3162E
AM723HC	CA723CT,LM723CH
AM723HM	CA723T,LM723H
AM741HC	CA741CT,LM741CH
AM741HM	CA741T,LM741H
AM747HC	CA747CT
AM747HM	CA747T
AM748HC	CA748CT,LM748CH
AM1458H	CA1458T,LM1458CH

Industry Type	RCA Replacement Type
AM1558H	CA1558T,LM1558H
AMLM301AH	CA301AT,LM301AH
AMLM301H	CA301T,LM301AH
AMLM307H	CA307T,LM307H
AMLM311H	CA311T,LM311H
BC119	2N697
BC120	2N697
BC139	40406
BC140	2N5321
BC141	2N5320
BC142	40408
BC143	RCA1A04
BC144	RCA1A03
BC160	2N5323
BC161	2N5322
BC185	2N3053
BC286	2N2102
BC287	2N4036
BC300	2N1893
BC301	2N2102
BC302	2N2270
BC303	2N4314
BC310	2N1893
BC311	2N4314
BC323	2N5320
BC324	2N5320
BC340	2N3053
BC341	2N3053A
BC342	2N2102
BC343	2N4036
BC344	2N2405
BC345	2N4036
BC360	40319
BC361	2N4036
BC441	2N5320
BC460	2N5323
BC461	2N5322
BCW44	40408
BCW45	40362
BCW79-16	2N4037
BCW80-16	2N4037
BCY40	2N4037
BCY54	2N4036
BD65	BDX83A
BD65A	BDX83B
BD115	BF258
BD116	2N3055
BD141	2N4347
BD144	BUX18C
BD148	BDY71
BD149	BDY71
BD160	2N6510
BD162	40250
BD163	2N6260
BD166	BD240
BD167	BD239A
BD168	BD240A
BD169	BD239B
BD170	BD240B
BD175	BD239
BD176	BD240
BD177	BD239A
BD178	BD240A
BD179	BD239B
BD180	BD240B

Industry Type	RCA Replacement Type
BD185	BD239
BD186	BD240
BD187	BD239
BD188	BD240
BD189	BD239A
BD190	BD240A
BD191	2N3054
BD192	2N6260
BD195	BD243
BD196	BD244
BD197	BD243A
BD198	BD244A
BD199	BD243B
BD200	BD244B
BD201	BD243
BD202	BD244
BD203	BD243A
BD204	BD244A
BD205	2N6486
BD206	2N6489
BD207	2N6487
BD208	2N6490
BD213-45	2N6486
BD213-60	2N6487
BD213-80	2N6488
BD214-45	2N6489
BD214-60	2N6490
BD214-80	2N6491
BD215	2N3584
BD216	2N3585
BD244A	BD244A
BD244B	BD244B
BD244C	BD244C
BD245	2N6486
BD245A	2N6487
BD245B	2N6488
BD246	2N6489
BD246A	2N6490
BD246B	2N6491
BD253	BUX31
BD253A	BUX31
BD253B	BUX31
BD253C	BUX31A
BD260	2N3584
BD261	2N3584
BD264	2N6667
BD264A	2N6668
BD264B	BDX34C
BD265	2N6387
BD265A	2N6388
BD265B	BDX33C
BD266	BDX34A
BD266A	BDX34C
BD266A	BDX34B
BD267	BDX33A
BD267A	BDX33B
BD267B	BDX33C
BD268	BDX34A
BD268A	BDX34B
BD269	BDX33A
BD269A	BDX33B
BD271	BD241
BD272	BD242
BD273	BD241A
BD274	BD242A

Industry Type	RCA Replacement Type
BD275	BD241B
BD276	BD242B
BD301	BD243
BD302	BD244
BD303	BD243A
BD304	BD244A
BD311	2N6471
BD312	2N6246
BD313	2N6472
BD314	2N6247
BD315	2N6472
BD316	2N6247
BD317	2N6472
BD318	2N6248
BD342	2N6569
BD343	2N6594
BD350A	BDX18
BD351A	2N3055
BD401	BUW64A
BD403	BUW64B
BD539	BD241
BD539A	BD241A
BD539B	BD241B
BD539C	BD241C
BD540	BD242
BD540A	BD242A
BD540B	BD242B
BD540C	BD242C
BD543	2N6486
BD543A	2N6487
BD543B	2N6488
BD544	2N6489
BD544A	2N6490
BD544B	2N6491
BD545	2N6486
BD545A	2N6487
BD545B	2N6488
BD546	2N6489
BD546A	2N6490
BD546B	2N6491
BD566	2N6667
BD566A	2N6668
BD567	2N6387
BD567A	2N6388
BD575	BD241
BD576	BD242
BD577	BD241A
BD578	BD242A
BD579	BD241B
BD580	BD242B
BD581	BD241C
BD582	BD242C
BD585	BD241
BD586	BD242
BD587	BD241A
BD588	BD242A
BD589	BD241B
BD590	BD242B
BD591	BD241C
BD592	BD242C
BD595	BD243
BD596	BD244
BD597	BD243A
BD598	BD244A
BD599	BD243B

Industry Type	RCA Replacement Type
BD600	BD244B
BD601	BD243C
BD602	BD244C
BD605	2N6486
BD606	2N6489
BD607	2N6487
BD608	2N6490
BD609	2N6488
BD610	2N6491
BD633	RCA1C10
BD634	RCA1C11
BD635	RCA1C03
BD636	RCA1C04
BD637	RCA1C03
BD638	RCA1C04
BD644	BDX34
BD646	BDX34A
BD648	BDX34B
BD661	2N6486
BD661K	BD243
BD662	2N6489
BD662K	BD244
BD663B	2N6486
BD664	2N6489
BD675	BDX33
BD676	BDX34
BD677	BDX33A
BD678	BDX34A
BD679	BDX33B
BD680	BDX34B
BD695A	BDX33
BD696A	BDX34
BD697	BDX33A
BD697A	BDX33A
BD698	BDX34A
BD698A	BDX34A
BD699	BDX33B
BD699A	BDX33B
BD700	BDX34B
BD700A	BDX34B
BD701	BDX33C
BD702	BDX34C
BD705	2N6486
BD706	2N6489
BD707	2N6487
BD708	2N6490
BD709	2N6488
BD710	2N6491
BD795	BD243
BD796	BD244
BD797	BD243A
BD798	BD244A
BD799	BD243B
BD800	BD244B
BD801	BD243C
BD802	BD244C
BD805	2N6486
BD806	2N6489
BD807	2N6487
BD808	2N6490
BD809	2N6488
BD810	2N6491
BD895	BD895
BD895A	BD895A
BD896	BD896

Industry Type	RCA Replacement Type
BD896A	BD896A
BD897	BD897
BD897A	BD897A
BD898	BD898
BD898A	BD898A
BD899	BD899
BD899A	BD899A
BD900	BD900
BD900A	BD900A
BD901	BD901
BD902	BD902
BD905	2N6486
BD906	2N6489
BD907	2N6487
BD908	2N6490
BD909	2N6488
BD910	2N6491
BD933	BD239
BD934	BD240
BD935	BD239A
BD936	BD240A
BD937	BD239B
BD938	BD240B
BD939	BD239C
BD940	BD240C
BD941	2N6474
BD942	2N6476
BD943	2N6288
BD944	2N6111
BD945	2N6288
BD946	2N6111
BD947	2N6290
BD948	2N6109
BD949	BD241A
BD950	BD242A
BD951	BD241B
BD952	BD242B
BD953	BD241C
BD954	BD242C
BD955	2N6474
BD956	2N6476
BDT62	BDX34A
BDT62A	BDX34B
BDT62B	BDX34C
BDT63	BDX33A
BDT63A	BDX33B
BDT63B	BDX33C
BDT63C	BDX33D
BDT91	2N6487
BDT92	2N6490
BDT93	2N6488
BDT94	2N6491
BDW21	2N6569
BDW21A	2N3055
BDW22	2N6469
BDW22A	2N6246
BDW22B	2N6247
BDW22C	2N6248
BDW23	BDX33
BDW23A	BDX33A
BDW23B	BDX33B
BDW23C	BDX33C
BDW25-4	2N6466
BDW25-6	2N6466
BDW25-10	2N6466

Industry Type	RCA Replacement Type
BDW51	2N6470
BDW51A	2N6471
BDW51B	2N6472
BDW52	2N6469
BDW52A	2N6264
BDW52B	2N6247
BDW52C	2N6248
BDW73	BDX33
BDW74	BDX34
BDW93	BDX33
BDW93A	BDX33A
BDW93B	BDX33B
BDW93C	BDX33C
BDW94	BDX34
BDW94A	BDX34A
BDW94B	BDX34B
BDW94C	BDX34C
BDX14	2N5954
BDX16	BUX66
BDX27	2N3879
BDX28	2N3879
BDX30	2N6500
BDX51B	2N6472
BDX54	BDX34
BDX54A	BDX34A
BDX54B	BDX34B
BDX54C	BDX34C
BDX60	2N6254
BDX61	2N3055
BDX62	2N6649
BDX62A	2N6650
BDX63	2N6384
BDX63A	2N6385
BDX64	BDX84A
BDX64A	BDX84B
BDX64B	BDX84C
BDX65B	BDX83C
BDX66	2N6285
BDX66A	2N6286
BDX66B	2N6287
BDX67	2N6282
BDX67A	2N6283
BDX67B	2N6284
BDX77	BD243B
BDX78	BD244B
BDX85	2N6383
BDX85B	2N6056
BDX87	BDX83
BDX87A	BDX83A
BDX87B	BDX83B
BDX87C	BDX83C
BDX91	2N4914
BDX92	2N4905
BDX93	2N4915
BDX94	2N4906
BDY10	2N6253
BDY11	2N3055
BDY12	BUX16
BDY13	BUX16
BDY15	BUX16
BDY17	BUX16
BDY20	BUX16
BDY23	2N4914
BDY24	2N4915
BDY25A	BUX16

Industry Type	RCA Replacement Type
BDY25B	BUX16
BDY25C	BUX16
BDY26A	BUX16
BDY26B	BUX16
BDY26C	BUX16
BDY27A	BUX16
BDY27B	BUX16
BDY27C	BUX16
BDY28A	BUX16A
BDY28B	BUX16A
BDY28C	BUX16A
BDY34	BD241
BDY38	2N6253
BDY39	2N3055
BDY42	BUX18A
BDY43	BUX18B
BDY44	BUX18C
BDY45	BUX17A
BDY46	BUX27B
BDY55	BDY55
BDY55	2N5039
BDY56	2N5038
BDY57	BDY57A
BDY58	BDY58R
BDY73	2N3055
BDY74	2N4347
BDY76	2N3772
BDY77	2N3773
BDY78	2N6373
BDY79	2N3583
BDY80A	2N5296
BDY81A	2N5298
BDY82A	2N6111
BDY83A	2N6109
BDY91	2N5038
BDY92	2N5039
BDY93	BU126
BDY94	BU126
BDY95	BU126
BDY96	2N6513
BDY97	2N6512
BDY98	2N6511
BDY99	2N6511
BF111	2N3440
BF137	BF257
BF157	BF257
BF174	BF257
BF178	40412
BF179	BF257
BF179A	BF257
BF179B	BF258
BF179C	BF258
BF305	BF257
BF322	40317
BF323	40319
BF336	BF258
BF337	BP258
BF338	BF258
BF355	2N3440
BF390	BF259
BFR19	2N1613
BFR21	2N1893
BFR22	2N2102
BFR23	2N4036
BFR24	2N4037

Industry Type	RCA Replacement Type
BFR56	2N5321
BFR57	BF257
BFR58	BF258
BFR59	BF259
BFR77	2N1893
BFR78	2N2405
BFS91A	2N4036
BFS92	2N4036
BFS93	2N4314
BFS94	2N4037
BFS95	2N4037
BFT32	2N2405
BFT33	40409
BFT34	2N2405
BFT35	2N4314
BFT36	40410
BFT39	40409
BFT44	BF259
BFT45	BF258
BFT60	2N4037
BFT61	2N4037
BFW24	2N2102
BFW26	2N697
BFW33	2N1893
BFW44	BFT19
BFW45	BF257
BFX17	2N3053
BFX29	2N4036
BFX30	2N4036
BFX39	2N4036
BFX69	2N697
BFX69A	2N1613
BFX74	2N4037
BFX74A	2N4314
BFX85	2N2405
BFX87	2N4036
BFX88	2N4037
BFX91	BFT28B
BFX98	BF257
BFY17	40317
BFY33	2N697
BFY34	2N697
BFY43	BF257
BFY44	2N2102
BFY45	40408
BFY50	2N697
BFY51	2N697
BFY52	2N3053
BFY55	2N697
BFY56	2N2102
BFY57	BF257
BFY67	2N3053
BFY67A	2N1613
BFY70	2N3053
BFY94	2N3053
BRT0340	T2700D
BRT0405	T4700B
BRY41-100	2N5754
BRY41-200	2N5755
BRY41-300	2N5756
BRY41-400	2N5757
BRY41-500	2N5757
BRY45-100	2N5754
BRY45-200	2N5755
BRY45-300	2N5756

Industry Type	RCA Replacement Type
BRY45-400	2N5757
BRY45-500	2N5757
BSS15	2N5320
BSS16	2N5321
BSS17	2N5322
BSS18	2N5323
BSS30	2N2102
BSS32	2N2405
BSS45	2N5320
BSS46	2N5322
BSS48	2N3440
BSS49	2N3439
BSV15	2N4037
BSV15-6	2N4037
BSV15-10	2N4037
BSV16	2N4314
BSV16-6	2N4314
BSV17	2N5322
BSV69	2N5321
BSV77	2N5321
BSV84	2N1893
BSW23	2N4037
BSW39	2N1893
BSX22	2N5321
BSX23	2N5320
BSX40	2N4037
BSX45	2N3053
BSX46	2N2102
BSX47	2N1893
BSX59	2N5321
BSX60	2N5321
BSX61	2N5321
BSX72	2N3053
BSX95	2N1613
BSY25	2N697
BSY44	2N2102
BSY45	2N1893
BSY46	2N2102
BSY53	2N697
BSY55	2N1893
BSY68	2N2405
BSY81	2N697
BSY83	2N697
BSY85	2N1893
BSY87	2N2102
BSY91	2N697
BT102-300R	S2800C
BT102-500R	S2800E
BT137-500	T2800E
BT137-600	T2800M
BT138-500	2N6348A
BT138-600	2N6348A
BT139-500	MAC15A8
BT139-600	MAC15A8
BTR0205	T2700B
BTR0210	T2700B
BTR0220	T2700B
BTR0230	T2700D
BTR0240	T2700D
BTR0305	T2700B
BTR0310	T2700B
BTR0320	T2700B
BTR0330	T2700D
BTR0410	T4700B
BTR0420	T4700B

Industry Type	RCA Replacement Type
BTR0430	T4700D
BTR0440	T4700D
BTS0305	2N5567
BTS0310	2N5567
BTS0320	2N5567
BTS0330	2N5568
BTS0340	2N5568
BTS0350	T4101M
BTS0360	T4101M
BTS0405	2N5567
BTS0410	2N5567
BTS0420	2N5567
BTS0430	2N5568
BTS0440	2N5568
BTS0450	T4101M
BTS0460	T4101M
BTS0505	2N5571
BTS0510	2N5571
BTS0520	2N5571
BTS0530	2N5572
BTS0540	2N5572
BTS0550	T4100M
BTS0560	T4100M
BTS0605	2N5441
BTS0610	2N5441
BTS0620	2N5441
BTS0630	2N5442
BTS0640	2N5442
BTS0650	2N5443
BTS0660	2N5443
BTU0305	2N5569
BTU0310	2N5569
BTU0320	2N5569
BTU0330	2N5570
BTU0340	2N5570
BTU0350	T4111M
BTU0360	T4111M
BTU0405	2N5569
BTU0410	2N5569
BTU0420	2N5569
BTU0430	2N5570
BTU0440	2N5570
BTU0450	T4111M
BTU0460	T4111M
BTU0505	2N5573
BTU0510	2N5573
BTU0520	2N5573
BTU0530	2N5574
BTU0540	2N5574
BTU0550	T4110M
BTU0560	T4110M
BTU0605	T6411B
BTU0610	T6411B
BTU0620	T6411B
BTU0630	T6411D
BTU0640	T6411D
BTU0650	T6411M
BTU0660	T6411M
BTU0405	T4121B
BTU0410	T4121B
BTU0420	T4121B
BTU0430	T4121D
BTU0440	T4121D
BTU0450	T4121M
BTU0460	T4121M

Industry Type	RCA Replacement Type
BTW10-100	T2700B
BTW10-200	T2700B
BTW10-300	T2700D
BTW10-400	T2700D
BTW11-100	T2700B
BTW11-200	T2700B
BTW11-300	T2700D
BTW11-400	T2700D
BTW12-100	2N5567
BTW12-200	2N5567
BTW12-300	2N5568
BTW12-400	2N5568
BTW12-500	T4101M
BTW13-100	2N5569
BTW13-200	2N5569
BTW13-300	2N5570
BTW13-400	2N5570
BTW13-500	T4111M
BTW14-100	T4700B
BTW14-200	T4700B
BTW14-300	T4700D
BTW14-400	T4700D
BTW15-100	2N5567
BTW15-200	2N5567
BTW15-300	2N5568
BTW15-400	2N5568
BTW15-500	T4101M
BTW16-100	2N5569
BTW16-200	2N5569
BTW16-300	2N5570
BTW16-400	2N5570
BTW16-500	T4111M
BTW18-100	2N5571
BTW18-200	2N5571
BTW18-300	2N5572
BTW18-400	2N5572
BTW18-500	T4101M
BTW19-100	2N5571
BTW19-200	2N5571
BTW19-300	2N5572
BTW19-400	2N5572
BTW19-500	T4101M
BTW20-100	T6411B
BTW20-200	T6411B
BTW20-300	T6411D
BTW20-400	T6411D
BTW20-500	T6411M
BTW30-300	2N3657
BTW30-400	2N3658
BTW31-300	2N3657
BTW31-400	2N3658
BTW31-500	S7412M
BTW31-600	S7412M
BTX31-100	S7310B
BTX31-200	S7310B
BTX31-400	S7310D
BTX31-500	S7310M
BTX31-600	S7310M
BTX32-100	S7310B
BTX32-400	S7310D
BTX32-500	S7310M
BTX32-600	S7310M
BTX33-100	S6210A
BTX33-200	S6210B
BTX33-400	S6210D

Industry Type	RCA Replacement Type
BTX33-500	S6210M
BTX70-100	S6210A
BTX70-200	S6210B
BTX70-400	S6210D
BTX70-500	S6210M
BTX70-600	S6210M
BTX71-100	S7310B
BTX71-200	S7310B
BTX71-400	S7310D
BTX71-500	S7310M
BTX71-600	S7310M
BTX72-100	S7310M
BTX72-200	S7310M
BTX72-400	S7310M
BTX72-500	S7310M
BTX72-600	S7310M
BTX73-110	2N683
BTX73-200	2N685
BTX73-400	2N688
BTX73-500	2N690
BTX73-500	2N689
BTX74-100	S6210A
BTX74-200	S6210B
BTX74-400	S6210D
BTX74-500	S6210M
BTX74-600	S6210M
BTX94-400	T6411D
BTX94-500	T6411M
BTX94-600	T6411M
BTX0505	T4120B
BTX0510	T4120B
BTX0520	T4120B
BTX0530	T4120D
BTX0540	T4120D
BTX0550	T4120M
BTX0560	T4120M
BTX0600	T6421M
BTX0605	T6421B
BTX0610	T6421B
BTX0620	T6421B
BTX0630	T6421D
BTX0640	T6421D
BTX0650	T6421M
BTX3600	S6210M
BU102	BUX18B
BU104	2N6671
BU104DP	2N6738
BU109	2N6671
BU109DP	2N6738
BU111	2N6512
BU112	2N6672
BU114	2N6510
BU116	2N6671
BU121	BUX18
BU129	BUX18C
BU134	2N6672
BU135	2N6510
BU136	2N6510
BU137	2N6754
BU218	2N5039
BU222	2N6513
BU222A	2N6513
BU311	BUX17
BU312	BUX17
BU322	RCA8766E

Industry Type	RCA Replacement Type
BU323	RCA8766D
BU323A	RCA8766D
BU332A	RCA8766E
BU406	2N6738
BU406H	2N6738
BU407	2N6738
BU408	2N6738
BU409	2N6738
BU606	2N6671
BU607	2N6671
BU608	2N6671
BUS11	BUX31A
BUS11A	BUX31B
BUS12	BUX32A
BUS12A	BUX32B
BUV10	2N5672
BUV11N	2N6686
BUV23	2N6677
BUV24	2N6678
BUW24	2N6542
BUW34	BUX32
BUW35	BUX32
BUW36	BUX32A
BUW44	2N6678
BUW57	2N5672
BUW58	2N6686
BUW66	RCA8766B
BUW67	RCA8766
BUW73	2N6676
BUW74	2N6674
BUW75	2N6674
BUW76	BUX32
BUW77	BUX32
BUX10	BUX10A
BUX11	BUX11
BUX12	BUX12
BUX13	BUX13
BUX14	BUX14
BUX15	BUX15
BUX20	BUX20A
BUX26	2N6510
BUX27	BUX18C
BUX28	RCA8766A
BUX39	BUX39
BUX40	BUX40A
BUX42	BUX42
BUX43	BUX43
BUX44	BUX44
BUX46	BUX31A
BUX47A	BUX32A
BUX48A	2N6752
BUX63	2N6079
BUX80	BUX32
BUX81	BUX32B
BUX82	BUX31
BUX83	BUX31B
BUX97	BUX31
BUX97A	BUX31
BUX97B	BUX31A
BUX407H	2N6738
BUY18S	2N6671
BUY20	2N6671
BUY21	2N6671
BUY21A	2N6671
BUY22	2N6673

Industry Type	RCA Replacement Type
BUY23	2N6673
BUY23A	2N6673
BUY35	2N6511
BUY43	BDY71
BUY46	2N3053
BUY51A	2N5039
BUY52A	2N5671
BUY53A	2N5038
BUY54A	2N5672
BUY55	2N5239
BUY56	2N5239
BUY66	BU126
BUY67	BU126
BUY69A	BUX31B
BUY69B	BUX31
BUY69C	BUX31
BUY70A	BUX31B
BUY70B	BUX31
BUY70C	BUX31
BUY72	2N5239
BUY74	BUX18A
BUY75	BUX18C
BUY76	BU126
BUY77	BUX18A
BUY78	BUX18C
BUY79	BU126
BUY94	BUX31
BUY95	BUX31
BUY96	BUX31
BUZ	RFP12N08
BUZ10	RFP18N08
BUZ10A	RFP18N08
BUZ14D	RFM12N08
BUZ20	RFP12N10
BUZ20A	RFP12N10
BUZ20B	RFP10N12
BUZ23	RFM12N10
BUZ23A	RFM15N12
BUZ25	RFM18N10
BUZ30	RFP8N20
BUZ32	RFP8N20
BUZ32A	RFP10N15
BUZ32B	RFP8N20
BUZ32C	RFP10N15
BUZ33	RFM8N20
BUZ33A	RFM8N20
BUZ33B	RFM10N15
BUZ35	RFM12N20
BUZ35A	RFM10N15
BUZ40	RFP2N50
BUZ42C	RFP3N45
BUZ42D	RFP3N50
BUZ43	RFP3N50
BUZ46B	RFM3N50
BYV32-50	RUR D810
BYV32-100	RUR D810
BYV32-150	RUR D815
BYV32-200	RUR D820
BYW29-50	RUR 810
BYW29-100	RUR 810
BYW29-150	RUR 815
BYW29-200	RUR 820
BYW51-50	BYW51-50
BYW51-100	BYW51-100
BYW51-150	BYW51-150

Industry Type	RCA Replacement Type
BYW51-200	BYW51-200
BYW80-50	RUR 810
BYW80-100	RUR 810
BYW80-150	RUR 815
BYW80-200	RUR 820
C20A	S6210A
C20B	S6210B
C20C	S6210C
C20D	S6210D
C20F	S6210A
C20U	S6210A
C22A	S6200A
C22B	S6200B
C22C	S6200C
C22F	S6200A
C22U	S6200A
C30A	2N3896
C30B	2N3897
C30C	2N3898
C30D	2N3898
C30P	2N3896
C30U	2N3896
C31A	2N3896
C31B	2N3897
C31C	2N3898
C31D	2N3898
C31P	2N3896
C31U	2N3896
C32A	2N3870
C32B	2N3871
C32D	2N3872
C32F	2N3870
C32U	2N3870
C33A	2N3870
C33B	2N3871
C33C	2N3872
C33D	2N3872
C33F	2N3870
C33U	2N3870
C34A2	2N3650
C34B2	2N3651
C34C2	2N3652
C34D2	2N3653
C34E2	S7410M
C34F2	2N3650
C35A	2N683
C35B	2N685
C35C	2N687
C35D	2N688
C35E	2N689
C35F	2N682
C35G	2N684
C35H	2N686
C35M	2N690
C35U	2N681
C38A	2N683
C38B	2N685
C38C	2N687
C38D	2N688
C38E	2N689
C38F	2N682
C38G	2N684
C38M	2N686
C38U	2N681
C40A	2N3650

Industry Type	RCA Replacement Type
C40B	2N3651
C40C	2N3652
C40D	2N3653
C40E	S7410M
C40F	2N3650
C40G	2N3654
C40H	2N3652
C40U	2N3650
C106A	C106A
C106B	C106B
C106C	C106C
C106D	C106D
C106E	C106E
C106F	C106F
C122A	C122A
C122B	C122B
C122C	C122C
C122D	C122D
C122E	C122E
C122F	C122F
C122M	C122M
C140A	2N3650
C140B	2N3651
C140C	2N3652
C140D	2N3653
C140F	2N3654
C141A	2N3655
C141B	2N3656
C141C	2N3657
C141D	2N3658
C141F	2N3654
C220A	S6210A
C220A2	S6220A
C220B	S6210B
C220B2	S6220B
C220C	S6210D
C220C2	S6200D
C220D2	S6220D
C220E	S6210M
C220E2	S6220M
C220F	S6210A
C220F2	S6220A
C220U	S6210A
C220U2	S6220A
C222A	S6200A
C222B	S6200D
C222C	S6200D
C222D	S6200D
C222E	S6200M
C222F	S6200A
C222U	S6100A
CD4000CN	CD4000AE
CD4000MD	CD4000AD
CD4000MJ	CD4000AF
CD4001BCJ	CD4001BF
CD4001BCN	CD4001BE
CD4001BMD	CD4001BD
CD4001BMJ	CD4001BF
CD4002BCJ	CD4002BE
CD4002BCN	CD4002BE
CD4002BMD	CD4002BD
CD4002BMJ	CD4002BF
CD4002CN	CD4002AE
CD4002MD	CD4002AD
CD4002MJ	CD4002AF

Industry Type	RCA Replacement Type
CD4006BCJ	CD4006BF
CD4006BCN	CD4006BE
CD4006BMD	CD4006BD
CD4006BMJ	CD4006BF
CD4006CN	CD4006AE
CD4006MD	CD4006AD
CD4006MJ	CD4006AF
CD4007CN	CD4007AE
CD4007MD	CD4007AD
CD4007MJ	CD4007AF
CD4007UBCN	CD4007UBE
CD4007UBMD	CD4007UBD
CD4008BCJ	CD4008BF
CD4008BCN	CD4008BE
CD4008BMD	CD4008BD
CD4008BMJ	CD4008BF
CD4009CN	CD4009AE
CD4009MD	CD4009AD
CD4009MJ	CD4009AF
CD4010CN	CD4010AE
CD4010MD	CD4010AD
CD4010MJ	CD4010AF
CD4011BCJ	CD4011BF
CD4011BCN	CD4011BE
CD4011BMD	CD4011BD
CD4011BMJ	CD4011BF
CD4012BMD	CD4012BD
CD4012CN	CD4012AE
CD4012MD	CD4012AD
CD4012MJ	CD4012AF
CD4013BCJ	CD4013BF
CD4013BCN	CD4013BE
CD4013BMJ	CD4013BF
CD4014BCJ	CD4014BF
CD4014BCM	CD4014BD
CD4014BMJ	CD4014BF
CD4014CN	CD4014AE
CD4014MD	CD4014AD
CD4014MJ	CD4014AF
CD4015BCJ	CD4015BF
CD4015BCN	CD4015BE
CD4015BMD	CD4015BD
CD4015CN	CD4015AE
CD4015MD	CD4015AD
CD4015MJ	CD4015AF
CD4016BCJ	CD4016BF
CD4016BCN	CD4016BE
CD4016BMD	CD4016BD
CD4016BMJ	CD4016BF
CD4016CN	CD4016AE
CD4016MD	CD4016AD
CD4016MJ	CD4016AF
CD4017BCJ	CD4017BF
CD4017BCN	CD4017BE
CD4017BMD	CD4017BD
CD4017BMJ	CD4017BF
CD4018BCN	CD4018BE
CD4018BMD	CD4018BD
CD4018BMJ	CD4018BF
CD4019BCJ	CD4018BF
CD4019BCJ	CD4019BE
CD4019BMD	CD4019BD
CD4019BMJ	CD4019BF
CD4020BCJ	CD4020BF
CD4020BCN	CD4020BE

Industry Type	RCA Replacement Type
CD4020BMD	CD4020BD
CD4020BMJ	CD4020BF
CD4021BCJ	CD4021BF
CD4021BCN	CD4021BE
CD4021BMD	CD4021BD
CD4021BMJ	CD4021BF
CD4021CN	CD4021AE
CD4021MD	CD4021AD
CD4021MJ	CD4021AF
CD4022BCJ	CD4022BF
CD4022BCN	CD4022BE
CD4022BMD	CD4022BD
CD4022BMJ	CD4022BF
CD4023BCJ	CD4023BF
CD4023BCN	CD4023BE
CD4023BMD	CD4023BD
CD4023BMJ	CD4023BF
CD4023CN	CD4023AE
CD4023MD	CD4023AD
CD4023MJ	CD4023AF
CD4024BCJ	CD4024BF
CD4024BCN	CD4024BE
CD4024BMD	CD4024BD
CD4024BMJ	CD4024BF
CD4025BCJ	CD4025BF
CD4025BCN	CD4025BE
CD4025BMD	CD4025BD
CD4025BMJ	CD4015BF
CD4025CN	CD4025AE
CD4025MD	CD4025AD
CD4025MJ	CD4025AF
CD4027BCN	CD4027BE
CD4027BMD	CD4017BD
CD4027BMJ	CD4027BF
CD4027DM	CD4027BD
CD4028BCJ	CD4028BF
CD4028BCN	CD4028BE
CD4028BMD	CD4028BD
CD4028BMJ	CD4020BF
CD4029BCJ	CD4029BF
CD4029BCN	CD4029BE
CD4029BMD	CD4029BD
CD4029BMJ	CD4029BF
CD4030BMD	CD4030BD
CD4030MD	CD4030AD
CD4030MJ	CD4039AF
CD4031BCN	CD4031BE
CD4031BDM	CD4031BD
CD4031BMD	CD4031BD
CD4031BMJ	CD4031BF
CD4034BCN	CD4034BE
CD4034BMD	CD4034BD
CD4034BMJ	CD4034BF
CD4035BCN	CD4035BE
CD4035BMD	CD4035BD
CD4035BMJ	CD4035BF
CD4040BCJ	CD4040BF
CD4040BCN	CD4040BE
CD4040BMJ	CD4040BF
CD4041BMD	CD4041UBD
CD4041CJ	CD4041UBF
CD4041CN	CD4041AE
CD4041MD	CD4041AD
CD4041MJ	CD4041AF
CD4042BCJ	CD4042BF

Industry Type	RCA Replacement Type
CD4042BCN	CD4042BE
CD4042BMD	CD4042BD
CD4042BMJ	CD4042BF
CD4043BMD	CD4043BD
CD4043CN	CD4043AE
CD4043MD	CD4043AD
CD4043MJ	CD4043AF
CD4044BMD	CD4044BD
CD4044CN	CD4044AE
CD4044MD	CD4044AD
CD4044MJ	CD4044AF
CD4045BMD	CD4045BD
CD4046BCN	CD4046BE
CD4046BMD	CD4046BD
CD4046BMJ	CD4046BF
CD4047BCJ	CD4048BF
CD4047BCN	CD4047BE
CD4047BMD	CD4047BD
CD4047BMJ	CD4047BF
CD4048BCN	CD4048BE
CD4048BMD	CD4048BD
CD4048BMJ	CD4048BF
CD4049BMD	CD4049UBD
CD4049BPC	CD4049UBE
CD4049CN	CD4049AE
CD4049MD	CD4049AD
CD4049MJ	CD4049AF
CD4050BCJ	CD4050BF
CD4050BCN	CD4050BE
CD4050BMD	CD4050BD
CD4050BMJ	CD4050BF
CD4051BCJ	CD4051BF
CD4051BMD	CD4051BD
CD4051BMJ	CD4051BF
CD4052BCJ	CD4052BF
CD4052BCN	CD4052BE
CD4052BMD	CD4052BD
CD4052BMJ	CD4052BF
CD4053BCJ	CD4052BF
CD4053BCN	CD4053BE
CD4053BMD	CD4053BD
CD4053BMJ	CD4053BF
CD4060BCJ	CD4060BF
CD4060BCN	CD4060BE
CD4060BMD	CD4060BD
CD4060BMJ	CD4060BF
CD4066BCJ	CD4066BF
CD4066BCN	CD4066BE
CD4066BMD	CD4066BD
CD4066BMJ	CD4066BF
CD4066BPC	CD4066BE
CD4069CN	CD4069AE
CD4069MD	CD4069AD
CD4069MJ	CD4069AF
CD4069UBMD	CD4069UBD
CD4070BCJ	CD4070BF
CD4070BCN	CD4070BE
CD4070BMD	CD4070BD
CD4070BMJ	CD4070BF
CD4070CN	CD4070AE
CD4070MD	CD4070AD
CD4070MJ	CD4070AF
CD4071BCJ	CD4071BF
CD4071BCN	CD4071BE
CD4071BMD	CD4071BD

Industry Type	RCA Replacement Type
CD4071BMJ	CD4071BF
CD4072BMD	CD4072BD
CD4073BCJ	CD4073BF
CD4073BCN	CD4073BE
CD4073BMD	CD4073BD
CD4073BMJ	CD4073BF
CD4075BCJ	CD4075BF
CD4075BCN	CD4075BE
CD4075BMD	CD4075BD
CD4075BMJ	CD4075BF
CD4076BCJ	CD4076BF
CD4076BCN	CD4076BE
CD4076BMD	CD4076BD
CD4076BMJ	CD4076BF
CD4081BCJ	CD4081BF
CD4081BCN	CD4081BE
CD4081BMD	CD4081BD
CD4081BMJ	CD4081BF
CD4089BCJ	CD4089BE
CD4089BMD	CD4089BD
CD4089BMJ	CD4089BF
CD4093BCJ	CD4093BF
CD4093BCN	CD4093BE
CD4093BMD	CD4093BD
CD4093BMJ	CD4093BF
CD4099BCJ	CD4099BF
CD4099BCN	CD4099BE
CD4099BMD	CD4099BD
CD4099BMJ	CD4099BF
CD4503BCJ	CD4503BF
CD4503BCN	CD4503BE
CD4503BMD	CD4503BD
CD4503BMJ	CD4503BF
CD4510BCJ	CD4510BF
CD4510BCN	CD4510BE
CD4510BMD	CD4510BD
CD4510BMJ	CD4510BF
CD4511BCJ	CD4511BF
CD4511BCN	CD4511BE
CD4511BMD	CD4511BD
CD4512BCJ	CD4512BF
CD4512BCN	CD4512BE
CD4512BMD	CD4512BD
CD4512BMJ	CD4512BF
CD4514BCJ	CD4514BF
CD4514BCN	CD4514BE
CD4514BMD	CD4514BD
CD4514BMJ	CD4514BF
CD4515BCJ	CD4515BF
CD4515BCN	CD4515BE
CD4515BMD	CD4515BD
CD4515BMJ	CD4515BF
CD4516BCJ	CD4516BF
CD4516BCN	CD4516BE
CD4516BMD	CD4516BD
CD4516BMJ	CD4516BF
CD4518BCJ	CD4518BF
CD4518BCN	CD4518BE
CD4518BMD	CD4518BD
CD4518BMJ	CD4518BF
CD4520BCJ	CD4520BF
CD4520BCN	CD4520BE
CD4520BMD	CD4520BD
CD4520BMJ	CD4520BF
CD4527BCJ	CD4527BF

Industry Type	RCA Replacement Type
CD4527BCN	CD4527BE
CD4527BMD	CD4527BD
CD4528BCJ	CD4528BF
CD4528BCN	CD4528BE
CD4528BMD	CD4528BD
CD4528BMJ	CD4528BF
CD4538BCJ	CD4538BF
CD4538BCN	CD4538BE
CD4538BMD	CD4538BD
CD4538BMJ	CD4538BF
CD4543BCJ	CD4543BF
CD4543BCN	CD4543BE
CD4543BMD	CD4543BD
CD4543BMJ	CD4543BF
CD4724BCJ	CD4724BF
CD4724BCN	CD4724BE
CD4724BMD	CD4724BD
CD4724BMJ	CD4724BF
CD40106BCJ	CD40106BF
CD40106BCN	CD40106BE
CD40106BMD	CD40106BD
CD40106BMJ	CD40106BF
CD40160BCJ	CD40160BF
CD40160BCN	CD40160BE
CD40160BMD	CD40160BD
CD40160BMJ	CD40160BF
CD40161BCJ	CD40161BF
CD40161BCN	CD40161BE
CD40161BMD	CD40161BD
CD40161BMJ	CD40161BF
CD40162BCJ	CD40162BF
CD40162BCN	CD40162BE
CD40162BMD	CD40162BD
CD40162BMJ	CD40162BF
CD40163BCJ	CD40163BF
CD40163BCN	CD40163BE
CD40163BMD	CD40163BD
CD40163BMJ	CD40163BF
CD40174BCJ	CD40174BF
CD40174BCN	CD40174BE
CD40174BMD	CD40174BD
CD40174BMJ	CD40174BF
CD40175BCJ	CD40175BF
CD40175BCN	CD40175BE
CD40175BMD	CD40175BD
CD40175BMJ	CD40175BF
CD40192BCJ	CD40192BF
CD40192BCN	CD40192BE
CD40192BMD	CD40192BD
CD40192BMJ	CD40192BF
CD40193BCJ	CD40193BF
CD40193BCN	CD40193BE
CD40193BMD	CD40193BD
CD40193BMJ	CD40193BF
CM1600	CDP1835
CM4039A	CD4039A
CS5-2T	2N3228
CS5-4T	2N3525
CS5-5-5T	2N4101
CS10-1M	S6200A
CS10-1N	S6210A
CS10-2M	S6200B
CS10-02M	S6200A
CS10-2N	S6210B
CS10-02N	S6210A

Industry Type	RCA Replacement Type
CS10-4M	S6200D
CS10-4N	S6210D
CS10-05M	S6200A
CS10-05N	S6210A
CS10-6M	S6200M
CS10-6N	S6210D
CS20-1M	S6200A
CS20-1N	S6210A
CS20-2M	S6200B
CS20-2N	S6210B
CS20-4M	S6200D
CS20-4N	S6210D
CS20-05M	S6200A
CS20-05N	S6210A
CS20-6M	S6200M
CS20-6N	S6210M
CS35-1M	2N3896
CS35-1N	2N3896
CS35-2M	2N3871
CS35-02M	2N3870
CS35-2N	2N3897
CS35-02N	2N3896
CS35-4M	2N3872
CS35-4N	2N3898
CS35-05M	2N3870
CS35-05N	2N3896
CS35-6M	2N3873
CS35-6N	2N3899
D42C1	2N6288
D42C2	2N6288
D42C3	2N6288
D42C4	2N6290
D42C5	2N6290
D42C6	2N6290
D42C7	2N6292
D42C8	2N6292
D42C9	2N6292
D42C10	2N6292
D42C11	2N6292
D42C12	2N6292
D43C1	2N6111
D43C2	2N6111
D43C3	2N6111
D43C4	2N6109
D43C5	2N6109
D43C6	2N6109
D43C7	2N6107
D43C8	2N6107
D43C9	2N6107
D43C10	2N6107
D43C11	2N6107
D43C12	2N6107
D44C1	2N6288
D44C2	2N6288
D44C3	2N6288
D44C4	2N6290
D44C5	2N6290
D44C6	2N6290
D44C7	2N6292
D44C8	2N6292
D44C9	2N6292
D44C10	2N6292
D44C11	2N6292
D44C12	BD239B
D44E1	2N6386

Industry Type	RCA Replacement Type
D44E2	2N6387
D44H1	2N6288
D44H2	2N6288
D44H4	2N6290
D44H5	2N6290
D44H7	2N6292
D44H8	2N6292
D44H10	2N6292
D44H11	2N6292
D44TD3	2N6671
D44TD4	2N6772
D44TD5	2N6773
D44TE3	2N6738
D44TE4	2N6739
D44TE5	2N6740
D45C1	2N6111
D45C2	2N6111
D45C3	2N6111
D45C4	2N6109
D45C5	2N6109
D45C6	2N6109
D45C7	2N6107
D45C8	2N6107
D45C9	2N6107
D45C10	2N6107
D45C11	2N6107
D45C12	BD240B
D45E1	2N6666
D45E2	2N6667
D45E3	2N6668
D45H1	2N6111
D45H2	2N6111
D45H4	2N6109
D45H5	2N6109
D45H7	2N6107
D45H8	2N6107
D45H10	2N6107
D45H11	2N6107
D64VE3	2N6671
D64VE4	2N6672
D64VE5	2N6673
D64VP3	2N6674
D64VP4	2N6675
D64VP5	2N6675
D64VS3	2N6674
D64VS4	2N6675
D86DM4	RFM8N18
D86DN4	RFM8N20
DTS410	RCA410
DTS411	RCA411
DTS413	RCA413
DTS423	RCA423
DTS431	RCA431
EC106A1	C106A
EC106B1	C106B
EC106M1	C106M
ESM16	2N6671
ESM16A	2N6672
ESM16B	2N6673
ESM113	2N6384
ESM114	2N6385
ESM159	2N6649
ESM160	2N6650
ESM191	2N6673
ESM213	2N6687

Industry Type	RCA Replacement Type
ESM214	2N6388
ESM217	2N6387
ESM218	2N6388
ESM259	2N6667
ESM260	2N6668
ESM261	2N6667
ESM262	2N6668
F4001BDC	CD4001BF
F4001BDM	CD4001BF
F4001BPC	CD4001BE
F4002BDC	CD4002BF
F4002BPC	CD4002BE
F4002DM	CD4002BF
F4006BDC	CD4006BF
F4006BDM	CD4006BF
F4006BPC	CD4006BE
F4007UBDC	CD4007UBF
F4007UBDM	CD4007UBF
F4007UBPC	CD4007UBE
F4008BDC	CD4008BF
F4008BDM	CD4008BF
F4008BPC	CD4008BE
F4011BDC	CD4011BF
F4011BDM	CD4011BF
F4011BPC	CD4011BE
F4012BDC	CD4012BF
F4012BDM	CD4012BF
F4012BPC	CD4012BE
F4013BDC	CD4013BF
F4013BPC	CD4013BE
F4014BDC	CD4014BF
F4014BDM	CD4014BF
F4014BPC	CD4014BE
F4015BDC	CD4015BF
F4015BDM	CD4015BF
F4015BPC	CD4015BE
F4016BDC	CD4016BF
F4016BDM	CD4016BF
F4016BPC	CD4016BE
F4017BDC	CD4017BF
F4017BDM	CD4017BF
F4017BPC	CD4017BE
F4018BDC	CD4018BF
F4018BDM	CD4018BF
F4018BPC	CD4018BE
F4019BDC	CD4019BF
F4019BDM	CD4019BF
F4019BPC	CD4019BE
F4020BDC	CD4020BF
F4020BDM	CD4020BF
F4020BPC	CD4020BE
F4021BDC	CD4021BF
F4021BDM	CD4021BF
F4021BPC	CD4021BE
F4022BDC	CD4022BF
F4022BDM	CD4022BF
F4023BDC	CD4024BF
F4023BDM	CD4023BF
F4023BPC	CD4023BE
F4024BDM	CD4024BF
F4024BPC	CD4024BE
F4025BDC	CD4025BF
F4025BDM	CD4025BF
F4025BPC	CD4025BE

Industry Type	RCA Replacement Type
F4027BDC	CD4027BF
F4027BDM	CD4027BF
F4027BPC	CD4027BE
F4028BDC	CD4028BF
F4028BDM	CD4028BF
F4028BPC	CD4028BE
F4029BDC	CD4029BF
F4029BDM	CD4029BF
F4029BPC	CD4029BE
F4030BDM	CD4030BF
F4030BPC	CD4030BE
F4031BDC	CD4031BF
F4031BDM	CD4031BF
F4031BPC	CD4031BE
F4034BDC	CD4034BF
F4034BDM	CD4034BF
F4034BPC	CD4034BE
F4035BDC	CD4035BF
F4035BDM	CD4035BF
F4035BPC	CD4035BE
F4040BDC	CD4040BF
F4040BDM	CD4040BF
F4040BPC	CD4040BE
F4041BDC	CD4041BF
F4041BDM	CD4041BF
F4041BPC	CD4041BE
F4042BDC	CD4042BF
F4042BDM	CD4042BF
F4042BPC	CD4042BE
F4043BDC	CD4043BF
F4043BDM	CD4043BF
F4043BPC	CD4043BE
F4044BDC	CD4044BF
F4044BDM	CD4044BF
F4044BPC	CD4044BE
F4045BDC	CD4045BF
F4045BDM	CD4045BF
F4045BPC	CD4045BE
F4046BDC	CD4046BF
F4046BDM	CD4046BF
F4046BPC	CD4046BE
F4047BDC	CD4047BF
F4047BDM	CD4047BF
F4047BPC	CD4047BE
F4049BDC	CD4049UBF
F4049BDM	CD4049UBF
F4049BPC	CD4049UBF
F4050BDM	CD4050BF
F4050BPC	CD4050BE
F4051BDC	CD4051BF
F4051BDM	CD4051BF
F4051BPC	CD4051BE
F4052BCD	CD4052BF
F4052BDM	CD4052BF
F4052BPC	CD4052BE
F4053BDC	CD4053BF
F4053BDM	CD4053BF
F4053BPC	CD4053BE
F4066BDC	CD4066BF
F4066BDM	CD4066BF
F4066BPC	CD4066BE
F4067BDC	CD4067BF
F4067BDM	CD4067BF
F4067BPC	CD4067BE
F4068BDC	CD4067BF

Industry Type	RCA Replacement Type
F4068BDM	CD4067BF
F4068BPC	CD4067BE
F4069UBDC	CD4069UBF
F4069UBDM	CD4069UBF
F4069UBPC	CD4069UBE
F4070BDC	CD4070BF
F4070BDM	CD4070BF
F4070BPC	CD4070BE
F4071BDC	CD4071BF
F4071BDM	CD4071BF
F4071BPC	CD4071BE
F4072BDC	CD4072BF
F4072BDM	CD4072BF
F4072BPC	CD4072BE
F4073BDC	CD4073BF
F4073BDM	CD4073BF
F4073BPC	CD4073BE
F4075BDC	CD4075BF
F4075BDM	CD4075BF
F4075BPC	CD4075BE
F4076BDC	CD4076BF
F4076BDM	CD4076BF
F4076BPC	CD4076BE
F4077BDC	CD4077BF
F4077BDM	CD4077BF
F4077BPC	CD4077BE
F4078BDC	CD4078BF
F4078BDM	CD4078BF
F4078BPC	CD4078BE
F4081BDC	CD4081BF
F4081BDM	CD4081BF
F4081BPC	CD4081BE
F4082BDC	CD4082BF
F4082BDM	CD4082BF
F4082BPC	CD4082BE
F4085BDC	CD4085BF
F4085BDM	CD4085BF
F4085BPC	CD4085BE
F4086BDC	CD4086BF
F4086BPC	CD4086BE
F4086DMN	CD4086BF
F4093BDC	CD4093BF
F4093BDM	CD4093BF
F4093BPC	CD4093BE
F4510BDC	CD4510BF
F4510BDM	CD4510BF
F4510BPC	CD4510BE
F4511BDC	CD4511BF
F4511BDM	CD4511BF
F4511BPC	CD4511BE
F4512BDC	CD4512BF
F4512BDM	CD4512BF
F4512BPC	CD4512BE
F4514BDC	CD4514BF
F4514BDM	CD4514BF
F4514BPC	CD4514BE
F4515BDC	CD4515BF
F4515BDM	CD4515BF
F4515BPC	CD4515BE
F4516BDC	CD4516BF
F4516BDM	CD4516BF
F4516BPC	CD4516BE
F4518BDC	CD4518BF
F4518BDM	CD4518BF
F4518BPC	CD4518BE

Industry Type	RCA Replacement Type
F4520BDC	CD4520BF
F4520BDM	CD4520BF
F4520BPC	CD4520BE
F4527BDC	CD4527BF
F4527BDM	CD4527BF
F4527BPC	CD4527BE
F4532BDC	CD4532BF
F4532BDM	CD4532BF
F4532BPC	CD4532BE
F4538BDC	CD4538BF
F4538BDM	CD4538BF
F4538BPC	CD4538BE
F4543BDC	CD4543BF
F4543BDM	CD4543BF
F4543BPC	CD4543BE
F4555BDC	CD4555BF
F4555BDM	CD4555BF
F4555BPC	CD4555BE
F4556BDC	CD4556BF
F4556BDM	CD4556BF
F4556BPC	CD4556BE
F4581BDC	CD40181BF
F4581BDM	CD40181BF
F4581BPC	CD40181BE
F4582BDC	CD40182BF
F4582BDM	CD40182BF
F4582BPC	CD40182BE
F4724BDC	CD4724BF
F4724BDM	CD4724BF
F4724BPC	CD4724BE
F40160BDC	CD40160BF
F40160BDM	CD40160BF
F40160BPC	CD40160BE
F40161BDC	CD40161BF
F40161BDM	CD40161BF
F40161BPC	CD40161BE
F40162BDC	CD40162BF
F40162BDM	CD40162BF
F40162BPC	CD40162BE
F40163BDC	CD40163BF
F40163BDM	CD40163BF
F40163BPC	CD40163BE
F40174BDC	CD40174BF
F40174BDM	CD40174BF
F40174BPC	CD40174BE
F40175BDC	CD40175BF
F40175BDM	CD40175BF
F40175BPC	CD40175BE
F40192BDC	CD40192BF
F40192BDM	CD40192BF
F40192BPC	CD40192BE
F40193BDC	CD40193BF
F40193BDM	CD40193BF
F40193BPC	CD40193BE
FE8A	RUR 810
FE8B	RUR 810
FE8C	RUR 815
FE8D	RUR 810
FE16A	RUR D810
FE16B	RUR D810
FE16C	RUR D815
FE16D	RUR D820
FT410	RCA410
FT411	RCA411
FT413	RCA413

Industry Type	RCA Replacement Type
FT423	RCA423
FT431	RCA431
GSRU15030	2N6774
GSRU15035	2N6775
GSRU15050	2N6776
GSTU4030	2N6671
GSTU4035	2N6672
GSTU4040	2N6673
GSTU6030	2N6674
GSTU6035	2N6675
GSTU6040	2N6675
GSTU8030	2N6674
GSTU8035	2N6675
GSTU10030	2N6674
GSTU10035	2N6675
GSTU10040	2N6675
GSTU18040	2N6675
H103SC	T2301A
H103SD	T2301A
H103SG	T2302A
H103SH	T2303A
H103SS	T2300A
H113SC	T2301A
H113SD	T2301A
H113SG	T2302A
H113SH	2N5754
H113SS	T2300A
H123SD	T2301B
H123SH	2N5755
H123SS	T2300B
H124SC	T2301B
H133SC	T2301D
H133SD	T2301D
H133SG	T2302D
H133SH	2N5756
H133SS	T2300D
H143SC	T2301D
H143SD	T2301D
H143SG	T2302D
H143SH	2N5756
H143SS	2N5757
H153SH	2N5757
H163SH	2N5757
HA1-2630	CA3020
HA1-2650	LM1558A,CA1558E
HA1-2655	LM1458H,CA1458E
HA1-2720	CA6078
HA2-2311-5	CA311T,LM311H
HA2-2520	CA3100T
HA2-2650	CA1558T,LM1558H
HA2-2655	CA1458T,LM1458H
HA2-2720	CA3078E
HB26	2N5755
HB46	2N5756
HCF4000BD	CD4000BD
HCF4000BE	CD4000BE
HCF4000BF	CD4000BF
HCF4001BD	CD4001BD
HCF4001BE	CD4001BE
HCF4001BF	CD4001BF
HCF4002BD	CD4002BD
HCF4002BE	CD4002BE
HCF4002BF	CD4002BF
HCF4006BD	CD4006BD
HCF4006BF	CD4006BF

Industry Type	RCA Replacement Type
HCF4007UBD	CD4007UBD
HCF4007UBE	CD4007UBE
HCF4007UBF	CD4007UBF
HCF4008BD	CD4008BD
HCF4008BE	CD4008BE
HCF4008BF	CD4008BF
HCF4011BD	CD4011BD
HCF4011BE	CD4011BE
HCF4011BF	CD4011BF
HCF4012BD	CD4012BD
HCF4012BE	CD4012BE
HCF4012BF	CD4012BF
HCF4013BD	CD4013BD
HCF4013BE	CD4013BE
HCF4013BF	CD4013BF
HCF4014BD	CD4014BD
HCF4014BE	CD4014BE
HCF4015BD	CD4015BD
HCF4015BE	CD4015BE
HCF4015BF	CD4015BF
HCF4016BD	CD4016BD
HCF4016BE	CD4016BE
HCF4017BD	CD4017BD
HCF4017BE	CD4017BE
HCF4017BF	CD4017BF
HCF4018BD	CD4018BD
HCF4018BE	CD4018BE
HCF4018BF	CD4018BF
HCF4019BD	CD4019BD
HCF4019BE	CD4019BE
HCF4019BF	CD4019BF
HCF4020BD	CD4020BD
HCF4020BE	CD4020BE
HCF4020BF	CD4020BF
HCF4021BD	CD4021BD
HCF4021BE	CD4021BE
HCF4021BF	CD4021BF
HCF4022BD	CD4022BD
HCF4022BE	CD4022BE
HCF4022BF	CD4022BF
HCF4023BD	CD4023BD
HCF4023BE	CD4023BE
HCF4023BF	CD4023BF
HCF4024BD	CD4024BD
HCF4024BE	CD4024BE
HCF4024BF	CD4024BF
HCF4025BD	CD4025BD
HCF4025BE	CD4025BE
HCF4025BF	CD4025BF
HCF4026BD	CD4026BD
HCF4026BE	CD4026BE
HCF4026BF	CD4026BF
HCF4027BD	CD4027BD
HCF4027BE	CD4027BE
HCF4027BF	CD4027BF
HCF4028BD	CD4028BD
HCF4028BE	CD4028BE
HCF4028BF	CD4028BF
HCF4029BD	CD4029BD
HCF4029BE	CD4019BE
HCF4029BF	CD4029BF
HCF4030BD	CD4030BD
HCF4030BE	CD4030BE
HCF4030BF	CD4030BF

Industry Type	RCA Replacement Type
HCF4031BD	CD4031BD
HCF4031BE	CD4031BE
HCF4031BF	CD4031BF
HCF4032BD	CD4032BD
HCF4032BE	CD4032BE
HCF4032BF	CD4032BF
HCF4033BD	CD4033BD
HCF4033BE	CD4033BE
HCF4033BF	CD4033BF
HCF4034BD	CD4034BD
HCF4034BE	CD4034BE
HCF4034BF	CD4034BF
HCF4035BD	CD4035BD
HCF4035BE	CD4035BE
HCF4035BF	CD4035BF
HCF4040BD	CD4040BD
HCF4040BE	CD4040BE
HCF4040BF	CD4040BF
HCF4041UBD	CD4041UBD
HCF4041UBE	CD4041UBE
HCF4041UBF	CD4041UBF
HCF4042BD	CD4042BD
HCF4042BE	CD4042BE
HCF4042BF	CD4042BF
HCF4043BD	CD4043BD
HCF4043BE	CD4043BE
HCF4043BF	CD4043BF
HCF4044BD	CD4044BD
HCF4044BE	CD4044BE
HCF4044BF	CD4044BF
HCF4045BD	CD4045BD
HCF4045BE	CD4045BE
HCF4045BF	CD4045BF
HCF4046BD	CD4046D
HCF4046BE	CD4046BE
HCF4046BF	CD4046BF
HCF4047BD	CD4047BD
HCF4047BE	CD4047BE
HCF4047BF	CD4047BF
HCF4048BD	CD4048BD
HCF4048BE	CD4048BE
HCF4048BF	CD4048BF
HCF4049UBD	CD4049UBD
HCF4049UBE	CD4049UBE
HCF4049UBF	CD4049UBF
HCF4050BD	CD4050BD
HCF4050BE	CD4050BE
HCF4050BF	CD4050BF
HCF4051BD	CD4051BD
HCF4051BE	CD4051BE
HCF4051BF	CD4051BF
HCF4052BD	CD4052BD
HCF4052BE	CD4052BE
HCF4052BF	CD4052BF
HCF4053BD	CD4053BD
HCF4053BE	CD4053BE
HCF4053BF	CD4053BF
HCF4054BD	CD4054BD
HCF4054BE	CD4054BE
HCF4054BF	CD4054BF
HCF4055BD	CD4055BD
HCF4055BE	CD4055BE
HCF4055BF	CD4055BF
HCF4056BD	CD4056BD
HCF4056BE	CD4056BE

Industry Type	RCA Replacement Type
HCF4056BF	CD4056BF
HCF4060BD	CD4060BD
HCF4060BE	CD4060BE
HCF4060BF	CD4060BF
HCF4063BD	CD4063BD
HCF4063BE	CD4063BE
HCF4063BF	CD4063BF
HCF4066BD	CD4066BD
HCF4066BE	CD4066BE
HCF4066BF	CD4066BF
HCF4067BD	CD4067BD
HCF4067BE	CD4067BE
HCF4067BF	CD4067BF
HCF4068BD	CD4068BD
HCF4068BE	CD4068BE
HCF4068BF	CD4068BF
HCF4069UBD	CD4069UBD
HCF4069UBE	CD4069UBE
HCF4069UBF	CD4069UBF
HCF4070BD	CD4070BD
HCF4070BE	CD4070BE
HCF4070BF	CD4070BF
HCF4071BD	CD4071BD
HCF4072BD	CD4072BD
HCF4072BE	CD4072BE
HCF4072BF	CD4072BF
HCF4073BD	CD4073BD
HCF4073BE	CD4073BE
HCF4073BF	CD4073BF
HCF4075BD	CD4075BD
HCF4075BE	CD4075BE
HCF4075BF	CD4075BF
HCF4076BD	CD4076BD
HCF4076BE	CD4076BE
HCF4076BF	CD4076BF
HCF4077BD	CD4077BD
HCF4077BE	CD4077BE
HCF4077BF	CD4077BF
HCF4078BD	CD4078BD
HCF4078BE	CD4078BE
HCF4078BF	CD4078BF
HCF4081BD	CD4081BD
HCF4081BE	CD4081BE
HCF4081BF	CD4081BF
HCF4082BD	CD4082BD
HCF4082BE	CD4082BE
HCF4082BF	CD4082BF
HCF4085BD	CD4085BD
HCF4085BE	CD4085BE
HCF4085BF	CD4085BF
HCF4086BD	CD4086BD
HCF4086BE	CD4086BE
HCF4086BF	CD4086BF
HCF4089BD	CD4089BD
HCF4089BE	CD4089BE
HCF4089BF	CD4089BF
HCF4093BD	CD4093BD
HCF4093BE	CD4093BE
HCF4093BF	CD4093BF
HCF4094BD	CD4094BD
HCF4094BE	CD4094BE
HCF4094BF	CD4094BF
HCF4095BD	CD4095BD
HCF4095BE	CD4095BE
HCF4095BF	CD4095BF

Industry Type	RCA Replacement Type
HCF4096BD	CD4096BD
HCF4096BE	CD4096BE
HCF4096BF	CD4096BF
HCF4097BD	CD4097BD
HCF4097BE	CD4097BE
HCF4097BF	CD4097BF
HCF4098BD	CD4098BD
HCF4098BE	CD4098BE
HCF4098BF	CD4098BF
HCF4099BD	CD4099BD
HCF4099BE	CD4099BE
HCF4099BF	CD4099BF
HCF4502BD	CD4502BD
HCF4502BE	CD4502BE
HCF4502BF	CD4502BF
HCF4508BD	CD4508BD
HCF4508BE	CD4508BE
HCF4508BF	CD4508BF
HCF4510BD	CD4510BD
HCF4510BE	CD4510BE
HCF4510BF	CD4510BF
HCF4511BD	CD4511BD
HCF4511BE	CD4511BE
HCF4511BF	CD4511BF
HCF4512BD	CD4512BD
HCF4512BE	CD4512BE
HCF4512BF	CD4512BF
HCF4514BD	CD4514BD
HCF4514BE	CD4514BE
HCF4514BF	CD4514BF
HCF4515BD	CD4515BD
HCF4515BE	CD4515BE
HCF4515BF	CD4515BF
HCF4516BD	CD4516BD
HCF4516BE	CD4516BE
HCF4516BF	CD4516BF
HCF4518BD	CD4518BD
HCF4518BE	CD4518BE
HCF4518BF	CD4518BF
HCF4520BD	CD4520BD
HCF4520BE	CD4520BE
HCF4520BF	CD4520BF
HCF4527BD	CD4527BD
HCF4527BE	CD4527BE
HCF4527BF	CD4527BF
HCF4532BD	CD4532BD
HCF4532BE	CD4532BE
HCF4532BF	CD4532BF
HCF4555BD	CD4555BD
HCF4555BE	CD4555BE
HCF4555BF	CD4555BF
HCF4556BD	CD4556BD
HCF4556BE	CD4556BE
HCF4556BF	CD4556BF
HCMP1802	CDP1802
HCMP1822	CD1822/MWS5101
HCMP1824	CDP1824
HCMP1831	CDP1831
HCMP1832	CDP1832
HCMP1833	CDP1833
HCMP1834	CDP1834
HCMP1835	CDP1835
HCMP1851	CDP1851
HCMP1852	CDP1852
HCMP1853	CDP1853

Industry Type	RCA Replacement Type
HCMP1854	CDP1854
HCMP1855	CDP1855
HCMP1856/1857	CDP1856/CDP1857
HCMP1858/1859	CDP1858/CDP1859
HCMP1861	CDP1861
HCMP1871	CDP1871
HD174C04	CD4096BD
HD174C14	CD40106BD
HD174C86	CD4070BD
HD174C86	CD4030BD
HD374C04	CD4069BE
HD374C14	CD40106BE
HD374C160	CD40160BE
HD374C161	CD40161BE
HD374C162	CD40162BE
HD374C163	CD40163BE
HD374C164	CD4015BE
HD374C165	CD4021BE
HD374C173	CD4076BE
HD374C174	CD40174BE
HD374C192	CD40192BE
HD374C193	CD40193BE
HD14503B	CD4503BE
HD14541B	CD4541BE
HEF4000B	CD4000BE
HEF4000BD	CD4000BE
HEF4001B	CD4001BE
HEF4001UB	CD4001UBE
HEF4002B	CD4002BE
HEF4006B	CD4006BE
HEF4007UB	CD4007UBE
HEF4008B	CD4008BE
HEF4011B	CD4011BE
HEF4011UB	CD4011UBE
HEF4012B	CD4012BE
HEF4013B	CD4013BE
HEF4014B	CD4014BE
HEF4015B	CD4015BE
HEF4016B	CD4016BE
HEF4017B	CD4017BE
HEF4018B	CD4018BE
HEF4019B	CD4019BE
HEF4020B	CD4020BE
HEF4021B	CD4021BE
HEF4022B	CD4022BE
HEF4023B	CD4023BE
HEF4024B	CD4024BE
HEF4025B	CD4025BE
HEF4027B	CD4027BE
HEF4028B	CD4028BE
HEF4029B	CD4029BE
HEF4030B	CD4030BE
HEF4031B	CD4031BE
HEF4035B	CD4035BE
HEF4040B	CD4040BE
HEF4041B	CD4041BE
HEF4042B	CD4042BE
HEF4043B	CD4043BE
HEF4044B	CD4044BE
HEF4046B	CD4046BE
HEF4047B	CD4047BE
HEF4049B	CD4049UBE
HEF4050B	CD4050BE
HEF4051B	CD4051BE
HEF4052B	CD4052BE

Industry Type	RCA Replacement Type
HEF4053B	CD4053BE
HEF4059B	CD4059BE
HEF4060B	CD4060BE
HEF4066B	CD4066BE
HEF4067B	CD4067BE
HEF4068B	CD4068BE
HEF4069UB	CD4069UBE
HEF4070B	CD4070BE
HEF4071B	CD4071BE
HEF4072B	CD4072BE
HEF4073B	CD4073BE
HEF4075B	CD4075BE
HEF4076B	CD4076BE
HEF4077B	CD4077BE
HEF4078B	CD4078BE
HEF4081B	CD4081BE
HEF4082B	CD4082BE
HEF4085B	CD4085BE
HEF4086B	CD4086BE
HEF4093B	CD4093BE
HEF4094B	CD4094BE
HEF4502B	CD4502BE
HEF4508B	CD4508BE
HEF4510B	CD4510BE
HEF4511B	CD4511BE
HEF4512B	CD4512BE
HEF4514B	CD4514BE
HEF4515B	CD4515BE
HEF4516B	CD4516BE
HEF4517B	CD4517BE
HEF4518B	CD4518BE
HEF4520B	CD4520BE
HEF4527B	CD4527BE
HEF4532B	CD4532BE
HEF4538B	CD4538BE
HEF4543B	CD4543BE
HEF4555B	CD4555BE
HEF4556B	CD4556BE
HEF4585B	CD4585BE
HEF4724B	CD4724BE
HEF40160B	CD40160BE
HEF40162B	CD40162BE
HEF40163B	CD40163BE
HEF40174B	CD40174BE
HEF40175B	CD40175BE
HEF40192B	CD40192BE
HEF40193B	CD40193BE
HEF40194B	CD40194BE
HM4334	MWS5114
HM6508	CDP1821
HM6514	MWS5114
HM6551	CDP1822/MWS5101
HM435101	CDP1822/MWS5101
IM6316	CDP1835
IM6402	CDP6402
IM6514C	MWS5114
IM6551	CDP1822/MWS5101
IR140A	2N3650
IR140B	2N3651
IR140C	2N3652
IR140D	2N3653
IR140F	2N3654
IR141A	2N3655
IR141B	2N3656
IR141C	2N3657

Industry Type	RCA Replacement Type
IR141D	2N3658
IR141F	2N3654
IRF120	RFM10N12
IRF121	RFM10N12
IRF122	RFM10N12
IRF123	RFM10N12
IRF130	RFM15N12
IRF131	RFM15N12
IRF132	RFM12N10
IRF133	RFM12N08
IRF142	RFM18N10
IRF143	RFM18N08
IRF220	RFM8N20
IRF221	RFM10N15
IRF222	RFM8N20
IRF223	RFM10N15
IRF230	RFM8N20
IRF231	RFM12N20
IRF232	RFM8N20
IRF233	RFM10N15
IRF240	RFM12N20
IRF241	RFM15N15
IRF242	RFM12N20
IRF243	RFM15N15
IRF322	RMF3N45
IRF323	RFM3N45
IRF420	RFM3N50
IRF421	RFM3N45
IRF422	RFM3N50
IRF423	RFM3N45
IRF510	RFP10N12
IRF511	RFP10N12
IRF512	RFP10N12
IRF513	RFP10N12
IRF520	RFP10N12
IRF521	RFP10N12
IRF522	RFP10N12
IRF523	RFP10N12
IRF530	RFP15N12
IRF531	RFP15N12
IRF532	RFP12N10
IRF533	RFP12N08
IRF540	RFP18N10
IRF541	RFP18N08
IRF542	RFP18N10
IRF543	RFP18N08
IRF610	RFP8N20
IRF611	RFP10N15
IRF612	RFP8N20
IRF613	RFP10N15
IRF620	RFP8N20
IRF621	RFP10N15
IRF622	RFP8N20
IRF623	RFP10N15
IRF630	RFP8N20
IRF631	RFP10N15
IRF632	RFP8N20
IRF633	RFP10N15
IRF640	RFP12N20
IRF641	RFP15N15
IRF642	RFP12N20
IRF643	RFP15N15
IRF710	RFP3N45
IRF711	RFP3N45
IRF712	RFP3N45

Industry Type	RCA Replacement Type
IRF713	RFP3N45
IRF722	RFP3N45
IRF723	RFP3N45
IRF820	RFP3N50
IRF821	RFP3N45
IRF822	RFP3N50
IRF823	RFP3N45
IRF9233	RFP5P15
IRF9521	RFP5P12
IRF9522	RFP5P12
IRF9523	RFP5P12
IRF9621	RFP5P15
IRF9623	RFP5P15
IRF9633	RFP5P15
IRFF110	RFL4N12
IRFF111	RFL4N12
IRFF112	RFL4N12
IRFF113	RFL4N12
IRFF120	RFL4N12
IRFF121	RFL4N12
IRFF122	RFL4N12
IRFF123	RFL4N12
IT06	T2850A
IT08	T2850A
IT16	T2850A
IT18	T2850A
IT26	T2850B
IT28	T2850B
IT36	T2850D
IT38	T2850D
IT46	T2850D
IT48	T2850D
ITT1352N	CA1352E
ITT3064C	CA3064T
ITT3064N	CA3064E
ITT3065N	CA3065E
L2003M3	T2300B
L2003M5	T2301B
L2003M7	T2302B
L2003M9	2N5755
L4003M3	T2300D
L4003M5	T2301D
L4003M7	T2302D
L4003M9	2N5756
LF156H	CA081
LF356H	CA081CT
LF356J	CA081E
LM100	CA3085E
LM124N	CA124E
LM139AJ	CA139AF
LM139AN	CA139AE
LM139J	CA139F
LM139N	CA139E
LM158AH	CA158AT
LM158AN	CA158AE
LM158AT	CA158AT
LM158H	CA258T
LM158N	CA158E
LM158P	CA158E
LM158T	CA158T
LM201AN	CA201AE
LM201AV	CA201AE
LM201H	CA201T
LM201N	CA201E
LM201T	CA201T

Industry Type	RCA Replacement Type
LM224N	CA224E
LM239AD	CA239AF
LM239AF	CA239AF
LM239AJ	CA239AF
LM239AN	CA239AE
LM239D	CA239F
LM239F	CA239F
LM239J	CA239F
LM239N	CA239N
LM258AH	CA258AT
LM258AN	CA258AE
LM258AT	CA258AT
LM258N	CA258E
LM258P	CA258E
LM258T	CA2258T
LM301AH	CA301AT,LM301AH
LM301AL	CA201AT,LM301AH
LM301AN	CA301AE,LM301AN
LM301AP	CA301AE,LM301AN
LM301AT	CA3301AT,LM301AH
LM301AV	CA301AE,LM301AN
LM307	CA307T,LM307H
LM307N	CA307E,LM307N
LM307T	CA307T,LM307H
LM311H	CA311T,LM311H
LM311L	CA311T,LM311H
LM311N	CA311E,LM311N
LM311P	CA311E,LM311N
LM311T	CA311T,LM311H
LM324N	CA324E,LM324AN
LM339D	CA339F
LM339F	CA339F
LM339J	CA339F
LM339N	CA339E,LM339N
LM358AH	CA359AT
LM358AN	CA358AE
LM358AT	CA358AT
LM358H	CA358T
LM358L	CA358T
LM358N	CA358E
LM358P	CA358E
LM358T	CA358T
LM393N	CA3290E
LM399AJ	CA339AF
LM399AN	CA399AE,LM339AN
LM555CH	CA555CT,LM555CH
LM555CN	CA555CE,LM555CN
LM555H	CA555T
LM555N	CA555E,LM555N
LM723CH	CA723CT,LM723CH
LM723CN	CA723CE,LM723CN
LM723H	CA723T,LM723H
LM723N	CA723E,LM723N
LM741CH	CA741CT,LM741CH
LM741CN	CA741CE,LM741CN
LM741H	CA741T,LM741H
LM741N	CA741E,LM741N
LM746N	CA3071
LM747CH	CA747CT
LM747CN	CA747CE
LM747H	CA747T
LM748CH	CA748CT,LM748CH
LM748CN	CA748CE,LM748CN
LM748H	CA748T,LM748H
LM1310N	CA1310E

Industry Type	RCA Replacement Type
LM1391N	CA1391E
LM1394N	CA1394E
LM1458H	CA1458T,LM1458H
LM1458N	CA1458E,LM1458N
LM1558H	CA1558T,LM1558H
LM1558N	CA1558E
LM1800N	CA758E
LM1820N	CA3123E
LM1845N	CA3120E
LM2111N	CA2111AE
LM2901N	LM2901N
LM2902N	LM2902N
LM2904N	CA2904E,LM2904N
LM2904P	CA2904E,LM2904N
LM3011H	CA3011
LM3016H	CA3026
LM3018AH	CA3018A
LM3018H	CA3018
LM3019H	CA3019
LM3028B	CA3028B
LM3028H	CA3028A
LM3039H	CA3039
LM3045D	CA3045,CA3045F
LM3046N	CA3046
LM3053H	CA3053
LM3054N	CA3054
LM3064H	CA3064
LM3064N	CA3064E
LM3065N	CA3075
LM3066N	CA3066
LM3067N	CA3067
LM3070N	CA3070
LM3071N	CA3071
LM3075N	CA3075
LM3086N	CA3086
LM3089N	CA3089E,CA3189E
LM3126N	CA3126E
LM3146AN	CA3146AE
LM3302	LM3302N
LM3302J	LM3302F
LM3401N	CA3401E
M5141T	CA741CT,LM741CH
MAC40688	T6420B
MAC40689	T6420D
MAC40690	T6420M
MAC40797	T4100M
MAC40798	T4110M
MAC-5-1	2N5569
MAC-5-2	2N5569
MAC-5-3	2N5569
MAC-5-4	2N5569
MAC-5-5	2N5570
MAC-5-6	2N5570
MAC-5-7	T4111M
MAC-5-8	T4111M
MAC-15-4	MAC-15-4
MAC-15-6	MAC-15-6
MAC-15-8	MAC-15-8
MAC-15A-4	MAC-15A-4
MAC-15A-6	MAC-15A-6
MAC-15A-8	MAC-15A-8
MAC-35-1	T6401B
MAC-35-2	T6401B
MAC-35-3	T6401B
MAC-35-4	T6401B

Industry Type	RCA Replacement Type
MAC-35-6	T6401D
MAC-35-7	T6401M
MAC-36-1	T6411B
MAC-36-2	T6411B
MAC-36-3	T6411B
MAC-36-4	T6411B
MAC-36-5	T6411B
MAC-36-6	T6411D
MAC-36-7	T6411M
MAC-37-1	T6401B
MAC-37-2	T6401B
MAC-37-3	T6401B
MAC-37-4	T6401B
MAC-37-5	T6401D
MAC-37-6	T6401D
MAC-37-7	T6401M
MAC-38-1	T6411B
MAC-38-2	T6411B
MAC-38-3	T6411B
MAC-38-4	T6411B
MAC-38-5	T6411D
MAC-38-6	T6411D
MAC-38-7	T6411M
MB8414E	MWS5114
MC135P	CA3065
MC174CG	CA747CT
MC1310P	CA1310E
MC1352P	CA1362E
MC1357P	CA2111AE
MC1357PQ	CA2111AQ
MC1358P	CA3065
MC1364G	CA3064T
MC1364P	CA3064E
MC1370P	CA3070
MC1371P	CA3071
MC1375P	CA3075
MC1389P	CA3089E,CA31893
MC1391P	CA1391E
MC1394P	CA1394E
MC1398P	CA1398E
MC1455G	CA555CT,LM555CH
MC1455P1	CA555CE,LM555CN
MC1458G	CA1458T,LM1458H
MC1458P1	CA1458E,LM1458N
MC1458T	CA1458T,LM1458H
MC1555G	CA555T
MC1555P1	CA555CE,LM555CN
MC1558P1	CA1558E
MC1558T	CA1558T,LM1558H
MC1723CG	CA723CT,LM723CH
MC1723CP	CA723CE,LM723CN
MC1723G	CA723T,LM723H
MC1741CG	CA741CT,LM741CH
MC1741CP1	CA741CE,LM741CN
MC1741G	CA741T,LM741H
MC1747G	CA747T
MC1748CG	CA748CT,LM748CH
MC1748CP1	CA748CE,LM748CN
MC1748G	CA748T,LM748H
MC3346P	CA3046
MC3386P	CA3086
MC3401P	CA3401E
MC3419	CD22419
MC14000BAL	CD4000BF
MC14000BCL	CD4000BF

Industry Type	RCA Replacement Type
MC14000BCP	CD4000BE
MC14000UBAL	CD4000UBF
MC14000UBCL	CD4000UBF
MC14000UBCP	CD4000UBE
MC14001BAL	CD4001BF
MC14001BCL	CD4001BF
MC14001BCP	CD4001BE
MC14001UBAL	CD4001UBF
MC14001UBCL	CD4001UBF
MC14001UBCP	CD4001UBE
MC14002BAL	CD4002BF
MC14002BCL	CD4002BF
MC14002BCP	CD4002BE
MC14002UBAL	CD4002UBF
MC14002UBCL	CD4002UBF
MC14002UBCP	CD4002UBE
MC14006BAL	CD4006BF
MC14006BCL	CD4006BF
MC14006BCP	CD4006BE
MC14007BCL	CD4007UBF
MC14007UBAL	CD4007UBF
MC14007UBCL	CD4007UBF
MC14007UBCP	CD4007UBE
MC14008BAL	CD4008BF
MC14008BCL	CD4008BF
MC14008BCP	CD4008BE
MC14009UBAL	CD4009UBF
MC14009UBCL	CD4009UBF
MC14009UBCP	CD4009UBE
MC14010BAL	CD4010BF
MC14010BCP	CD4010BE
MC14011BAL	CD4011BF
MC14011BAL	CD4011UBF
MC14011BCL	CD4011BF
MC14011BCP	CD4011BE
MC14011UBCL	CD4011UBF
MC14011UBCP	CD4011UBE
MC14012BAL	CD4012BF
MC14012BCL	CD4012BF
MC14012BCP	CD4012BE
MC14012UBAL	CD4012UBF
MC14012UBCL	CD4012UBF
MC14012UBCP	CD4012UBE
MC14013BAL	CD4013BF
MC14013BCL	CD4013BF
MC14013BCP	CD4013BE
MC14014BAL	CD4014BF
MC14014BCL	CD4014BF
MC14014BCP	CD4014BE
MC14015BAL	CD4015BF
MC14015BCL	CD4015BF
MC14015BCP	CD4015BE
MC14016BAL	CD4016BF
MC14016BCL	CD4016BF
MC14016BCP	CD4016BE
MC14017BAL	CD4017BF
MC14017BCL	CD4017BF
MC14017BCP	CD4017BE
MC14018BAL	CD4018BF
MC14018BCL	CD4018BF
MC14018BCP	CD4018BE
MC14019BAL	CD4019BF
MC14019BCL	CD4019BF
MC14019BCP	CD4019BE
MC14020BAL	CD4020BF

Industry Type	RCA Replacement Type
MC14020BCL	CD4020BF
MC14020BCP	CD4020BE
MC14021BAL	CD4021BF
MC14021BCL	CD4021BF
MC14021BCP	CD4021BE
MC14022BAL	CD4022BF
MC14022BCL	CD4022BF
MC14022BCP	CD4022BE
MC14023BAL	CD4023BF
MC14023BCL	CD4023BF
MC14023BCP	CD4023BE
MC14023UBAL	CD4023BF
MC14023UBCL	CD4023UBF
MC14023UBCP	CD4023UBE
MC14024BAL	CD4024BF
MC14024BCL	CD4024BF
MC14024BCP	CD4024BE
MC14025BAL	CD4025BF
MC14025BCL	CD4025UBF
MC14025BCP	CD4025BE
MC14025UBAL	CD4025UBF
MC14025UBCL	CD4025UBF
MC14025UBCP	CD4025UBE
MC14027BAL	CD4027BF
MC14027BCL	CD4027BF
MC14027BCP	CD4027BE
MC14028BAL	CD4028BF
MC14028BCL	CD4028BF
MC14028BCP	CD4028BE
MC14029BAL	CD4029BF
MC14029BCL	CD4029BF
MC14029BCP	CD4029BE
MC14032BAL	CD4032BF
MC14032BCL	CD4032BF
MC14032BCP	CD4032BE
MC14034BCL	CD4034BF
MC14034BCP	CD4034BE
MC14035BAL	CD4035BF
MC14035BCL	CD4035BF
MC14035BCP	CD4035BE
MC14038BAL	CD4038BF
MC14038BCL	CD4038BF
MC14038BCP	CD4038BE
MC14040BAL	CD4040BF
MC14040BCL	CD4040BF
MC14040BCP	CD4040BE
MC14042BAL	CD4042BF
MC14042BCL	CD4042BF
MC14042BCP	CD4042BE
MC14043BAL	CD4043BF
MC14043BCL	CD4043BF
MC14043BCP	CD4043BE
MC14044BAL	CD4044BF
MC14044BCL	CD4044BF
MC14044BCP	CD4044BE
MC14046BAL	CD4046BF
MC14046BCL	CD4046BF
MC14046BCP	CD4046BE
MC14049UBAL	CD4049UBF
MC14049UBCL	CD4049UBF
MC14049UBCP	CD4049UBE
MC14050BAL	CD4050BF
MC14050BCP	CD4050BE
MC14051BAL	CD4051BF
MC14051BCL	CD4051BF

Industry Type	RCA Replacement Type
MC14051BCP	CD4051BE
MC14052BAL	CD4052BF
MC14052BCL	CD4052BF
MC14052BCP	CD4052BE
MC14053BAL	CD4053BF
MC14053BCP	CD4053BE
MC14060BAL	CD4060BF
MC14060BCL	CD4060BF
MC14060BCP	CD4060BE
MC14066BAL	CD4066BF
MC14066BCL	CD4066BF
MC14066BCP	CD4066BE
MC14068BAL	CD4068BF
MC14068BCL	CD4068BF
MC14068BCP	CD4068BE
MC14069UBAL	CD4069UBF
MC14069UBCL	CD4069UBF
MC14069UBCP	CD4069UBE
MC14070BAL	CD4070BF
MC14070BCL	CD4070BF
MC14070BCP	CD4070BE
MC14071BAL	CD4071BE
MC14071BCL	CD4071BF
MC14071BCP	CD4071BE
MC14072BAL	CD4072BE
MC14072BCL	CD4072BF
MC14072BCP	CD4072BE
MC14073BAL	CD4073BF
MC14073BCL	CD4073BF
MC14073BCP	CD4073BE
MC14075BAL	CD4075BF
MC14075BCL	CD4075BF
MC14075BCP	CD4075BE
MC14076BAL	CD4076BF
MC14076BCL	CD4076BF
MC14076BCP	CD4076BE
MC14077BAL	CD4077BF
MC14077BCL	CD4077BF
MC14077BCP	CD4077BE
MC14078BAL	CD4078BF
MC14078BCL	CD4078BF
MC14078BCP	CD4078BE
MC14081BAL	CD4081BF
MC14081BCL	CD4081BF
MC14081BCP	CD4081BE
MC14082BAL	CD4082BF
MC14082BCL	CD4082BF
MC14082BCP	CD4082BE
MC14093BAL	CD4093BF
MC14093BCL	CD4093BF
MC14093BCP	CD4093BE
MC14094BAL	CD4094BF
MC14094BCL	CD4094BF
MC14094BCP	CD4094BE
MC14099BAL	CD4099BF
MC14099BCL	CD4099BF
MC14099BCP	CD4099BE
MC14160BAL	CD40160BF
MC14160BCL	CD40160BF
MC14160BCP	CD40160BE
MC14161BAL	CD40161BF
MC14161BCL	CD40161BF
MC14161BCP	CD40161BE
MC14162BAL	CD40162BF
MC14162BCL	CD40162BF

Industry Type	RCA Replacement Type
MC14163BAL	CD40163BF
MC14163BCL	CD40163BF
MC14163BCP	CD40163BE
MC14174BAL	CD40174BF
MC14174BCL	CD40174BF
MC14174BCP	CD40174BE
MC14175BAL	CD40175BF
MC14175BCL	CD40175BF
MC14175BCP	CD40175BE
MC14181BCL	CD40181BF
MC14181BCP	CD40181BE
MC14182BAL	CD40182BF
MC14182BCL	CD40182BF
MC14182BCP	CD40182BE
MC14194BAL	CD40194BF
MC14194BCL	CD40194BF
MC14194BCP	CD40194BE
MC14413L	CD22413F
MC14413P	CD22413E
MC14414L	CD22414F
MC14414P	CD22414E
MC14502BAL	CD4502BD
MC14502BCL	CD4502BF
MC14502BCP	CD4502BE
MC14503BAL	CD4503BF
MC14503BCL	CD4503BF
MC14504BAL	CD40109BF
MC14504BCL	CD40109BF
MC14504BCP	CD40109BE
MC14508BAL	CD4508BF
MC14508BCL	CD4508BF
MC14508BCP	CD4508BE
MC14510BAL	CD4510BF
MC14510BCL	CD4510BF
MC14510BCP	CD4510BE
MC14511BAL	CD4511BF
MC14511BCL	CD4511BF
MC14511BCP	CD4511BE
MC14511BMJ	CD4511BF
MC14512BAL	CD4512BF
MC14512BCL	CD4512BF
MC14512BCP	CD4512BE
MC14514BAL	CD4514BF
MC14514BCL	CD4514BF
MC14514BCP	CD4514BE
MC14515BAL	CD4515BF
MC14515BCP	CD4515BE
MC14516BAL	CD4516BF
MC14516BCL	CD4516BF
MC14516BCP	CD4516BE
MC14517BAL	CD4517BF
MC14517BCL	CD4517BF
MC14517BCP	CD4517BE
MC14518BAL	CD4518BF
MC14518BCL	CD4518BF
MC14518BCP	CD4518BE
MC14520BAL	CD4520BF
MC14520BCL	CD4520BF
MC14520BCP	CD4520BE
MC14527BAL	CD4527BF
MC14527BCL	CD4527BF
MC14527BCP	CD4527BE
MC14532BAL	CD4532BF
MC14532BCL	CD4532BF
MC14532BCP	CD4532BE

Industry Type	RCA Replacement Type
MC14536BAL	CD4536BF
MC14536BCL	CD4536BF
MC14536BCP	CD4536BE
MC14538BAL	CD4538BF
MC14538BCL	CD4538BF
MC14538BCP	CD4538BE
MC14541BAL	CD4541BF
MC14541BCL	CD4541BF
MC14541BCP	CD4541BE
MC14543BAL	CD4543BF
MC14543BCL	CD4543BF
MC14543BCP	CD4543BE
MC14555BAL	CD4555BF
MC14555BCL	CD4555BF
MC14555BCP	CD4555BE
MC14556BAL	CD4556BF
MC14556BCL	CD4556BF
MC14556BCP	CD4556BE
MC14581BAL	CD40181BF
MC14581BCL	CD40181BF
MC14581BCP	CD40181BE
MC14582BAL	CD40182BF
MC14582BCL	CD40182BF
MC14582BCP	CD40182BE
MC14584BAL	CD40106BF
MC14584BCL	CD40106BF
MC14584BCP	CD40106BE
MC14585BAL	CD4585BF
MC14585BCL	CD4585BF
MC14585BCP	CD4585BE
MC15000UBAL	CD4000UBF
MC15162BCP	CD40162BE
MC15403BAL	CD4503BE
MC15558G	CA1558T,LM1558H
MC34001BP	CA081AE
MC34001P	CA081E
MC34002BP	CA082AE
MC34002P	CA082E
MCM501	CDP1822/MWS5101
MCM6508	CDP1821
MCM65114	MWS5114
MCR1718-5	2N3653
MCR1718-6	2N3653
MCR1718-7	S7410M
MCR1718-8	S7410M
MCR2818-7	S6200M
MCR3818-3	S6200A
MCR3818-5	S6200D
MCR3835-1	2N3870
MCR3835-2	2N3870
MCR3835-3	2N3870
MCR3835-4	2N3871
MCR3835-5	2N3871
MCR3835-6	2N3872
MCR3835-7	2N3873
MCR3835-8	2N3873
MCR3838-1	S6200A
MCR3918-1	S6210A
MCR3918-3	S6210A
MCR3918-5	S6210D
MCR3918-7	S6210M
MCR3935-1	2N3896
MCR3935-2	2N3896
MCR3935-3	2N3896
MCR3935-4	2N3897

Industry Type	RCA Replacement Type
MCR3935-5	2N3898
MCR3935-6	2N3898
MCR3936-7	2N3899
MCR39835-8	2N3899
MD74SC138A	CDP1837C
MD74SC373A	CDP1872C/CDP1874C
MJ400	2N3585
MJ410	RCA410
MJ411	RCA411
MJ413	RCA413
MJ423	RCA423
MJ424	BUX16C
MJ425	BUX18C
MJ431	RCA431
MJ450	2N6246
MJ480	2N6470
MJ481	2N6471
MJ490	2N6246
MJ491	2N6246
MJ802	RCS258
MJ900	2N6649
MJ901	2N6650
MJ920	2N6649
MJ931	2N6650
MJ1000	RCA1000
MJ1001	RCA1001
MJ1200	2N6384
MJ1201	2N6385
MJ1800	2N5838
MJ2249	2N3879
MJ2250	2N3879
MJ2251	2N3584
MJ2252	2N3585
MJ2253	2N5955
MJ2254	2N5954
MJ2267	2N6246
MJ2268	2N6246
MJ2500	2N6050
MJ2501	2N6051
MJ2801	2N6371
MJ2840	2N3055
MJ2841	2N6254
MJ2901	2N6246
MJ2940	2N6246
MJ2941	2N6247
MJ2955	MJ2955
MJ3000	2N6057
MJ3010	BUX16B
MJ3010	2N6058
MJ3011	BUX16B
MJ3026	2N5839
MJ3027	2N5840
MJ3028	2N5840
MJ3029	BUX16A
MJ3030	BUX16C
MJ3101	2N3878
MJ3201	BUX67A
MJ3202	2N3585
MJ3430	2N5840
MJ3583	2N6211
MJ3584	2N6212
MJ3701	2N5956
MJ3760	BU126
MJ3761	BU126
MJ3771	2N3771

Industry Type	RCA Replacement Type
MJ3772	2N3772
MJ3773	2N3773
MJ3885	2N6212
MJ4000	2N6384
MJ4001	2N6385
MJ4010	2N6649
MJ4011	2N6650
MJ4030	2N6285
MJ4031	2N6286
MJ4032	2N6287
MJ4033	2N6282
MJ4034	2N6283
MJ4035	2N6284
MJ4240	2N6212
MJ4502	RCA9116E
MJ5415	2N5415
MJ5416	2N5416
MJ5600	2N3772
MJ5601	RCS258
MJ5602	2N3773
MJ5603	2N3773
MJ6000	2N3772
MJ6002	2N3773
MJ6302	2N3773
MJ11028	RCA9228A
MJ11029	RCA9229A
MJ11030	RCA9228C
MJ11031	RCA9229C
MJ11032	RCA9228C
MJ11033	RCA9229C
MJ13014	2N6751
MJ13015	2N6751
MJ13070	2N6673
MJ13080	2N6673
MJ13090	2N6675
MJ15001	MJ15001
MJ15002	MJ15002
MJ15003	MJ15003
MJ15004	MJ15004
MJ16002	2N6752
MJ16004	2N6752
MJ16006	2N6752
MJ16008	2N6752
MJ16010	2N6675
MJ16012	2N6675
MJE13002	2N6771
MJE13003	2N6773
MJE13004	2N6740
MJE13005	2N6740
MJE13006	2N6740
MJE13007	2N6740
MJE15028	2N6704
MM54C04D	CD4069BF
MM54C160D	CD40160BF
MM54C161D	CD40161BF
MM54C162D	CD40162BF
MM54C163D	CD40163BF
MM54C173D	CD4076BF
MM54C174D	CD40174BF
MM74C04N	CD4068BE
MM74C160N	CD40160BE
MM74C161N	CD40161BE
MM74C162N	CD40162BE
MM74C163N	CD40163BE
MM74C164N	CD4015BE

Industry Type	RCA Replacement Type
MM74C165N	CD4021BE
MM74C173N	CD4076BE
MM74C174N	CD40174BE
MM74C920	CDP1822/MWS5101
MM74C929	CDP1821
MM3005	2N2405
MM4000	BFT28
MM4001	BFT28A
MM4002	BFT28B
MM4003	BFT28C
MM5005	2N4036
MSM4036	CD4036A
MSM4039	CD4039A
MSM4061	CD4061
MSM4061A	CD4061A
MTM2N45	RFM3N45
MTM2N50	RFM3N50
MTM3B35	RFM3N45
MTM3N40	RFM3N45
MTM3N55	RFM3N50
MTM5N18	RFM8N20
MTM5N20	RFM8N20
MTM7N12	RFM10N15
MTM7N15	RFM10N15
MTM7N18	RFM8N18
MTM7N20	RFM8N20
MTM8N08	RFM10N12
MTM8N10	RFM10N12
MTM8N12	RFM10N12
MTM8N15	RFM10N15
MTM8N18	RFM12N20
MTM8N20	RFM12N20
MTM10N05	RFM12N08
MTM10N06	RFM12N08
MTM10N08	RFM10N12
MTM10N10	RFM10N12
MTM10N12	RFM10N15
MTM10N15	RFM10N15
MTM12N05	RFM12N08
MTM12N06	RFM12N08
MTM12N08	RFM15N12
MTM12N10	RFM15N12
MTM12N18	RFM12N18
MTM12N20	RFM12N20
MTM15N12	RFM15N12
MTM15N15	RFM15N15
MTM20N08	RFM15N12
MTM20N10	RFM15N12
MTP2N18	RFP8N18
MTP2N20	RFP8N20
MTP2N35	RFP3N45
MTP2N40	RFP3N45
MTP2N45	RFP3N45
MTP2N50	RFP3N50
MTP3N12	RFP10N15
MTP3N15	RFP10N15
MTP3N35	RFP3N45
MTP3N40	RFP3N45
MTP3N55	RFP3N50
MTP4N08	RFP10N12
MTP4N10	RFP10N12
MTP5N05	RFP10N12
MTP5N06	RFP10N12
MTP5N18	RFP8N18
MTP5N20	RFP8N20

Industry Type	RCA Replacement Type
MTP7N12	RFP10N12
MTP7N15	RFP10N15
MTP7N18	RFP8N18
MTP7N20	RFP8N20
MTP8N08	RFP10N12
MTP8N10	RFP10N12
MTP8N12	RFP10N12
MTP8N15	RFP10N15
MTP8N18	RFP8N18
MTP8N20	RFP8N20
MTP10N05	RFP12N08
MTP10N06	RFP12N08
MTP10N08	RFP10N12
MTP10N10	RFP10N12
MTP10N12	RFP10N12
MTP10N15	RFP10N15
MTP12N08	RFP15N12
MTP12N10	RFP15N12
MTP15N12	RFP15N12
MTP15N15	RFP15N15
MTP20N08	RFP15N12
MTP20N10	RFP15N12
MUR805	RUR 810
MUR810	RUR 810
MUR815	RUR 815
MUR1605CT	RUR D810
MUR1610CT	RUR D810
MUR1615CT	RUR D815
NE555L	CA555CT,LM555CH
NE555P	CA555CE,LM555CN
NE555T	CA555CT,LM555CH
NE555V	CA555CE,LM555CN
NL-570M	2N690
NL-C35A	2N683
NL-C35B	2N685
NL-C35C	2N687
NL-C35D	2N688
NL-C35E	2N689
NL-C35G	2N684
NL-C35H	2N686
NL-C35M	2N689
NL-C40A	2N3650
NL-C40B	2N3651
NL-C40C	2N3652
NL-C40D	2N3654
NL-C40E	S7410M
NL-C40G	2N3651
NL-C40H	2N3652
PD444/6514	MW55114
PD5101	CDP1822/MW55101
PM741CJ	CA741CT/LM741CH
PM741J	CA741T/LM741H
PM747CK	CA747CT
PM747K	CA747T
PMD10K60	2N6057
PMD10K100	2N6059
PMD11K60	2N6050
PMD11K80	2N6051
PMD11K100	2N6051
PMD12K40	2N6383
PMD12K60	2N6384
PMD12K80	2N6385
PMD13K40	2N6648
PMD13K60	2N6649
PMD13K80	2N6650

Industry Type	RCA Replacement Type
PMD1601K	2N6282
PMD1602K	2N6283
PMD1603K	2N6284
PMD1701K	2N6285
PMD1702K	2N6286
PMD1703K	2N6287
PS08	S6200A
PS10	2N5567
PS15	2N5567
PS16	2N5567
PS18	S6200A
PS020	S6200A
PS28	S6200B
PS035	2N3870
PS38	S6200D
PS48	S6200D
PS58	S6200M
PS68	S6200M
PS120	S6200M
PS135	2N3870
PS220	S6200B
PS235	2N3871
PS320	S6200D
PS335	2N3872
PS420	S6200D
PS435	2N3872
PS530	S6200M
PS535	2N3873
PS620	S6200M
PS635	2N3873
PT06	2N5567
PT08	2N5567
PT18	2N5567
PT025	T6401B
PT026	2N5567
PT028	2N5567
PT030	T6401B
PT036	2N5568
PT038	2N5568
PT040	2N5441
PT046	2N5568
PT048	2N5568
PT056	T4101M
PT058	T4101M
PT066	T4101M
PT068	T4101M
PT110	2N5567
PT115	2N5571
PT125	T6401B
PT130	T6401B
PT140	2N5441
PT210	2N5567
PT215	2N5571
PT225	T6401B
PT230	T6401B
PT240	2N5441
PT310	2N5568
PT315	2N5572
PT325	T6401D
PT330	T6401D
PT340	2N5442
PT410	2N5568
PT415	2N5572
PT425	T6401D
PT430	T6401D

Industry Type	RCA Replacement Type
PT440	2N5442
PT510	T4101M
PT515	T4100M
PT525	T6401M
PT530	T6401M
PT540	2N5443
PT610	T4101M
PT615	T4100M
PT625	T6401M
PT630	T6401M
Q2001MS2	T2302B
Q2006L4	T2850B
Q2008	T4121B
Q2010	T4121B
Q2015	T4120B
Q2025	T6421B
Q2040	T6420B
Q4003LA	T2850D
Q4004LA	T2850D
Q4006	T4121D
Q4006L4	T2850D
Q4008	T4121D
Q4010	T4121D
Q4015	T4120D
Q4025	T6421D
Q4040	T6420D
Q5006L4	T2850D
Q5008	T4121M
Q5010	T4121M
Q5015	T4120M
Q5025	T6421M
Q5040	T6420M
Q6008	T4121M
Q6010	T4121M
Q6015	T6420M
Q6025	T6421M
Q60406A	T6420A
RC555NB	CA555CE,LM555CN
RC555T	CA555CT,LM555CH
RC723CN	LM723CN
RC723DB	CA723CE,723CN
RC723T	CA723CT,LM723CH
RC741DB	CA741CE,LM741CN
RC741NB	CA741CE,LM741CN
RC741T	CA741T,LM741H
RC747DB	CA747CE
RC747T	CA747T
RC1458NB	CA1458E,LM1458N
RC1458T	CA1458T,LM1458T
RC3401DB	CA3401
RCA106A	S2060A
RCA106B	S2060B
RCA106D	S2060D
RCA106E	S2060E
RCA106F	S2060F
RCA106M	S2060M
RCA106Q	S2060Q
RCA106Y	S2060Y
RCA107A	S2061A
RCA107B	S2061B
RCA107C	S2061C
RCA107D	S2061D
RCA107E	S2061E
RCA107F	S2061F
RCA107M	S2061M

Industry Type	RCA Replacement Type
RCA107Q	S2061Q
RCA107Y	S2061Y
RM555T	CA555T,LM555H
RM723T	CA723T,LM723HAH
RM741T	CA741T,LM741H
RM747T	CA747T
RM1558T	CA1558T,LM1558H
RTS0202	S6200A
RTS0205	S6200A
RTS0210	S6200A
RTS0220	S6200B
RTS0230	S6200D
RTS0240	S6200D
RTS0250	S6200M
RTS0260	S6200M
RTS0502	S6200A
RTS0505	S6200A
RTS0510	S6200A
RTS0520	S6200B
RTS0530	S6200D
RTS0540	S6200D
RTS0550	S6200M
RTS0602	S6200A
RTS0605	S6200A
RTS0610	S6200A
RTS0620	S6200B
RTS0630	S6200D
RTS0640	S6200D
RTS0650	S6200M
RTS0660	S6200M
RTU0102	S6210A
RTU0105	S6210A
RTU0110	S6210A
RTU0120	S6210B
RTU0130	S6210D
RTU0140	S6210D
RTU0150	S6210M
RTU0160	S6210M
RTU0202	2N3896
RTU0205	2N3896
RTU0210	2N3896
RTU0220	2N3897
RTU0230	2N3898
RTU0240	2N3898
RTU0602	2N3896
RTU0605	2N3896
RTU0610	2N3896
RTU0620	2N3897
RTU0630	2N3898
RTU0640	2N3898
RTU0650	2N3899
RTU0660	2N3899
RTU0705	2N3896
RTU0710	2N3896
RTU0720	2N3897
RTU0730	2N3898
RTU0740	2N3898
RTU0750	2N3899
RTU0760	2N3899
S100G6	S6200A
S311M	CA311E,LM311N
S0525G	2N3870
S1003RS2	S2060A
S1003RS3	S2061A
S1006B	S6220A

Industry Type	RCA Replacement Type
S1006H	S6210A
S1008B	S6220A
S1008G	S6200A
S1008H	S6210A
S1010B	S6220A
S1010G	S6200A
S1010H	S6210A
S1016B	S6220A
S1016G	S6200A
S1016H	S6210A
S1025H	2N3870
S1025H	2N3896
S1035G	2N3870
S1035H	2N3896
S2003RS2	S2060B
S2003RS3	S2061B
S2006B	S6220B
S2006G	S6200B
S2006H	S6210B
S2008B	S6220B
S2008G	S6200B
S2008H	S6210B
S2010B	S6220B
S2010G	S6200B
S2010H	S6210B
S2016B	S6220B
S2016G	S6200B
S2016H	S6210B
S2025G	2N3871
S2025H	2N3897
S2035G	2N3871
S2035H	2N3897
S2859P	CD72859E
S4006B	S6220D
S4006G	S6200D
S4006H	S6210D
S4010B	S6220D
S4010G	S6200D
S4010H	S6210D
S4016B	S6220D
S4016G	S6200D
S4016H	S6210D
S4025G	2N3872
S4025H	2N3898
S4035G	2N3872
S4035H	2N3898
S5101	CDP1822/MWS5101
S5614	MWS5114
S6003RS2	S2060M
S6003RS3	S2061M
S6006B	S6220M
S6006G	S6200M
S6006H	S6210M
S6008G	S6200M
S6008H	S6210M
S6010B	S6220M
S6010G	S6200M
S6010H	S6210M
S6016B	S6220M
S6016G	S6200M
S6016H	S6210M
S6025G	2N3873
S6025H	2N3899
S6035G	2N3873
S6035H	2N3899

Industry Type	RCA Replacement Type
S6508	CDP1821
SC35A	2N5569
SC35B	2N5569
SC35D	2N5570
SC35F	2N5569
SC36A	2N5567
SC36B	2N5567
SC36D	2N5568
SC36F	2N5567
SC40A	2N5569
SC40B	2N5569
SC40B2	T4121B
SC40D	2N5570
SC40D2	T4121D
SC40E	T4111M
SC40E2	T4121M
SC40F	2N5569
SC41A	2N5567
SC41B	2N5567
SC41D	2N5568
SC41E	T4101M
SC41F	2N5567
SC45A	2N5569
SC45B	2N5569
SC45B2	T4121B
SC45D	2N5570
SC45D2	T4121D
SC45E	T4111M
SC45E2	T4121M
SC45F	2N5569
SC46A	2N5567
SC46B	2N5567
SC46D	2N5568
SC46E	T4101M
SC46F	2N5567
SC50A	2N5573
SC50B	2N5573
SC50B2	T4120B
SC50D	2N5574
SC50D2	T4120D
SC50E	2N5573
SC50E2	T4120M
SC50F	2N5573
SC51A	2N5571
SC51B	2N5571
SC51D	2N5572
SC51E	T4100M
SC51F	2N5571
SC60B	T6411B
SC60B2	T6421B
SC60B12	T6411B
SC60B13	T6411B
SC60B22	T6421B
SC60B23	T6421B
SC60D	T6411D
SC60D2	T6421D
SC60D12	T6411D
SC60D13	T6411D
SC60D22	T6421D
SC60D23	T6421D
SC60E	T6411M
SC60E2	T6421M
SC60E12	T6411M
SC60E13	T6411M
SC60E22	T6421M

Industry Type	RCA Replacement Type
SC60E23	T6421M
SC61B	T6401B
SC61B12	T6401B
SC61B13	T6401B
SC61D	T6401D
SC61D12	T6401D
SC61D13	T6401D
SC61E	T6401M
SC61E12	T6401M
SC61E13	T6401M
SC136A	T2322A
SC136B	T2322B
SC136D	T2322D
SC141B	SC141B
SC141D	SC141D
SC141E	SC141E
SC141M	SC141M
SC146B	SC146B
SC146D	SC146D
SC146E	SC146E
SC146M	SC146M
SC240B	2N5569
SC240B2	T4121B
SC240B12	2N5569
SC240B13	2N5569
SC240B22	T4121B
SC240B23	T4121B
SC240D	2N5570
SC240D2	T4121D
SC240D12	2N5570
SC240D13	2N5570
SC240D22	T4121D
SC240D23	T4121D
SC240E	T4121M
SC240E2	T4121M
SC240E12	T4111M
SC240E13	T4121M
SC240E22	T4121M
SC240E23	T4121M
SC241B	2N5567
SC241B12	2N5567
SC241B13	2N5567
SC241D	2N5568
SC241D12	2N5568
SC241D13	2N5567
SC241E	T4101M
SC241E12	T4101M
SC241E13	T4101M
SC245B	2N5569
SC245B2	T4121B
SC245B12	2N5569
SC245B13	2N5569
SC245B22	T4121B
SC245B23	T4121B
SC245D	2N5570
SC245D2	T4121D
SC245D12	2N5570
SC245D13	2N5570
SC245D22	T4121D
SC245D23	T4121D
SC245E	T4111M
SC245E2	T4121M
SC245E12	T4111M
SC245E13	T4111M
SC245E22	T4121M

Industry Type	RCA Replacement Type
SC245E23	T4121M
SC246B	2N5567
SC246B12	2N5567
SC246B13	2N5567
SC246D	2N5568
SC246D12	2N5568
SC246D13	2N5568
SC246E	T4101M
SC246E12	T4101M
SC246E13	T4101M
SC250B	2N5573
SC250B2	T4120M
SC250B12	2N5573
SC250B13	2N5573
SC250B22	T4120B
SC250D	2N5574
SC250D2	T4120D
SC250D12	2N5574
SC250D13	2N5574
SC250D22	T4120D
SC250E	T4110M
SC250E2	T4120M
SC250E12	T4110M
SC250E13	T4110M
SC250E22	T4120M
SC251B	2N5571
SC251B12	2N5571
SC251B13	2N5571
SC251D	2N5572
SC251D12	2N5572
SC251D13	2N5572
SC251E	T4100M
SC251E12	T4100M
SC251E13	T4100M
SCL4000BC	CD4000BF
SCL4000BD	CD4000BD
SCL4001BC	CD4001BF
SCL4001BD	CD4001BD
SCL4001BE	CD4001BE
SCL4001UBC	CD4001UBF
SCL4001UBD	CD4001UBD
SCL4001UBE	CD4001UBE
SCL4002BC	CD4002BF
SCL4002BD	CD4002BD
SCL4002BE	CD4002BE
SCL4006ABC	CD4006BF
SCL4006ABD	CD4006BD
SCL4006ABE	CD4006BE
SCL4006BC	CD4006BF
SCL4006BD	CD4006BD
SCL4006BE	CD4006BE
SCL4007UBC	CD4007UBF
SCL4007UBD	CD4007UBD
SCL4007UBE	CD4007UBE
SCL4008BC	CD4008BF
SCL4008BD	CD4008BD
SCL4008BE	CD4008BE
SCL4009UBC	CD4009UBF
SCL4009UBD	CD4009UBD
SCL4009UBE	CD4009UBE
SCL4010BC	CD4010BF
SCL4010BD	CD4010BD
SCL4010BE	CD4010BE
SCL4011BC	CD4011BF
SCL4011BD	CD4011BD

Industry Type	RCA Replacement Type
SCL4011BE	CD4011BE
SCL4011UBC	CD4011UBF
SCL4011UBD	CD4011UBD
SCL4011UBE	CD4011UBE
SCL4012BC	CD4012BF
SCL4012BD	CD4012BD
SCL4012BE	CD4012BE
SCL4013BC	CD4013BF
SCL4013BD	CD4013BD
SCL4013BE	CD4013BE
SCL4014BC	CD4014BF
SCL4014BD	CD4014BD
SCL4014BE	CD4014BE
SCL4015BC	CD4015BF
SCL4015BD	CD4015BD
SCL4015BE	CD4015BE
SCL4016BC	CD4016BF
SCL4016BD	CD4016BD
SCL4016BE	CD4016BE
SCL4017BC	CD4017BF
SCL4017BD	CD4017BD
SCL4017BE	CD4017BE
SCL4018BC	CD4018BF
SCL4018BD	CD4018BD
SCL4018BE	CD4018BE
SCL4019BC	CD4019BF
SCL4019BD	CD4019BD
SCL4019BE	CD4019BE
SCL4020ABC	CD4020BF
SCL4020ABD	CD4020BD
SCL4020ABE	CD4020BE
SCL4020BC	CD4020BF
SCL4020BD	CD4020BD
SCL4020BE	CD4020BE
SCL4021BC	CD4021BF
SCL4021BD	CD4021BD
SCL4021BE	CD4021BE
SCL4022ABC	CD4022BF
SCL4022ABD	CD4022BD
SCL4022ABE	CD4022BE
SCL4022BD	CD4022BD
SCL4022BE	CD4022BE
SCL4023BC	CD4023BF
SCL4023BD	CD4023BD
SCL4023BE	CD4023BE
SCL4024BC	CD4024BF
SCL4024BD	CD4024BD
SCL4024BE	CD4024BE
SCL4025BC	CD4025BF
SCL4025BD	CD4025BD
SCL4025BE	CD4025BE
SCL4026ABC	CD4026BF
SCL4026ABD	CD4026BD
SCL4026ABE	CD4026BE
SCL4027BC	CD4027BF
SCL4027BD	CD4027BD
SCL4027BE	CD4027BE
SCL4028BD	CD4028BD
SCL4028BE	CD4028BE
SCL4028DC	CD4028BF
SCL4029BC	CD4029BF
SCL4029BD	CD4029BD
SCL4029BE	CD4029BE
SCL4030BC	CD4030BF
SCL4030BD	CD4030BD

Industry Type	RCA Replacement Type
SCL4030BE	CD4030BE
SCL4033ABC	CD4033BF
SCL4033ABD	CD4033BD
SCL4034ABC	CD4034BF
SCL4034ABD	CD4034BD
SCL4034ABE	CD4034BE
SCL4034BC	CD4034BF
SCL4035BC	CD4035BF
SCL4035BE	CD4035BE
SCL4040ABC	CD4040BF
SCL4040ABE	CD4040BE
SCL4040BC	CD4040BF
SCL4040BD	CD4040BD
SCL4040BE	CD4040BE
SCL4041UBC	CD4041UBF
SCL4041UBD	CD4041UBD
SCL4041UBE	CD4041UBE
SCL4042BC	CD4042BF
SCL4042BD	CD4042BD
SCL4042BE	CD4042BE
SCL4043ABC	CD4043BF
SCL4043ABD	CD4043BD
SCL4043ABE	CD4043BE
SCL4043BC	CD4043BF
SCL4043BD	CD4043BD
SCL4043BE	CD4043BE
SCL4044ABC	CD4044BF
SCL4044ABD	CD4044BD
SCL4044ABE	CD4044BE
SCL4044BC	CD4044BF
SCL4044BD	CD4044BD
SCL4044BE	CD4044BE
SCL4046BC	CD4046BF
SCL4046BD	CD4046BD
SCL4046BE	CD4046BE
SCL4047BC	CD4047BF
SCL4047BD	CD4047BD
SCL4047BE	CD4047BE
SCL4049UBC	CD4049UBF
SCL4049UBD	CD4049UBD
SCL4049UBE	CD4049UBE
SCL4050BC	CD4050BF
SCL4050BD	CD4050BD
SCL4050BE	CD4050BE
SCL4051BC	CD4051BF
SCL4051BD	CD4051BD
SCL4051BE	CD4051BE
SCL4052BC	CD4052BF
SCL4052BD	CD4052BD
SCL4052BE	CD4052BE
SCL4053BC	CD4053BF
SCL4053BD	CD4053D
SCL4053BE	CD4053BE
SCL4060ABC	CD4050BE
SCL4060ABD	CD4060BD
SCL4060ABE	CD4060BE
SCL4060BC	CD4060BF
SCL4060BD	CD4060BD
SCL4060BE	CD4060BE
SCL4066BC	CD4066BF
SCL4066BD	CD4066BD
SCL4066BE	CD4066BE
SCL4068BC	CD4068BF
SCL4068BD	CD4068BD
SCL4068BE	CD4068BE

Industry Type	RCA Replacement Type
SCL4069UBC	CD4069UBF
SCL4069UBD	CD4069UBD
SCL4069UBE	CD4069UBE
SCL4070BC	CD4070BF
SCL4070BD	CD4070BD
SCL4070BE	CD4070BE
SCL4071BC	CD4071BF
SCL4071BD	CD4071BD
SCL4071BE	CD4071BE
SCL4072BC	CD4072BF
SCL4072BD	CD4072BD
SCL4072BE	CD4072BE
SCL4073BC	CD4073BF
SCL4073BD	CD4073BD
SCL4073BE	CD4073BE
SCL4075BC	CD4075BF
SCL4075BD	CD4075BD
SCL4075BE	CD4075BE
SCL4076BC	CD4076BF
SCL4076BD	CD4076BD
SCL4076BE	CD4076BE
SCL4077BC	CD4077BF
SCL4077BD	CD4077BD
SCL4077BE	CD4077BE
SCL4078BC	CD4078BF
SCL4078BD	CD4078BD
SCL4078BE	CD4078BE
SCL4081BC	CD4081BF
SCL4081BD	CD4081BD
SCL4081BE	CD4081BE
SCL4082BC	CD4082BF
SCL4082BD	CD4082BD
SCL4082BE	CD4082BE
SCL4085BC	CD4085BF
SCL4085BD	CD4085BD
SCL4085BE	CD4085BE
SCL4086BC	CD4086BF
SCL4086BD	CD4086BD
SCL4086BE	CD4086BE
SCL4093BC	CD4093BF
SCL4093BD	CD4093BD
SCL4093BE	CD4093BE
SCL4094BC	CD4094BF
SCL4094BD	CD4094BD
SCL4094BE	CD4094BE
SCL4099BC	CD4099BF
SCL4099BD	CD4099BD
SCL4099BE	CD4099BE
SCL4160BC	CD40160BF
SCL4160BD	CD40160BD
SCL4160BE	CD40160BE
SCL4161BC	CD40161BF
SCL4161BD	CD40161BD
SCL4161BE	CD40161BE
SCL4162BC	CD40162BF
SCL4162BD	CD40162BD
SCL4162BE	CD40162BE
SCL4163BC	CD40163BF
SCL4163BD	CD40163BD
SCL4163BE	CD40163BE
SCL4174BC	CD40174BF
SCL4174BD	CD40174BD
SCL4174BE	CD40174BE
SCL4502BC	CD4502BF
SCL4502BD	CD4502BD

Industry Type	RCA Replacement Type
SCL4502BE	CD4502BE
SCL4508BC	CD4508BF
SCL4508BD	CD4508BD
SCL4508BE	CD4508BE
SCL4510BC	CD4510BF
SCL4510BD	CD4510BD
SCL4510BE	CD4510BE
SCL4511BC	CD4511BF
SCL4511BD	CD4511BD
SCL4511BE	CD4511BE
SCL4512BC	CD4512BF
SCL4512BD	CD4512BD
SCL4512BE	CD4512BE
SCL4514BC	CD4514BF
SCL4514BD	CD4514BD
SCL4514BE	CD4514BE
SCL4515BC	CD4515BF
SCL4515BD	CD4515BD
SCL4515BE	CD4515BE
SCL4516BC	CD4516BF
SCL4516BD	CD4516BD
SCL4516BE	CD4516BE
SCL4517BC	CD4517BF
SCL4517BD	CD4517BD
SCL4517BE	CD4517BE
SCL4518BC	CD4518BF
SCL4518BD	CD4518BD
SCL4518BE	CD4518BE
SCL4520BC	CD4520BF
SCL4520BD	CD4520BD
SCL4520BE	CD4520BE
SCL4527BC	CD4527BD
SCL4527BD	CD4527BF
SCL4527BE	CD4527BE
SCL4528BC	CD4528BF
SCL4528BD	CD4528BD
SCL4528BE	CD4528BF
SCL4532BC	CD4532BF
SCL4532BE	CD4532BE
SCL4543BC	CD4543BF
SCL4543BD	CD4543BD
SCL4543BE	CD4543BE
SCL4555BC	CD4555BF
SCL4555BD	CD4555BD
SCL4555BE	CD4555BE
SCL4556BC	CD4556BF
SCL4556BD	CD4556BD
SCL4556BE	CD4556BE
SCL4581BC	CD40181BF
SCL4581BD	CD40181BD
SCL4581BE	CD40181BE
SCL4582BC	CD40182BF
SCL4582BD	CD40182BD
SCL4582BE	CD40182BE
SCL4584BC	CD40106BF
SCL4584BD	CD40106BD
SCL4584BE	CD40106BE
SCL4585BC	CD4585BF
SCL4585BD	CD4585BD
SCL4585BE	CD4585BE
SCM5101	CD1822/MWS5101
SCM5114	MWS5114
SCM5316	CDP1824
SD500CD	RFP3N45
SD500KD	RFP3N45

Industry Type	RCA Replacement Type
SD1005KD	RFM10N15
SD1012KD	RFM5N45
SD1014KD	RFM10N12
SD1015KD	RFM10N12
SD1104HD	RFL1N12
SD1105HD	RFL1N12
SD1114HD	RFL1N12
SD1115HD	RFL1N12
SDT410	RCA410
SDT411	RCA411
SDT413	RCA413
SDT423	RCA423
SDT431	RCA431
SDT1405	2N6675
SDT6901	2N6078
SDT6902	2N6078
SDT6903	2N6078
SDT6904	2N6078
SDT6905	2N6078
SDT6906	2N6078
SDT6907	2N6078
SDT6908	2N6078
SDT7601	2N5039
SDT7602	2N5039
SDT7603	2N5038
SDT7604	2N6496
SDT7605	2N6249
SDT7607	2N5039
SDT7608	2N5039
SDT7609	2N5038
SDT7610	2N6354
SDT7731	2N6470
SDT7732	2N6471
SDT7733	2N6472
SDT9201	2N3055
SDT9202	2N6254
SDT9203	2N4348
SDT9204	2N4348
SDT9205	2N3055
SDT9206	2N3055
SDT9207	2N6254
SDT9208	2N4348
SDT9209	2N4348
SDT9210	2N6253
SDT9702	2N4348
SDT9703	2N4348
SDT9704	2N6254
SDT9705	2N4348
SDT9706	2N4348
SDT9707	2N3055
SDT9801	2N6254
SDT9802	2N6254
SDT9803	2N6254
SDT9804	2N3773
SDT12303	2N6674
SDT13301	2N6675
SDT13302	2N6675
SDT13303	2N6675
SDT14304	2N6674
SDT40304	2N6671
SDT40305	2N6672
SE555L	CA555T
SE555N	CA555E
SE555P	CA555E
SE555T	CA555T

Industry Type	RCA Replacement Type
SE9300	TIP120
SE9301	TIP121
SE9302	TIP122
SE9303	2N6384
SE9304	2N6385
SES5401	RUR 810
SES5401C	RUR D810
SES5402	RUR 810
SES5402C	RUR D810
SES5403	RUR 815
SES5403C	RUR D815
SFC2301A	CA301AT,LM301AH
SFC2301ADC	CA301AE,LM301AN
SFC2307	CA307T,LM307H
SFC2311	CA311T,LM311H
SFC2741C	CA741CT,LM741CH
SFC2741M	CA741T,LM741H
SFC2748C	CA748CT,LM748CH
SFC2748DC	CA748CE,LM748CN
SG301AN	CA301AE,LM301AN
SG301AT	CA301AT,LM301AH
SG307N	CA307E,LM307N
SG307T	CA307T,LM307H
SG311T	CA311T,LM311H
SG723CN	CA723CE,LM723CN
SG723T	CA723T,LM723H
SG723TCT	CA723CT,LM723CH
SG741CN	CA741CE,LM741CN
SG741CT	CA741CT,LM741CH
SG741T	CA741T,LM741H
SG747CN	CA747CE
SG747CT	CA747CT
SG747T	CA747T
SG748CN	CA748CE,LM748CN
SG748CT	CA748CT,LM748CH
SG748T	CA748T,LM748H
SG1456M	CA1458E,LM1458N
SG1458T	CA1458T,LM1458H
SG1558T	CA1558T
SG2524N	CA2524E
SG3018AT	CA2018A
SG3018T	CA3018
SG3058J	CA3058
SG3059J	CA3059
SG3079J	CA3079
SG3081J	CA3081F
SG3081N	CA3081
SG3082J	CA3082F
SG3082N	CA3082
SG3401N	CA3401E
SG3524N	CA3524E
SN76115N	CA1310E
SN76116N	CA758N
SN76242N	CA3070
SN76243AN	CA3071
SN76264N	CA3072
SN76267N	CA3067
SN76298N	CA1398E
SN76564N	CA3064
SN76565N	CA3064E
SN76635N	CA3123E
SN76650N	CA1352E
SN76666N	CA3065
SN76675N	CA3075
SN76676P	CA3076

Industry Type	RCA Replacement Type
SN76689N	CA3089E,CA3189E
SPC410	RCA410
SPC411	RCA411
SPC413	RCA413
SPC423	RCA423
SPC431	RCA431
SPS08	S6210A
SPS18	S6210A
SPS20	S6210A
SPS28	S6210B
SPS38	S6210D
SPS48	S6210D
SPS58	S6210D
SPS68	S6210M
SPS120	S6210A
SPS220	S6210B
SPS320	S6210D
SPS420	S6210D
SPS520	S6210M
SPS620	S6210M
SPT06	2N5569
SPT08	2N5569
SPT10	2N5569
SPT15	2N5573
SPT16	2N5569
SPT18	2N5569
SPT025	T6411B
SPT26	2N5569
SPT28	2N5569
SPT030	T6411B
SPT36	2N5570
SPT38	2N5570
SPT40	2N5444
SPT46	2N5570
SPT48	2N5570
SPT56	T4111M
SPT58	T4111M
SPT68	T4111M
SPT110	2N5569
SPT115	2N5573
SPT125	T6411B
SPT130	T6411B
SPT140	2N5444
SPT210	2N5569
SPT215	2N5573
SPT225	T6411B
SPT230	T6411B
SPT240	2N5444
SPT310	2N5570
SPT315	2N5574
SPT325	T6411D
SPT330	T6411D
SPT340	2N5445
SPT410	2N5070
SPT415	2N5574
SPT430	T6411D
SPT440	2N5445
SPT510	T4111M
SPT515	T4110M
SPT525	T6411M
SPT530	T6411M
SPT540	2N5446
SPT610	T4111M
SPT615	T4110M
SPT625	T6411M

Industry Type	RCA Replacement Type
SPT630	T6411M
SPT640	2N5446
SSS301AJ	CA301AT,LM301AH
SSS301AP	CA301AE,LM301AN
SSS741CJ	CA741CT,LM741CH
SSS1458J	CA1458T,LM1458H
SSS1558J	CA1558T,LM1558H
STA9000	2N6671
STA9001	2N6672
STA9002	2N6674
STA9003	2N6675
STA9004	2N6676
STA9005	2N6678
STS410	RCA410
STS411	RCA411
STS413	RCA413
STS423	RCA423
STS431	RCA431
SVT7510	2N6673
SVT7511	2N6671
SVT7512	2N6671
SVT7513	2N6672
SVT7514	2N6673
SVT7515	2N6674
SVT7516	2N6674
SVT7517	2N6675
SVT7518	2N6675
SVT7519	2N6752
SVT7520	2N6752
SVT7521	2N6751
SVT7522	2N6752
SVT7523	2N6672
SVT7524	2N6673
SVT7525	2N6752
SVT7530	2N6751
SVT7531	2N6751
SVT7532	2N6752
SVT7533	2N6672
SVT7534	2N6673
SVT7535	2N6752
SVT7553	2N6677
SVT7554	2N6678
SVT7563	2N6677
SVT7564	2N6678
SVT7573	2N6677
SVT7574	2N6678
T1484	2N697
T1492	40407
T2493	2N1613
TAG136	T2322D
TAG-6-100	2N3668
TAG-6-200	2N3669
TAG-6-400	2N3670
TAG-6-500	2N4103
TAG-6-600	2N4103
TAG-10-100	S7310B
TAG-10-200	S7310B
TAG-10-400	S7310D
TAG-10-500	S7310M
TAG-10-600	S7310M
TAG-15-100	S6210A
TAG-15-200	S6210B
TAG-15-400	S6210D
TAG-15-500	S6210M
TAG-15-600	S6210M

Industry Type	RCA Replacement Type
TAG-20-100	S6210A
TAG-20-200	S6210B
TAG-20-400	S6210D
TAG-20-500	S6210M
TAG-20-600	S6210M
TAG-35-100	S6410A
TAG-35-200	S6410B
TAG-35-400	S6410D
TAG-35-500	S6410M
TAG-35-600	S6410M
TAG-200-100	T2302A
TAG-200-200	T2302B
TAG-200-400	T2302D
TAG-202-100	T2302A
TAG-202-200	T2302B
TAG-202-400	T2302D
TAG-202A-100	T2302A
TAG-202A-200	T2302B
TAG-202A-400	T2302D
TAG-203-100	T2301A
TAG-203-200	T2301B
TAG-203-400	T2301D
TAG-203A-100	T2301A
TAG-203A-200	T2301B
TAG-203A-400	T2301D
TAG-204-100	T2300A
TAG-204-200	T2300B
TAG-204-400	T2300D
TAG-204A-100	T2300A
TAG-204A-200	T2300B
TAG-204A-400	T2300D
TAG-206-100	T2302A
TAG-206-200	T2302B
TAG-206-400	T2302D
TAG-220-200	T2500B
TAG-220-400	T2500D
TAG-224-200	T2800B
TAG-224-400	T2802D
TAG-224-600	T2802M
TAG-225-200	T2800B
TAG-225-400	T2800D
TAG-225-600	T2800M
TAG-240-200	T2850B
TAG-240-400	T2850D
TAG-241-200	T2850D
TAG-245-200	T2850B
TAG-245-400	T2850D
TAG-246-200	T2850B
TAG-246-400	T2850D
TAG-255-200	T6000B
TAG-255-400	T6000D
TAG-255-600	T6000M
TAG-255A-200	T6000B
TAG-255A-400	T6000D
TAG-255A-600	T6000M
TAG-260-200	T2700B
TAG-260-400	T2700D
TAG-261-200	T2700B
TAG-261-400	T2700D
TAG-265-200	T4700B
TAG-265-400	T4700D
TAG-266-200	T4700B
TAG-266-400	T4700D
TAG-280-200	T6000B
TAG-280-400	T6000D

Industry Type	RCA Replacement Type
TAG-280-600	T6000M
TBB0747	CA747CT
TBB0748	CA748CT/LM748CN
TBB0748B	CA748CE/LM748CN
TBB1458B	CA1458E/LM145BN
TBC0747	CA747T
TC4001BP	CD4001BE
TC4001UBP	CD4001UBE
TC4002BP	CD4002BE
TC4006BP	CD4006BE
TC4007UBP	CD4007UBE
TC4008BP	CD4008BE
TC4009UBP	CD4009UBE
TC4010BP	CD4010BE
TC4011BP	CD4011BE
TC4011UBP	CD4011UBE
TC4012BP	CD4012BE
TC4013BP	CD4013BE
TC4014BP	CD4014BE
TC4015BP	CD4015BE
TC4016BP	CD4016BE
TC4017BP	CD4017BE
TC4018BP	CD4018BE
TC4019BP	CD4019BE
TC4020BP	CD4020BE
TC4021BP	CD4021BE
TC4022BP	CD4022BE
TC4023BP	CD4023BE
TC4024BP	CD4024BE
TC4025BP	CD4025BE
TC4027BP	CD4027BE
TC4028BP	CD4028BE
TC4029BP	CD4029BE
TC4030BP	CD4030BE
TC4032BP	CD4032BE
TC4034BP	CD4034BE
TC4035BP	CD4035BE
TC4036B	CD4036A
TC4038BP	CD4038BE
TC4039B	CD4039A
TC4040BP	CD4040BE
TC4042BP	CD4042BE
TC4043BP	CD4043BE
TC4044BP	CD4044BE
TC4047BP	CD4047BE
TC4049BP	CD4049UBE
TC4050BP	CD4050BE
TC4051BP	CD4051BE
TC4052BP	CD4052BE
TC4053BP	CD4053BE
TC4054BP	CD4054BE
TC4055BP	CD4055BE
TC4056BP	CD4056BE
TC4061	CD4061A
TC4063BP	CD4063BE
TC4066BP	CD4066BE
TC4068BP	CD4068BE
TC4069BP	CD4069UBE
TC4071BP	CD4071BE
TC4072BP	CD4072BE
TC4073BP	CD4073BE
TC4075BP	CD4075BE
TC4076BP	CD4076BE
TC4078BP	CD4078BE
TC4081BP	CD4081BE

Industry Type	RCA Replacement Type
TC4082BP	CD4082BE
TC4083BP	CD4083BE
TC4085BP	CD4085BE
TC4086BP	CD4086BE
TC4093BP	CD4093BE
TC4094BP	CD4094BE
TC4508BP	CD4508BE
TC4510BP	CD4510BE
TC4511BP	CD4511BE
TC4512BP	CD4512BE
TC4514BP	CD4514BE
TC4515BP	CD4515BE
TC4516BP	CD4516BE
TC4518BP	CD4518BE
TC4520BP	CD4520BE
TC4527BP	CD4527BE
TC4532BP	CD4532BE
TC4543BP	CD4543BE
TC4556BP	CD4556BE
TC4585BP	CD4585BE
TC5501P	CDP182/MWS5101
TC5507AP	MWS5114
TC5508P	CDP1821
TC5514P	MWS5114
TC40160BP	CD40160BE
TC40161BP	CD40161BE
TC40162BP	CD40162BE
TC40163BP	CD40163BE
TC40174BP	CD40174BE
TC40175BP	CD40175BE
TC40192BP	CD40192BE
TC40193BP	CD40193BE
TCA270	CA270
TDA2002H	CA2002M
TDA2002V	CA2002M
TDA3081N	CA3081
TDA3082N	CA3082
TDA3083N	CA3083
TDA7607	CA7607E
TDA7611	CA7611E
TDAL113A	2N5754
TDAL113S	T2300B
TDAL223A	2N5756
TDB0723	CA723CT,LM723CH
TDB723A	CA723CE,LM723CN
TDC0723	CA723T,LM723H
TIC20	2N5567
TIC21	2N5568
TIC22	2N5569
TIC23	2N5570
TIC106A	S2060A
TIC106B	S2060B
TIC106C	S2060C
TIC106D	S2060D
TIC106F	S2060F
TIC106Y	S2060Y
TIC116A	C112A
TIC116B	C122B
TIC116D	C122D
TIC116E	C122E
TIC116F	C122F
TIC116M	C122M
TIC122A	C122A
TIC122B	C122B
TIC122C	C122C

Industry Type	RCA Replacement Type
TIC122D	C122D
TIC122E	C122E
TIC122F	C122F
TIC126A	2N6395
TIC126B	2N6396
TIC126C	2N6397
TIC126D	2N6397
TIC126E	2N6398
TIC126F	2N6348A
TIC126M	2N6398
TIC226B	T2800B
TIC226D	T2800D
TIC236B	2N6346A
TIC236D	2N6347A
TIC250B	T6401B
TIC250D	T6401D
TIC250E	T6401M
TIC250M	T6401M
TIC252B	T6411B
TIC252D	T6411D
TIC252E	T6411M
TIC252M	T6411M
TIC260B	T6401B
TIC260D	T6401D
TIC260E	T6401M
TIC260M	T6401M
TIC262B	T6411B
TIC262D	T6411D
TIC262E	T6411M
TIC262M	T6411M
TIC270B	2N5441
TIC270D	2N5442
TIC270E	2N5443
TIC270M	2N5443
TIC272B	2N5444
TIC272D	2N5445
TIC272E	2N5446
TIC272M	2N5446
TIP29	TIP29
TIP29A	TIP29A
TIP29B	TIP29B
TIP29C	TIP29C
TIP30	TIP30
TIP30A	TIP30A
TIP30B	TIP30B
TIP30C	TIP30C
TIP31	TIP31
TIP31A	TIP31A
TIP31B	TIP31B
TIP31C	TIP31C
TIP32	TIP32
TIP32A	TIP32A
TIP32C	TIP32C
TIP41	TIP41
TIP41A	TIP41A
TIP41B	TIP41B
TIP41C	TIP41C
TIP42	TIP42
TIP42A	TIP42A
TIP42B	TIP32B
TIP42C	TIP42C
TIP47	TIP47
TIP48	TIP48
TIP49	TIP49
TIP50	TIP50

Industry Type	RCA Replacement Type
TIP75	2N6738
TIP75A	2N6738
TIP75B	2N6738
TIP75C	2N6740
TIP100	TIP100
TIP111	TIP111
TIP112	TIP112
TIP115	TIP115
TIP116	TIP116
TIP117	TIP117
TIP120	TIP120
TIP121	TIP121
TIP122	TIP122
TIP125	TIP125
TIP127	TIP127
TIP130	BDX33A
TIP131	BDX33B
TIP132	BDX33C
TIP135	BDX34A
TIP136	BDX34B
TIP137	BDX34C
TIP140	2N6387
TIP141	2N6530
TIP142	2N6531
TIP145	2N6666
TIP146	2N6667
TIP525	2N6668
TIP527	2N6674
TIP531	2N6250
TIP532	2N6675
TIP535	BUX17A
TIP536	2N6674
TIP537	2N6675
TIP538	2N6250
TIP539	2N6250
TIP544	2N6248
TIP546	2N6469
TIP554	2N6671
TIP555	2N6672
TIP556	2N6683
TIP562	TIP562
TIP563	TIP563
TIP620	2N6383
TIP621	2N6384
TIP622	2N6385
TIP640	2N6384
TIP641	2N6385
TIP642	2N6385
TIP645	2N6666
TIP646	2N6667
TIP3054	RCA3054
TL080ACP	CA080AE,CA080BE
TL080AML	CA080AT
TL080CL	CA080CT
TL080CP	CA080E
TL080ML	CA080T
TL081ACP	CA081AE
TL081AML	CA081AT
TL081BCP	CA081BE
TL081CL	CA080CT
TL081CP	CA081E
TL081ML	CA081T
TL082	CA082CT
TL082ACP	CA082AE
TL082BCP	CA082BE

Industry Type	RCA Replacement Type
TL082CP	CA082E
TL082ML	CA082T
TL083ACN	CA083AE
TL083CN	CA083E
TL084ACN	CA084AE
TL084BCN	CA084BE
TL084CN	CA084E
TP4000AN	CD4000AE
TP4001AN	CD4002AE
TP4001AN	CD4001AE
TP4001BN	CD4001BE
TP4007AN	CD4007AE
TP4007UBN	CD4007UBE
TP4008BN	CD4008BE
TP4009AN	CD4009AE
TP4009UBN	CD4009UBE
TP4010AN	CD4010AE
TP4010BN	CD4010BE
TP4011AN	CD4011AE
TP4011BN	CD4011BE
TP4012AN	CD4012AE
TP4013AN	CD4013AE
TP4013BN	CD4013BE
TP4014AN	CD4014AE
TP4015AN	CD4015AE
TP4016AN	CD4016AE
TP4016BN	CD4016BE
TP4016UBN	CD4016BE
TP4017AN	CD4017AE
TP4018AN	CD4018AE
TP4018BN	CD4018BE
TP4019AN	CD4019AE
TP4020AN	CD4020AE
TP4020BN	CD4020BE
TP4021AN	CD4021AE
TP4022AN	CD4022AE
TP4023AN	CD4023AE
TP4024AN	CD4024AE
TP4024BN	CD4024BE
TP4025AN	CD4025AE
TP4027AN	CD4027AE
TP4027BN	CD4027BE
TP4028AN	CD4028AE
TP4028BN	CD4028BE
TP4029AN	CD4029AE
TP4030AN	CD4030AE
TP4030BN	CD4030BE
TP4035BN	CD4035BE
TP4040AN	CD4040AE
TP4040BN	CD4040BE
TP4042AN	CD4042AE
TP4042BN	CD4042BE
TP4043AN	CD4043AN
TP4043BN	CD4043BE
TP4044AN	CD4044AE
TP4044BN	CD4044BE
TP4049AN	CD4049AE
TP4049UBN	CD4049UBE
TP4050AN	CD4050AE
TP4050BN	CD4050BE
TP4051AN	CD4051AE
TP4051BN	CD4051BE
TP4052AN	CD4052AE
TP4052BN	CD4052BE
TP4053AN	CD4053AE

Industry Type	RCA Replacement Type
TP4053BN	CD4053BE
TP4066AN	CD4066AE
TP4068AN	CD4068AE
TP4069UBN	CD4069UBE
TP4070BN	CD4070BE
TP4071BN	CD4071BE
TP4072BN	CD4072BE
TP4073BN	CD4073BE
TP4075BN	CD4075BE
TP4081BN	CD4078BE
TP4082BN	CD4081BE
TP4083BN	CD4082BE
TP4511BN	CD4511BE
TP4512BN	CD4512BE
TP4520AN	CD4520AE
TRAL1110D	2N5569
TRAL1115D	2N5573
TRAL1125D	T6411B
TRAL1130D	T6421B
TRAL1140D	T6420B
TRAL2210D	2N5570
TRAL2215D	2N5574
TRAL2225D	T6421D
TRAL2230D	T6421D
TRAL2240D	T6420D
TS2218	2N1613
TS2904	40406
TX01A10	T2700B
TXC01A20	T2700B
TXC01A40	T2700D
TXC01B10	T2700B
TXC01B20	T2700B
TXC01B40	T2700D
TXC01C10	T2700B
TXC01C20	T2700B
TXC01C40	T2700D
TXC01D10	T2700B
TXC01D20	T2700B
TXC01D40	T2700D
TXC01E10	T2700B
TXC01E40	T2700D
TXC01F10	T2700B
TXC01F20	T2700B
TXC01F40	T2700D
TXC10E20	T2700B
TXD98A20	2N5573
TXD98A40	2N5574
TXD98A50	T4110M
TXD99A20	2N5569
TXD99A40	2N5570
TXD99A50	T4111M
TXE99A20	T6411B
TXE99A50	T6411M
TXE99140	T6411D
TY507	C122A
TY510	S2800F
TY1007	C122A
TY1010	S2800A
TY2007	C122B
TY2010	S2800B
TY3007	C122C
TY3010	S2800C
TY4007	C122D
TY4010	S2800D
TY5007	C122E

Industry Type	RCA Replacement Type
TY5010	S2800E
TY6007	C122M
TY6010	S2800M
TYAL113B	T2500B
TYAL113M	T2801B
TYAL116C	T2500B
TYAL118B	T2800B
TYAL118M	T2802B
TYAL223B	T2500D
TYAL223C	T2500D
TYAL223M	T2801D
TYAL226B	T2500D
TYAL226C	T2500D
TYAL226M	T2801D
TYAL228B	T2800D
TYAL228C	T2800D
TYAL228M	T2801D
TYAL1110B	T2800B
TYAL1110C	T2800B
TYAL1110M	T2801B
TYAL2210B	T2800D
TYAL2210C	T2800D
TYAL2210M	T2802D
U5B7741312	CA741T,LM741H
U5B7741393	CA741CT,LM741CH
U5B7748312	CA748T,LM748H
U5B7748393	CA748CT,LM748CH
U5R7723312	CA723T,LM723H
U5R7723393	CA723CT
U6A772393	CA723CE,LM723CN
U97741393	CA741CE,LM741CN
UES1401	RUR 810
UES1402	RUR 810
UES1403	RUR 815
UES2401	RUR D810
UES2402	RUR D810
UES2403	RUR D815
ULN2111A	CA2111AE
ULN2111N	CA2111AQ
ULN2124A	CA3070
ULN2125N	CA3120E
ULN2127A	CA3071
ULN2129A	CA3075
ULN2137A	CA3123E
ULN2165A	CA3065
ULN2210	CA1310E
ULN2212B	CA3012
ULN2262A	CA3126Q
ULN2267A	CA3067
ULN2269A	CA3121E
ULN2289A	CA23089E,CA3189E
ULN2298A	CA1398E
ULN3364A	CA3064
ULX2244A	CA758E
UMT1006	2N6672
UMT1007	2N6673
UMT1009	2N6675
UMT1011	2N6675
UMT1012	2N6675
UMT1203	2N6738
UMT1204	2N6740
UMT2008	2N6674
UMT3584	2N6771
UMT3585	2N6771
UMT13004	2N6738

Industry Type	RCA Replacement Type
UMT13006	2N6738
UMT13007	2N6740
UMT23005	2N6740
VHE1401	RUR 810
VHE1402	RUR 810
VHE1403	RUR 820
VHE1404	RUR 820
VN30AB	RFL1N12
VN35AB	RFL1N12
VN40AD	RFP2N12
VN46AD	RFP2N12
VN64GA	RFM10N12
VN66AD	RFP2N12
VN67AB	RFL1N12
VN67AD	RFP2N12
VN88AD	RFP2N12
VN89AB	RFL1N12
VN89AD	RFP2N12
VN90AB	RFL1N12
VN99AB	RFL1N12
VN0104N2	RFL1N12
VN0104N5	RFP2N12
VN0106N2	RFL1N12
VN0106N5	RFP2N12
VN0108N2	RFL1N12
VN0108N5	RFP2N12
VN0109N2	RFL1N12
VN0109N5	RFP2N12
VN0204N2	RFL1N08
VN0204N5	RFP2N08
VN0206N2	RFL1N08
VN0206N5	RFP2N08
VN0208N2	RFL1N08
VN0208N5	RFP2N08
VN0209N2	RFL1N10
VN0209N5	RFP2N10
VN0330N1	RFM3N45
VN0330N5	RFP3N45
VN0335N1	RFM3N45
VN0335N5	RFP3N45
VN0340N1	RFM3N45
VN0340N5	RFP3N45
VN0345N1	RFM3N45
VN0345N5	RFP3N45
VN1204N1	RFM10N12
VN1204N5	RFP10N12
VN1206N1	RFM10N12
VN1206N5	RFP10N12
VN1208N1	RFM10N12
VN1208N5	RFP10N12
VN1209N1	RFM10N12
VN1209N5	RFP10N12
ZVN01A2B	RFL1N08
ZVN01A2L	RFP2N08
ZVN01A3B	RFL1N08
ZVN01A3L	RFP2N08
ZVN11A2L	RFP10N12
ZVN11A2M	RFM10N12
ZVN11A3L	RFP10N12
ZVN11A3M	RFM10N12
ZVN12A2L	RFP12N08
ZVN12A2M	RFM12N08
ZVN12A3L	RFP12N08
ZVN12A3M	RFM12N08
ZVN020FL	RFP2N08

Industry Type	RCA Replacement Type
ZVN0104B	RFL1N12
ZVN0104L	RFP2N12
ZVN0106B	RFL1N12
ZVN0106L	RFP2N12
ZVN0108B	RFL1N12
ZVN0108L	RFP2N12
ZVN0109B	RFL1N12
ZVN0109L	RFP2N12
ZVN0110B	RFL1N12
ZVN0110L	RFP2N12
ZVN0114B	RFL1N15
ZVN0114L	RFP2N15
ZVN0204B	RFL1N12
ZVN0206B	RFL1N12
ZVN0206L	RFP2N08
ZVN0208B	RFL1N12
ZVN0208L	RFP2N08
ZVN0209B	RFL1N12
ZVN0209L	RFP2N08
ZVN0210B	RFL1N12
ZVN0210L	RFP2N08
ZVN0214B	RFL1N15
ZVN0214L	RFP2N15
ZVN0216B	RFL1N18
ZVN0216L	RFP2N18
ZVN0220B	RFL1N20
ZVN0220L	RFP2N20
ZVN0330L	RFP3N45
ZVN0330M	RFM3N45
ZVN0335L	RFP3N45
ZVN0335M	RFM3N45
ZVN0340L	RFP3N45
ZVN0340M	RFM3N45
ZVN0345L	RFP3N45
ZVN0345M	RFM3N45
ZVN0350L	RFP3N50
ZVN0350M	RFM3N50
ZVN1104L	RFP10N12
ZVN1104M	RFM10N12
ZVN1106L	RFP10N12
ZVN1106M	RFM10N12
ZVN1108L	RFP10N12
ZVN1108M	RFM10N12
ZVN1109L	RFP10N12
ZVN1109M	RFP10N12
ZVN1110B	RFL1N12
ZVN1110L	RFP2N12
ZVN1114B	RFL1N15
ZVN1114L	RFP2N15
ZVN1116B	RFL1N18
ZVN1116L	RFP2N18
ZVN1120B	RFL1N20
ZVN1120L	RFP2N20
ZVN1204L	RFP10N12
ZVN1204M	RFM10N12
ZVN1206L	RFP10N12
ZVN1206M	RFM10N12
ZVN1208L	RFP10N12
ZVN1208M	RFM10N12
ZVN1209L	RFP10N12
ZVN1209M	RFM10N12
ZVN1210L	RFP10N12
ZVN1210M	RFM10N12
ZVN1214L	RFP10N15
ZVN1214M	RFM10N15

Industry Type	RCA Replacement Type
ZVN1216L	RFP8N18
ZVN1216M	RFM8N18
ZVN1220L	RFP8N20
ZVN1220M	RFM8N20
μA301AH	CA301AT,LM301AH
μA301AT	CA301AE,LM301AN
μA307H	CA307,LM307H
μA307T	CA307E,LM307N
μA311H	CA311T,LM311H
μA311T	CA311E,LM311N
μA555HC	CA555CT,LM555CH
μA555HM	CA555T
μA555TC	CA555CE,LM555CN
μA720PC	CA3123E
μA723CA	CA723CE,LM723CN
μA723CL	CA723CT,LM723CH
μA723CN	CA723CE,LM723CN
μA723HC	CA723CT,LM723CH
μA723HM	CA723T,LM723H
μA723ML	CA723E,LM723N
μA723PC	CA723CE,LM723CN
μA741CL	CA741CT,LM741CH
μA741CN	CA741CE,LM741CN
μA741CP	CA741CE,LM741CN
μA741CT	CA741CE,LM741CN
μA741HC	CA741CT,LM741CH
μA741HM	CA741,LM741H
μA741ML	CA741T,LM741H
μA741MN	CA741CE,LM741N
μA741MP	CA741E,LM741N
μA741PC	CA741CE,LM741CN
μA746PC	CA3072
μA747A	CA747EH
μA747CA	CA747CE
μA747CL	CA747CT
μA747CN	CA747CE
μA747HC	CA747CT
μA747HM	CA747T
μA747M1	CA747T
μA747MN	CA747E
μA747PC	CA747CE
μA748CL	CA748CT,LM748CH
μA748CN	CA748CE,LM748CN
μA748CP	CA748CE,LM748CN
μA748CT	CA748CT,LM748CH
μA748HC	CA748CT,LM748CH
μA748HM	CA748T,LM748H
μA748ML	CA748T,LM748H
μA748MN	CA748E,LM748N
μA748MP	CA748E,LM748N
μA748T	CA748E,LM748N
μA748TC	CA748CE,LM748CN
μA758PC	CA758E
μA780PC	CA3070
μA781PC	CA3071
μA787PC	CA3126Q
μA1391T	CA1391E
μA1394T	CA1394E
μA1458HC	CA1458T,LM1458H
μA1458TC	CA1458E,LM1458N
μA1558HM	CA1558T
μA3018AHM	CA3018A
μA3018HM	CA3018
μA3019HM	CA3019
μA3026HM	CA3026

Industry Type	RCA Replacement Type
μ A3036M	CA3036
μ A3039HM	CA3039
μ A3045DM	CA3045,CA3045F
μ A3046DC	CA3046
μ A3054PC	CA3054
μ A3064HC	CA3064
μ A3064PC	CA3064E
μ A3065PC	CA3065
μ A3066PC	CA3066
μ A3075PC	CA3075
μ A3086DC	CA3086F
μ A3089E	CA3089E,CA3189E
μ A3401P	CA3401
μ PC151A	CA741CT,LM741CH
μ PC151C	CA741CE,LM741CN
μ PC157A	CA301AT,LM301AH
μ PC157C	CA301AE,LM301AN
μ PC251A	CA747CT
μ PC251C	CA747CE
μ PC301AC	CA301AE,LM301AN
μ PC311C	CA311E,LM311N
μ PC324C	CA324E,LM324N
μ PC339C	CA339E,LM339N
μ PC741C	CA741CE,LM741CN
μ PC1458C	CA1458E,LM1458N

Industry Type	RCA Replacement Type
μ PD4001C	CA4001AE
μ PD4002C	CD4002AE
μ PD4011C	CD4011AE
μ PD4012C	CD4012AE
μ PD4013C	CD4013AE
μ PD4014C	CD4014AE
μ PD4015C	CD4015AE
μ PD4017C	CD4017BE
μ PD4019C	CD4019AE
μ PD4020C	CD4020AE
μ PD4021C	CD4023AE
μ PD4023C	CD4023AE
μ PD4024C	CD4024BE
μ PD4025C	CD4025AE
μ PD4027C	CD4027AE
μ PD4028C	CD4028AE
μ PD4029C	CD4029AE
μ PD4030C	CD4030AE
μ PD4034C	CD4034BE
μ PD4035C	CD4035BE
μ PD4040C	CD4040BE
μ PD4042C	CD4042AE
μ PD4043C	CD4043BE
μ PD4044C	CD4044BE
μ PD4049C	CD4049AE

Industry Type	RCA Replacement Type
μ PD4050C	CD4050AE
μ PD4051C	CD4051BE
μ PD4052C	CD4052BE
μ PD4053C	CD4053BE
μ PD4063C	CD4063BE
μ PD4066C	CD4066AE
μ PD4069C	CD4069UBE
μ PD4071C	CD4071BE
μ PD4072C	CD4072BE
μ PD4073C	CD4073BE
μ PD4075C	CD4075BE
μ PD4081C	CD4081BE
μ PD4082C	CD4082BE
μ PD4093C	CD4093BE
μ PD4094C	CD4094BE
μ PD4099C	CD4099BE
μ PD4508C	CD4508BE
μ PD4510C	CD4510BE
μ PD4511C	CD4511BE
μ PD4514C	CD4515BE
μ PD4516C	CD4516BE
μ PD4518C	CD4518BE
μ PD4520C	CD4520BE
μ PD4532C	CD4532BE
μ PD4555C	CD4555BE
μ PD4556C	CD4556BE

RCA Sales Offices

U.S.

ALABAMA

RCA
303 Williams Avenue,
Suite 133
303 Williams Avenue,
Huntsville, AL 35801

Tel: (205) 533-5200

ARIZONA

RCA
6900 E. Camelback Road, Suite
460, Scottsdale, AZ 85251

Tel: (602) 947-7235

CALIFORNIA

RCA
4546 El Camino Real,
Los Altos, CA 94022

Tel: (415) 948-8996

RCA
4827 No. Sepulveda Blvd., Suite
420, Sherman Oaks, CA 91403

Tel: (213) 468-4200

RCA
17731 Irvine Blvd., Suite 104
Magnolia Plaza Bldg., Tustin,
CA 92680

Tel: (714) 832-5302

COLORADO

RCA Corp.
6767 So. Spruce Street
Englewood, CO 80112

Tel: (303) 740-8441

FLORIDA

RCA
P.O. Box 12247, Lake Park, FL
33403

Tel: (305) 626-6350

ILLINOIS

RCA
2700 River Road, Des Plaines
IL 60018

Tel: (312) 391-4380

INDIANA

RCA
9240 N. Meridian Street, Suite
102, Indianapolis, IN 46260

Tel: (317) 267-6375

KANSAS

RCA
8900 Indian Creek Parkway,
Suite 410,
Overland Park, KS 66210

Tel: (913) 642-7656

MASSACHUSETTS

RCA
20 William Street, Wellesley,
MA 02181

Tel: (617) 237-7970

MICHIGAN

RCA
30400 Telegraph Road, Suite
440, Birmingham, MI 48010

Tel: (313) 644-1151

MINNESOTA

RCA
6750 France Avenue, So., Suite
122, Minneapolis, MN 55435

Tel: (612) 929-0676

NEW JERSEY

RCA
1998 Springdale Road,
Cherry Hill, NJ 08003

Tel: (609) 338-5042

RCA
67 Walnut Avenue, Clark, NJ
07066

Tel: (201) 574-3550

NEW YORK

RCA
160 Perinton Hill Office Park
Fairport, NY 14450

Tel: (716) 223-5240

OHIO

RCA
6600 Busch Blvd., Suite 110,
Columbus, OH 43229

Tel: (614) 436-0036

TENNESSEE

RCA
1111 Northshore Drive,
Northshore Center 2,
Suite 405,
Knoxville, TN 37919

Tel: (615) 588-2467

TEXAS

RCA Center
4230 LBJ at Midway Road
Town No. Plaza, Suite 121
Dallas, TX 75234

Tel: (214) 661-3515

VIRGINIA

RCA
1901 N. Moore Street
Arlington, VA 22209

Tel: (703) 558-4161

Canada

Alberta

RCA Inc.
6303 30th Street, SE,
Calgary, Alberta T2C 1R4

Tel: (403) 279-3384

Quebec

RCA Inc.
21001 Trans-Canada Highway,
St. Anne-de-Bellevue,
Quebec H9X 3L3

Tel: (514) 457-2185

Ontario

RCA Inc.
1 Vulcan Street, Rexdale,
Ontario M9W 1L3

Tel: (416) 247-5491

Belgium

RCA S.A.
Mercure Centre, Rue de la
Fusée 100, 1130 Bruxelles

Tel: 02/720.89.80

France

RCA S.A.
2-4 Avenue de L'Europe
78140 Velizy

Tel: (3) 946.56.56

Germany

RCA GmbH
Pfingstrosenstrasse 29,
8000 München 70
West Germany

Tel: 089/7143047-49

Italy

RCA GmbH
Justus-von-Liebig-Ring 10
2085 Quickborn
West Germany

Tel: 04106/613-0

RCA GmbH
Zeppelinstrasse 35,
7302 Ostfildern 4 (Kemnat)
West Germany

Tel: 0711/454001-04

RCA SpA
Piazza San Marco 1
20121 Milano

Tel: (02) 65.97.048-051

Sweden

RCA International LTD
Box 3047, Hagalundsgatan 8
171 03 Solna 3

Tel: 08/83 42 25

U.K.

RCA LTD
Lincoln Way, Windmill Road
Sunbury-on-Thames
Middlesex TW16 7HW

Tel: 093 27 85511

Hong Kong

RCA International, Ltd.
13th Floor, Fourseas Bldg.
208-212 Nathan Road
Tsimshatsui, Kowloon

Tel: 852-3-7236339

Singapore

RCA International, Ltd.
Solid State Division, 24-15 Inter-
national Plaza, 10 Anson Road,
Singapore 0207

Tel: 2224156/2224157

Taiwan

RCA Corporation
Solid State Division,
7th Floor, 97
Nanking East Road, Section 2
Taipei

Tel: (02) 521-8537

Argentina

Ramiro E. Podetti Reps.
P.O. Box 4622
Buenos Aires 1000

Tel: 393-4029

Brazil

RCA Solid State Limitada
Av. Brig Faria Lima 1476
7th Floor, Sao Paulo 01452

Tel: 210-4033

Mexico

RCA S.A. de C.V./
Solid State Div., Avenida
Cuiclahuac 2519, Apartado
Postal 17-570, Mexico 16, D.F.

Tel: (905) 399-7228