


LTR	DESCRIPTION	DATE	BY
-	Released	5/15/00	JCL

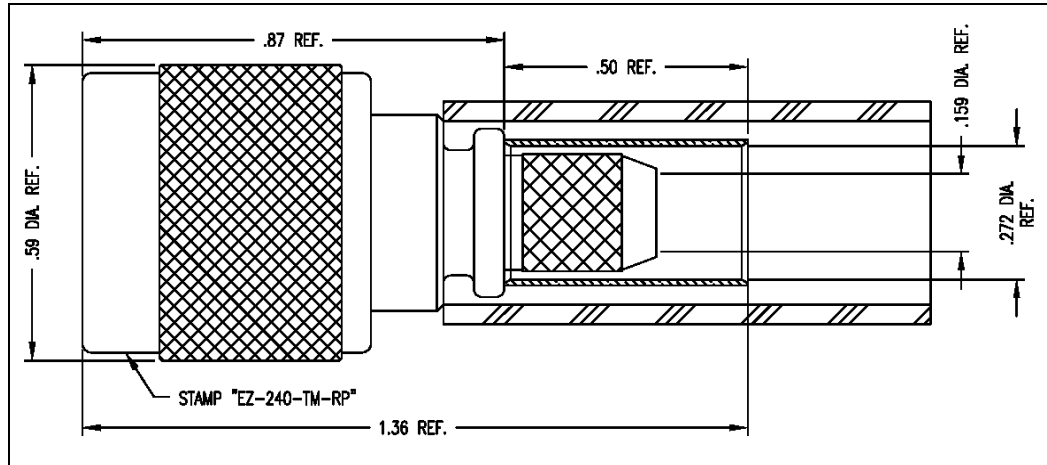

I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper - female pin
 outer contact: Alballoy Plated Brass
 coupling nut: Alballoy Plated Brass
 body: Alballoy Plated Brass
 crimp sleeve: Alballoy Plated Copper
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 shrink sleeve: Adhesive Lined Polyolefin
 crimp size: .255" hex

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 500 vrms (max)
 vswr: 1.25:1 (max) up to 6 GHz
 insertion loss: $0.1 \times \sqrt{F_{\text{ghz}}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn	JCL	5/15/00



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-240-TM-RP

TNC male Reverse Polarity (female pin)
 for LMR-240 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-970
--------	-----------------	-----------------------

Scale: NA

Rev. (-)

Sheet: 1 of 1