

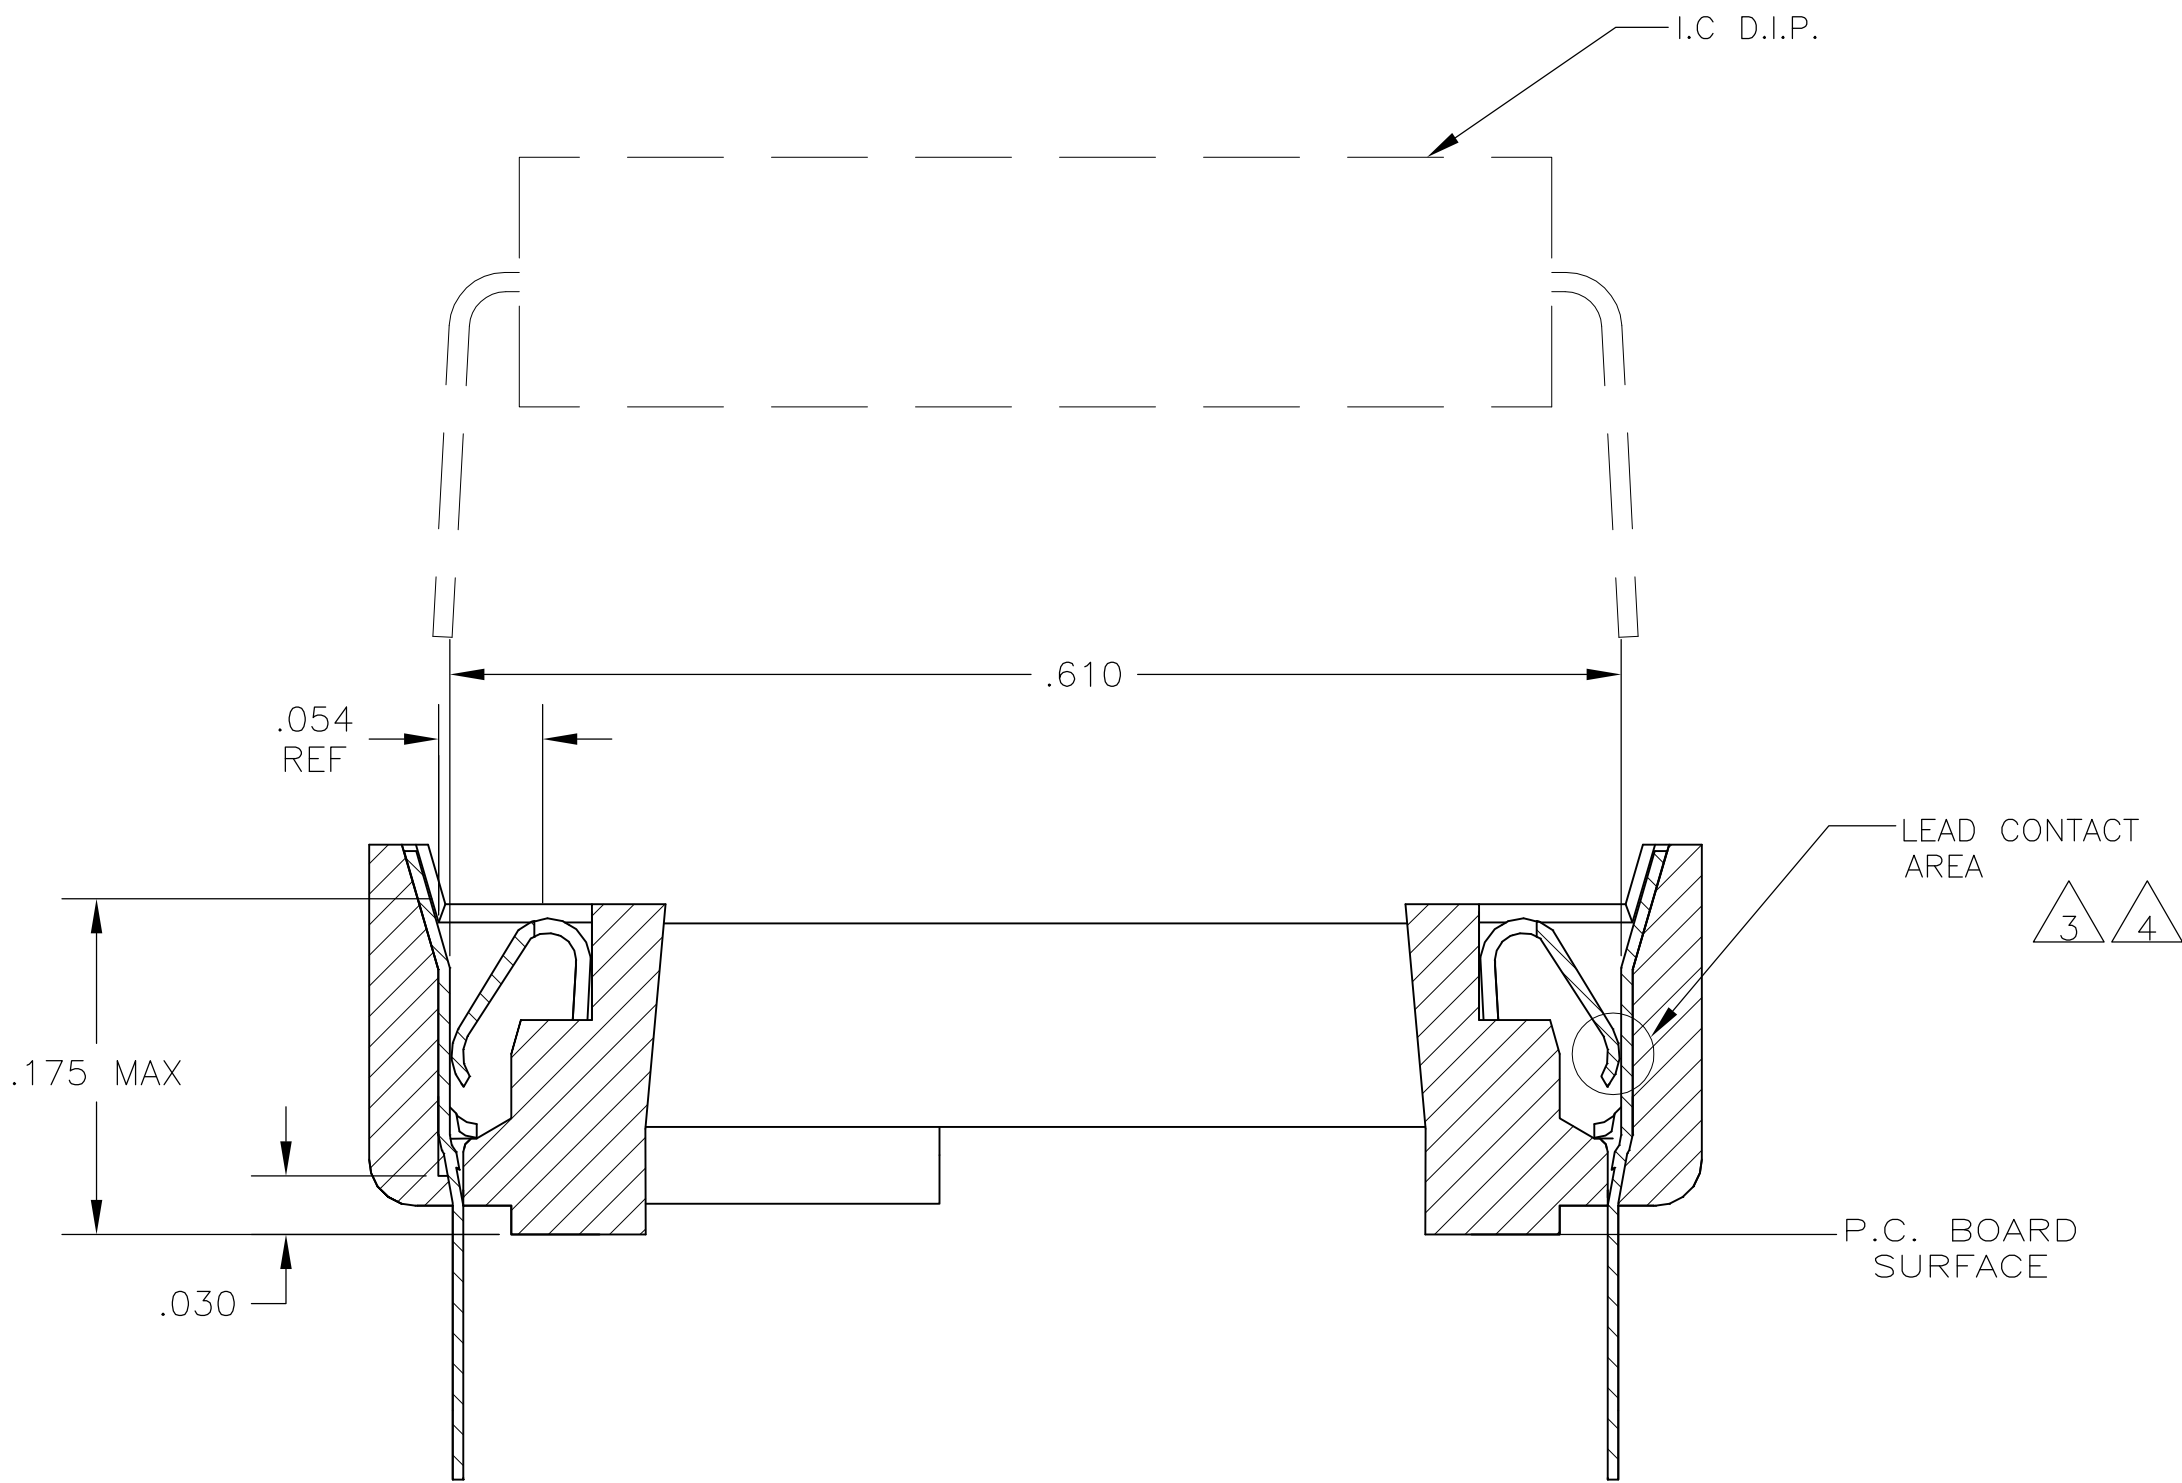
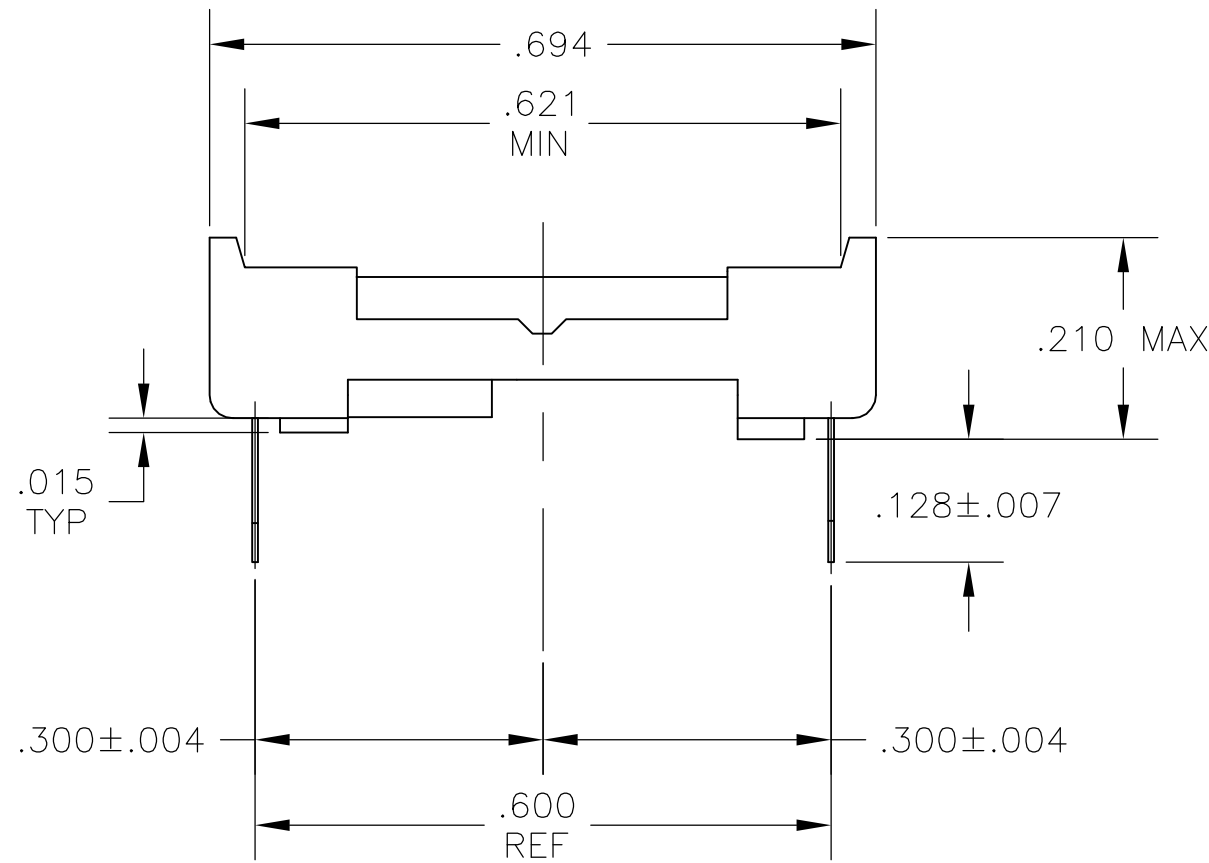
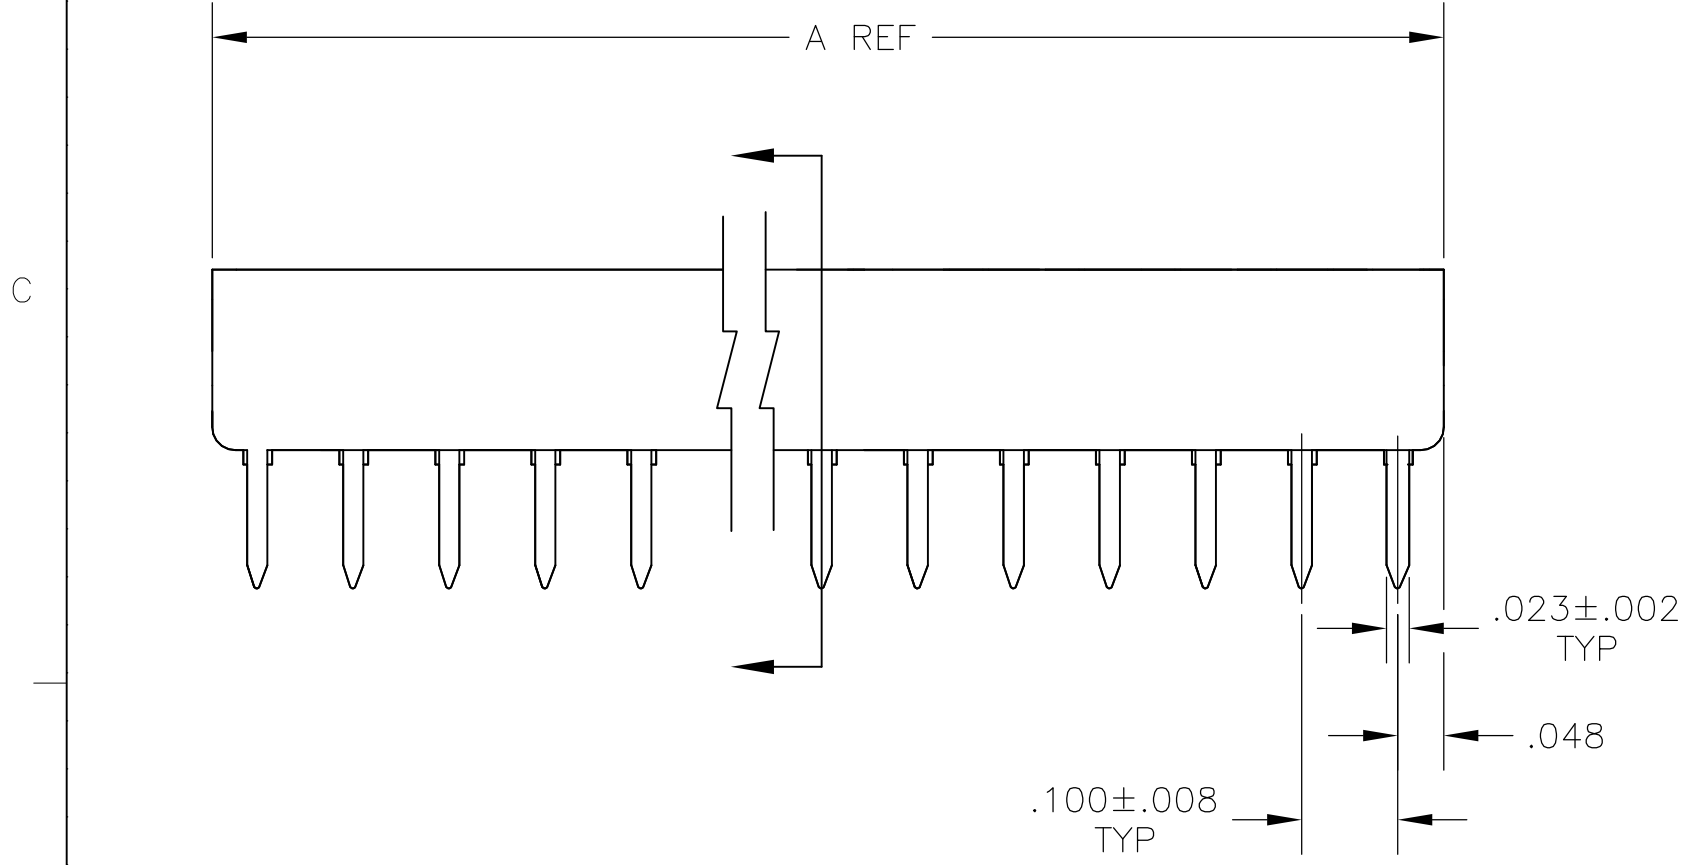


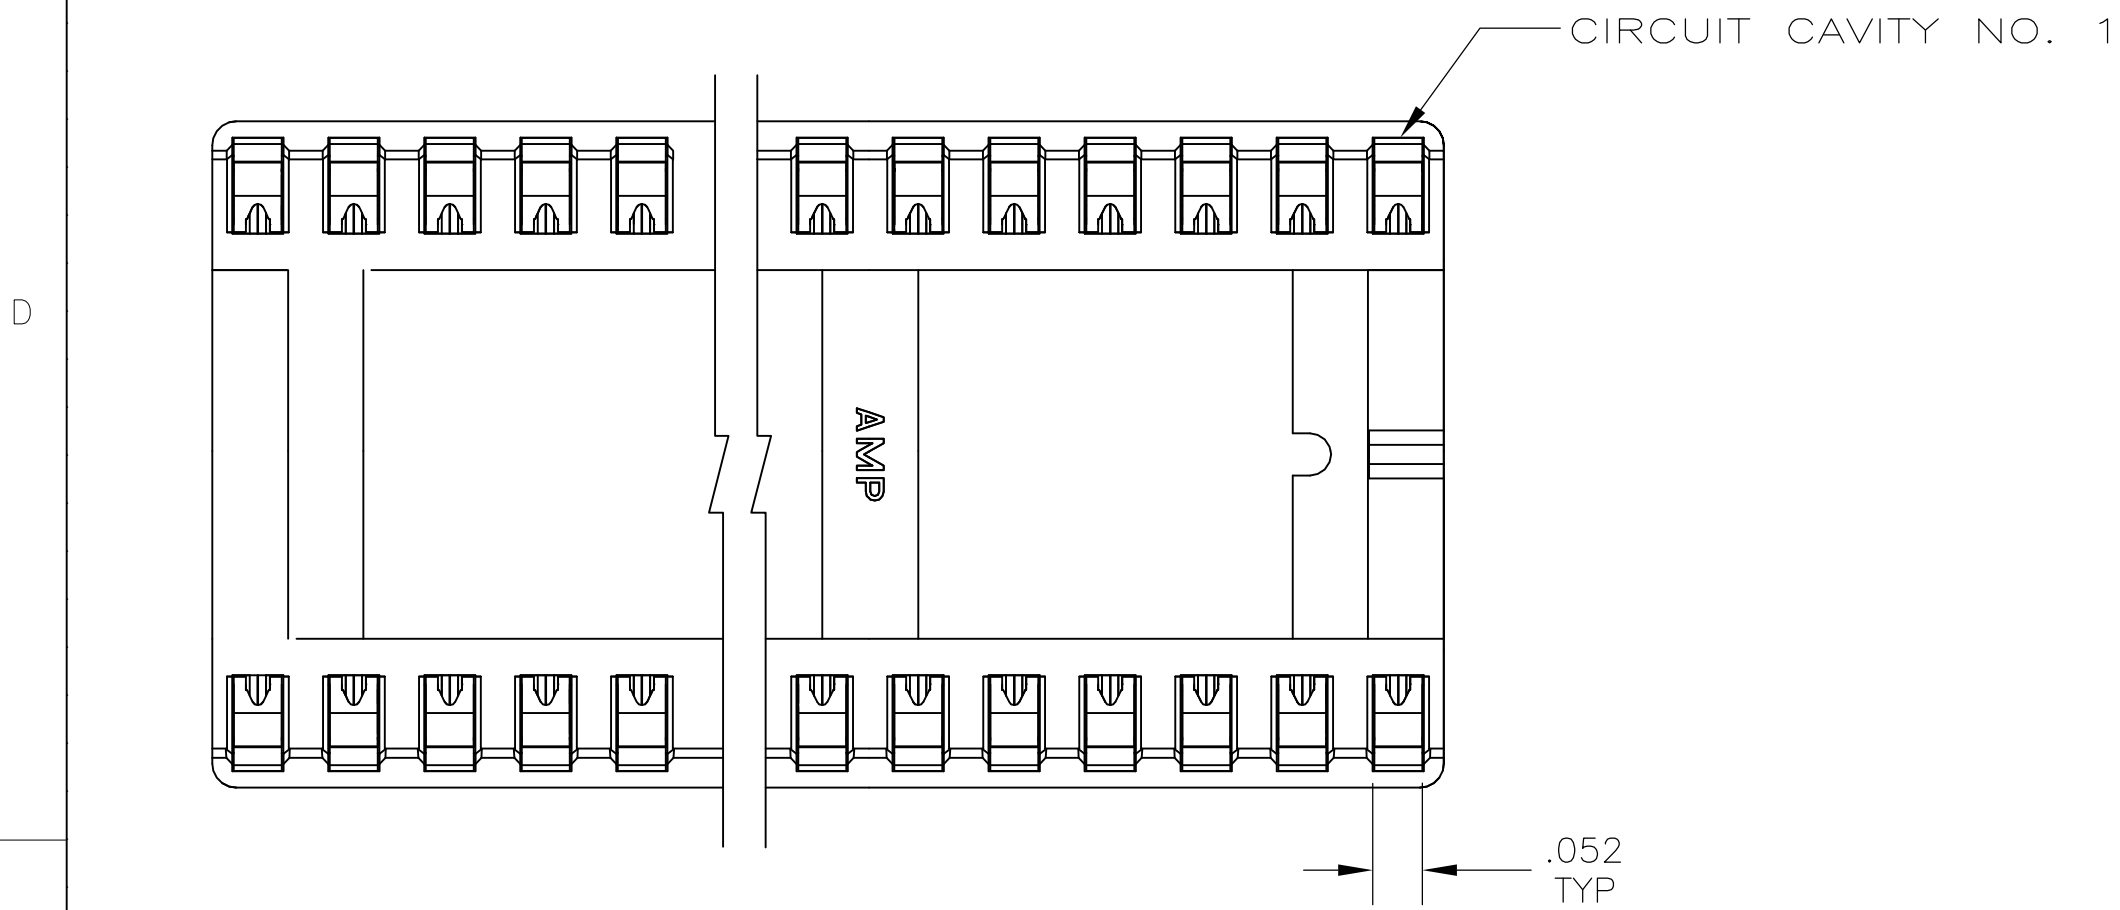

SECTION A-A
SCALE 10:1

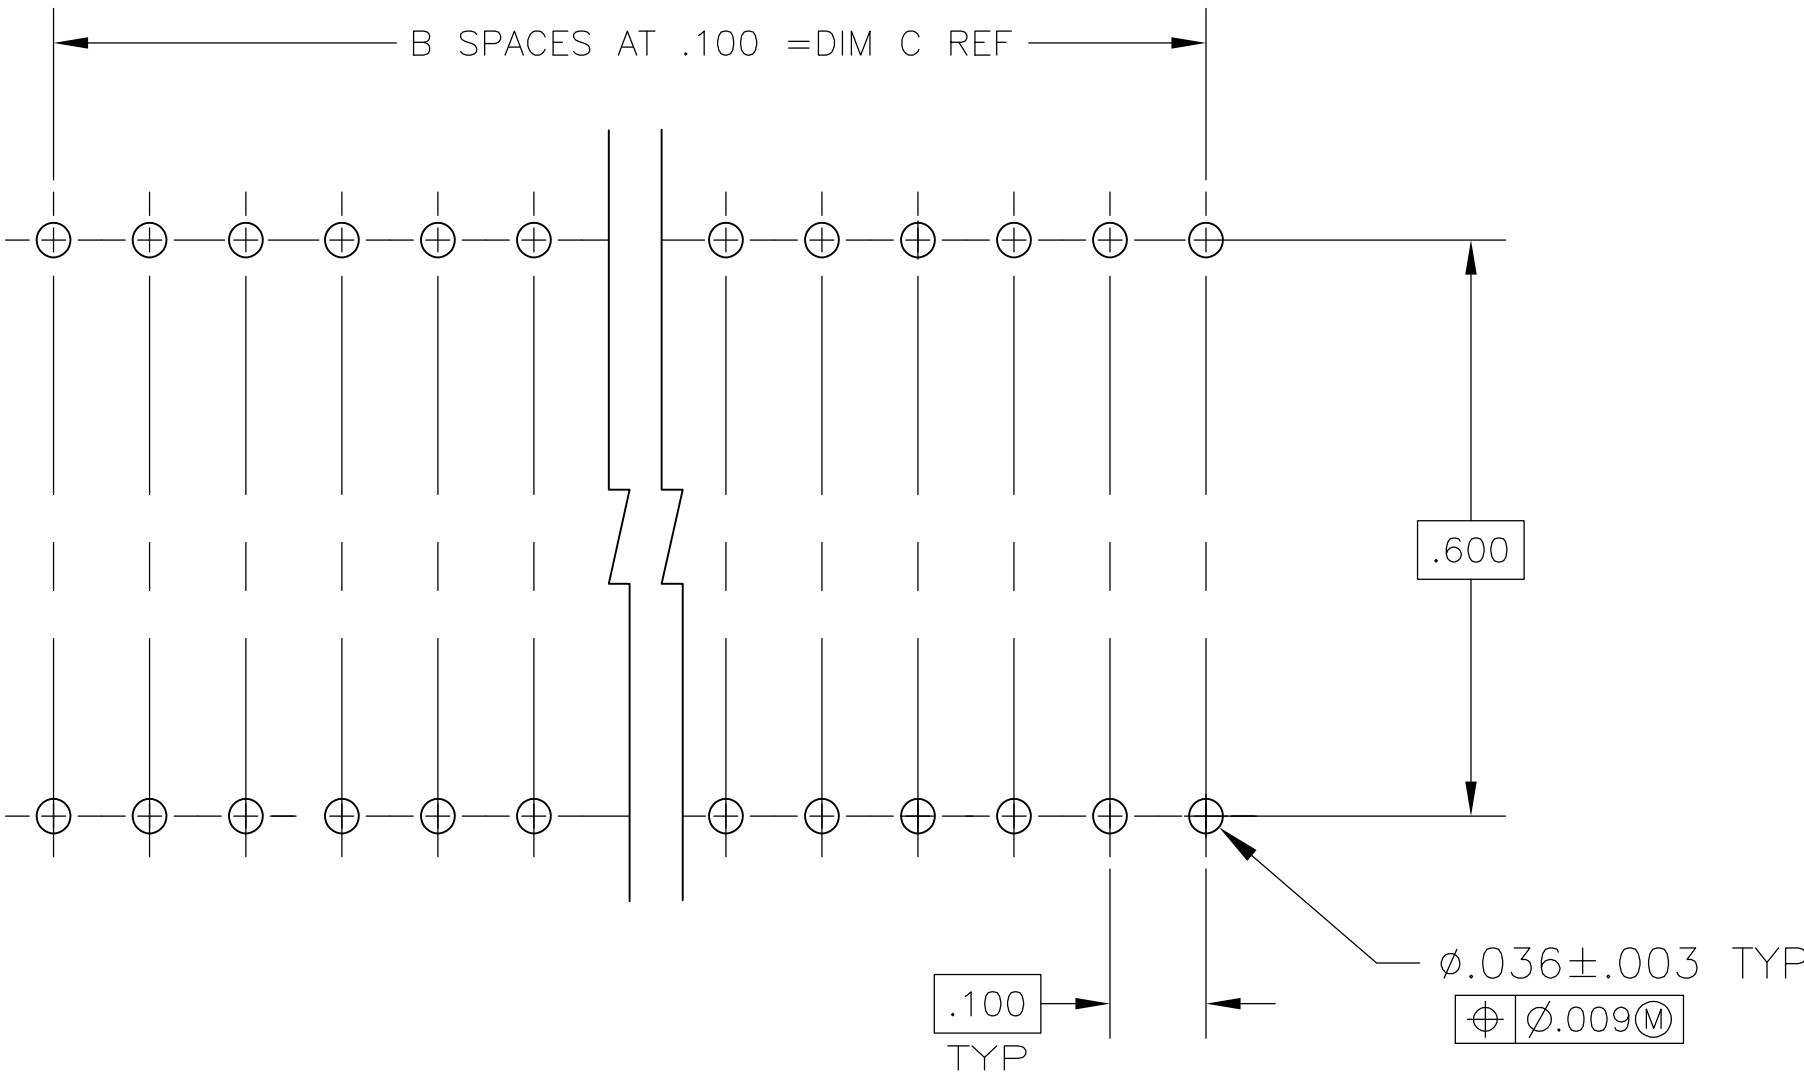

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

- 1 RECEPTACLE ACCEPTS A .008-.014 THICK I.C.LEAD.
- 2 TUBE LOADED FOR AUTOMATIC INSERTION.
- 3 BECU CONTACT -PLATED WITH TWO .000030 MIN THIK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALENCE OF CONTACT NICKEL PLATED.
- 4 PHOS. BRZ CONTACT - PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALENCE OF CONTACT NICKEL PLATED.
- 5 GLASS FILLED THERMOPLASTIC, 94V-0, BLACK

(B)	OBSOLETE	3	2.300	23	2.395	48	1-1825109-4
		3	1.900	19	1.995	40	1-1825109-3
		3	1.300	13	1.395	28	1-1825109-2
		3	1.100	11	1.195	24	1-1825109-1
(B)	OBSOLETE	4	2.300	23	2.395	48	1825109-4
		4	1.900	19	1.995	40	1825109-3
		4	1.300	13	1.395	28	1825109-2
		4	1.100	11	1.195	24	1825109-1
		CONTACT & FINISH	DIM C	B SPCS	DIM A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA	22APR05	tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK K.WRIGHT		NAME		DIP SOCKET ASSY, LADDER, DIPLOMATE, .600 CL, LEAD FREE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		PRODUCT SPEC		—	
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± 0°30'	APPLICATION SPEC		108-1066		
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT —		SIZE A1	CAGE CODE 00779	DRAWING NO C1825109
CUSTOMER DRAWING			SCALE 5:1		SHEET 1 OF 1		REV B