




RS Stock No.517-4443
 RS Stock No.517-3276
 RS Stock No.517-3333
 RS Stock No.517-3298
 RS Stock No.517-3355
 RS Stock No.517-3412
 RS Stock No.517-3260
 RS Stock No.517-4437
 RS Stock No.517-3305
 RS Stock No.517-3361
 RS Stock No.517-3383
 RS Stock No.517-3327
 RS Stock No.517-3311
 RS Stock No.517-3377
 RS Stock No.517-3399

Plain high temperature box (without seal ,no coating)

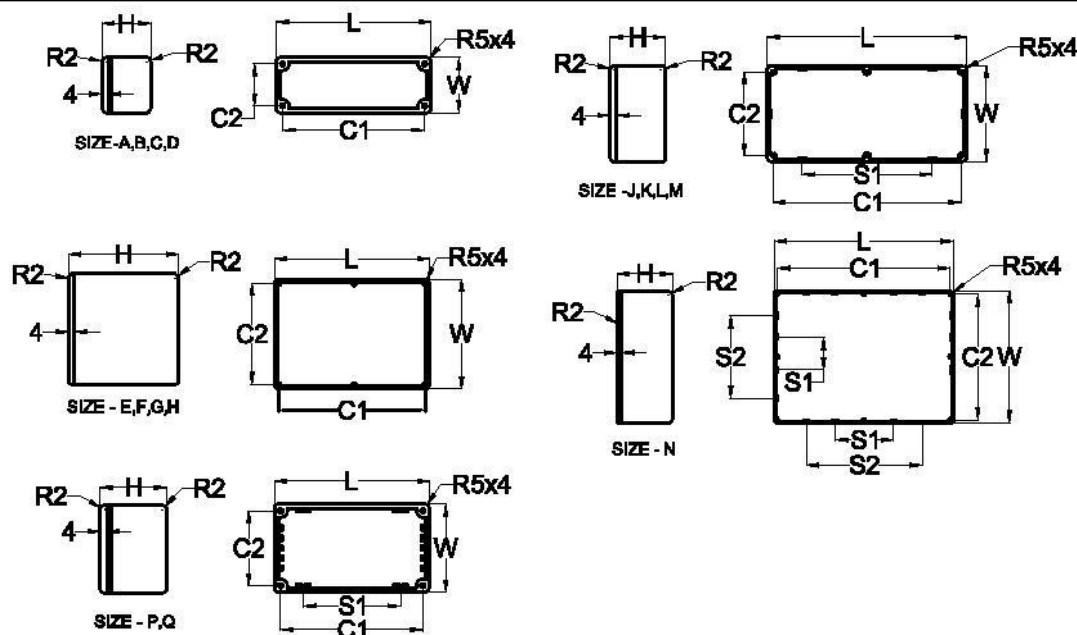

RS Stock NO.	Size NO.	L	W	H	C1	C2	S1	S2	Wall Thickness
5174443	A	89.1	35.0	30.3	79.3	25.3			1.5mm
5173276	B	114.5	63.6	30.3	104.5	54.2			1.5mm
5173333	C	114.7	89.7	55.1	104.4	79.6			1.5mm
5173298	D	114.4	63.7	55.1	104.6	54.2			1.6mm
5173355	E	172.0	120.9	55.0	160.4	109.3			2mm
5173412	F	172.1	120.9	106.0	160.4	109.3			2mm
5173260	G	222.1	145.9	55.9	211.7	135.4			2mm
5174437	H	222.2	146.0	106.5	211.7	135.4			2mm
5173305	J	275.0	175.0	65.5	264.1	164.0	132.2		2mm
5173361	K	139.1	101.5	76.7	128.7	90.7	64.8		2mm
5173383	L	165.8	127.3	76.3	154.0	116.1	77.1		2mm
5173327	M	119.9	100.0	35.7	108.5	88.4	50.1		2mm
5173311	N	250.2	250.2	100.5	238.0	238.0	79.9	160.0	2.5mm
5173377	P	79.9	54.9	25.5	70.5	45.4	40.0		1.5mm
5173399	Q	80.0	54.9	30.0	50.6	45.4	30.0		1.5mm

- 1.Material of the base and lid :Aluminium alloy ADC12
- 2.Material of the screws : Stainless M3.5x9mm Supadrive countersunk head
- 3.Finish:Natural plain
- 4.Taper 1.5° Per side lid to base