

Aluminum Electrolytic Capacitor – JMQ

FEATURES


- Warranty of 5000 hours at 105°C



SPECIFICATIONS

Items	Performance Characteristics	
Rated Voltage Range (V)	350V, 400V, 450V	
Operating Temperature Range (°C)	-40°C~+105°C	
Capacitance Tolerance (20°C,120Hz)	±20%	
Dissipation Factor (20°C,120Hz)	0.15	
Leakage current (µA)	0.01CV or 5mA, whichever is smaller. (at 20°C,after 5 minutes) C: Nominal capacitance (µF) V: Rated voltage(V)	
Load Life (+105°C)	Time	5000 hours
	Leakage Current	Not more than the specified value.
	Capacitance Change	Within±15% of the initial value
	Dissipation Factor	Not more than 175% of the specified value.
Shelf Life (+85°C)	Time	1000 hours
	Leakage Current	Not more than the specified value.
	Capacitance Change	Within ±15% of the initial value
	Dissipation Factor	Not more than 175% of the specified value.
After Test: U _R to be applied for 30 minutes, 12 to 24 hours before measurement		

DIMENSIONS (mm)

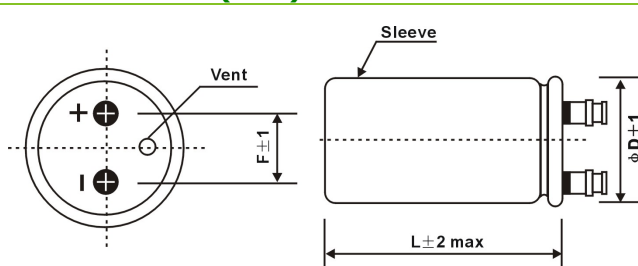

ΦD	51	64	77	90
F	22	28.6	32	32

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency(Hz)	50,60	120	300	1K	≥10K
Factor	0.7	1.0	1.1	1.3	1.4

Temperature coefficient

Temperature(°C)	+40	+60	+70	+85	+1085
Factor	3.8	3.0	2.5	2.0	1.00

Please visit our website to get more update data, those data & specification are subject to change without notice.

Aluminum Electrolytic Capacitor – JMQ

CASE CODE (mm)

L D	53	64	65	75	83	96	100	105	109	115	121	130	131
36	A5	--	A6	--	A8	--	A10	--	--	--	A12	--	--
51	--	C7R	--	C8R	C8	C10R	C10	--	C11	C12R	X12	C13R	--
64	--	--	--	--	--	D10R	D10	D11	--	D12R	D12	D13R	--
77	--	--	--	--	--	E10R	--	--	--	E12R	E12	E13R	--
90	--	--	--	--	--	--	--	--	--	--	--	--	F13R
101	--	--	--	--	--	--	--	--	--	--	--	--	--

L D	144	145	155	157	160	161	171	175	195	196	236	237
36	--	--	--	--	--	--	--	--	--	--	--	--
51	--	--	--	--	--	--	--	--	--	--	--	--
64	D15	--	D16R	--	--	--	--	--	D20R	--	--	--
77	E15	--	E16R	--	E16	--	E17R	--	E20R	--	--	--
90	--	F15	--	F16R	--	F16	F17R	--	--	F20R	F24R	--
101	--	--	--	--	--	--	--	G18R	--	G20R	--	G24R

CASE CODE (mm)

Cap	WV SV (V)	350 400	400 450	450 500
1000		C8R 3.9	C8R 3.9	C10R 4.2
1200		C8R 4.2	C10R 4.6	C12R 5.0
1500		C10R 5.2	C12R 5.6	C13R 5.9
1800		C10R 5.7	C13R 6.4	D10R 6.3
2200		C13R 7.1	D10R 6.9	D12R 7.4
2700		D10R 7.7	D12R 8.2	D13R 8.6
				E12R 8.7
3300		D12R 9.1	D13R 9.5	D16R 10.2
				E13R 10.1
3900		D13R 10.4	D16R 11.1	D20R 12.3
			E12R 10.4	
4700		D16R 12.2	D20R 13.4	E16R 12.9
		E12R 11.5	E13R 12.0	
5600		D20R 14.6	D20R 14.6	E20R 15.4
		E13R 13.1	E16R 14.0	F16R 14.9
6800		E16R 15.5	E16R 16.5	F20R 18.0
8200		F16R 18.1	F16R 18.1	F20R 19.8
10000		F16R 19.9	F20R 21.7	F24R 23.6
12000		F20R 23.8	F24R 25.8	-- --
15000		F24R 28.8	-- --	-- --

Ripple Current (Arms) 105°C 120Hz

Case code

Please visit our website to get more update data, those data & specification are subject to change without notice.