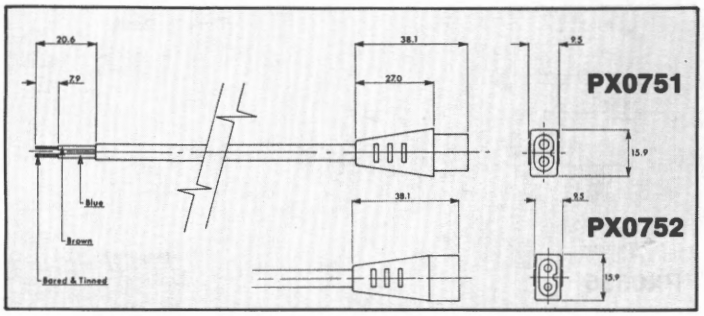

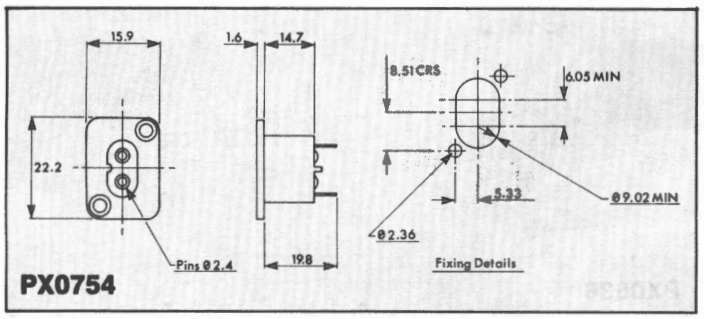

Materials:-
Mouldings: PX0751, PX0752 - PVC. **PX0754** - Glass filled nylon.
Contacts: Brass tin plated.

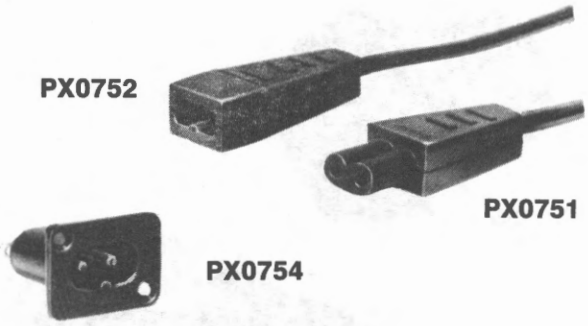

- 2 Pole
- **PX0751** mates with **PX0752 & PX0754**
- **PX0751** & **PX0752** are supplied with 1M of black cable "moulded-in".

Connection: PX0754 Solder tags.
Max. Rating: 6A. 120V.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^4$ M Ω.
A.C. Breakdown: PX0751-8KV. **PX0752** - 6KV. **PX0754** - 4KV.
Operating Temperature: -20°C to +60°C.

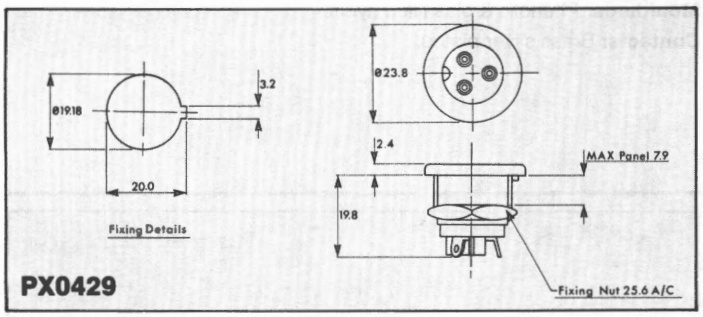

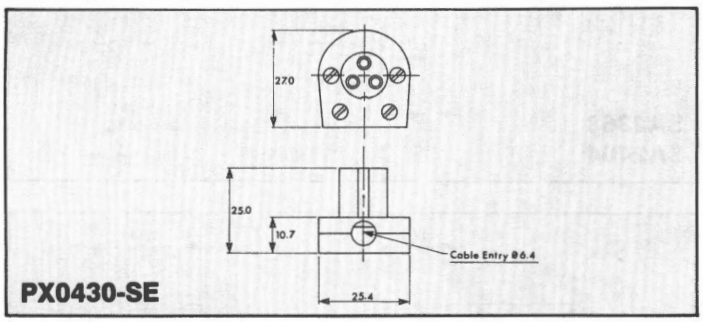

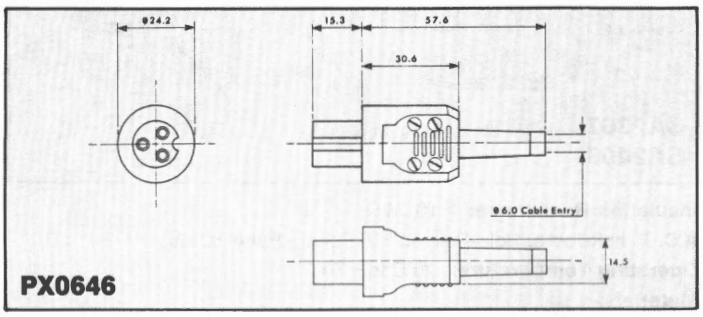

Materials:-
Mouldings: PX0429 Glass filled nylon & Phenolic. **PX0430/SE, PX0646** Nylon & glass filled nylon.
Contacts: PX0429 Pins brass hot tin dipped. **PX0430/SE & PX0646** Sockets brass silver plated.

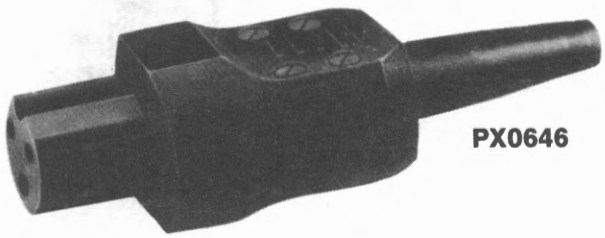

- 2 Pole + Earth.
- **PX0429** mates with **PX0430-SE & PX0646**

Connection: Solder tags.
Max. Rating: 2.5A. 250V. a.c.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^5$ M Ω.
A.C. Breakdown: Pole-Pole 4.5KV. Pole-Panel 8.5KV.
Operating Temperature: -20°C to +60°C.

GENERAL PURPOSE

Plugs & Sockets

PX0635

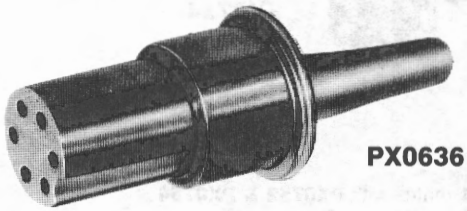

PX0636

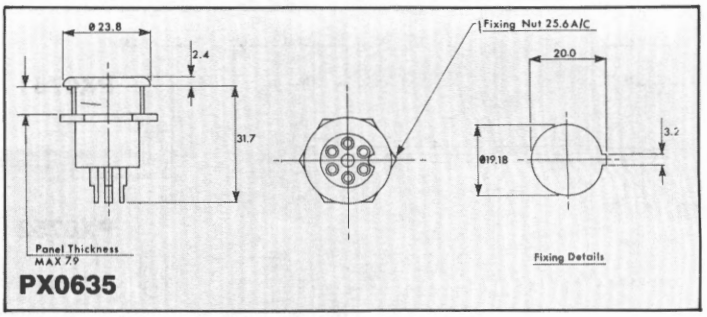

PX0635

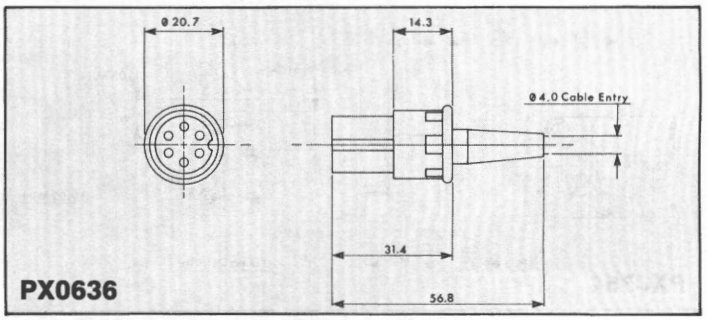

PX0636

- 6 Pole
- **PX0635** mates with **PX0636**

Connection: Solder tags.
Max. Rating: 3A. 50V. a.c.
Contact Resistance: <10m Ω.

Insulation Resistance: >10^4 M Ω.
A.C. Breakdown: Pole-Pole 2.1KV. Poles-Panel 10KV.
Operating Temperature: -20°C to 60°C.
Materials:-
Mouldings: Phenolic & glas filled nylon.
Contacts: Brass silver plated.

SA2404
SA2368



SA2403
SA2367

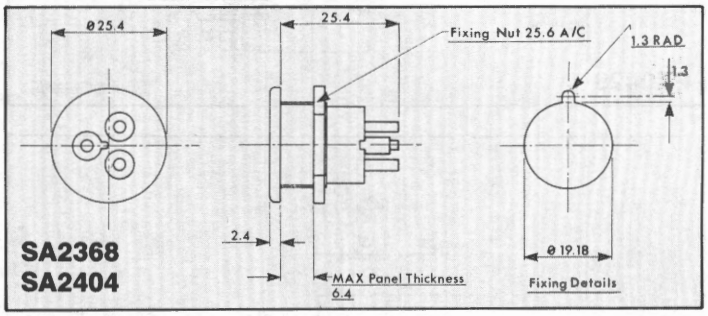

SA2368
SA2404

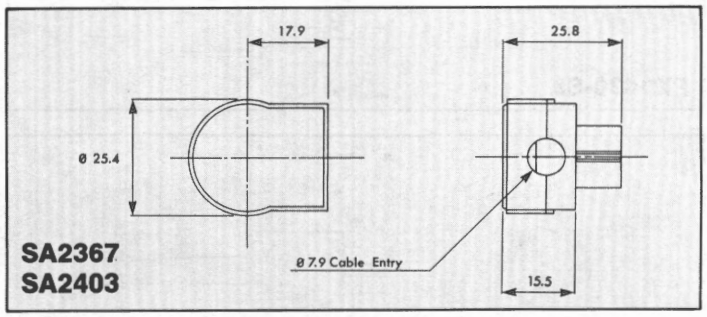

SA2367
SA2403

- 3 Pole **SA2404** mates with **SA2403**
- 4 Pole **SA2368** mates with **SA2367**

Connection: SA2368, SA2404 Solder tags.
SA2367, SA2403 Screw terminals
Max. Rating: 2A. 250V. a.c./d.c.
Contact Resistance: <10m Ω.

Insulation Resistance: >10^4 M Ω.
A.C. Breakdown: Pole-Pole 4.2KV. Poles - Panel 8.2KV.
Operating Temperature: -20°C to +70°C.
Materials:-
Mouldings: Glass filled nylon.
Contacts: Pins/Terminals Brass nickel plated. Sockets Brass tin plated.

☎ 01 594 5588 Telex: 897255 Fax: 01 591 6913

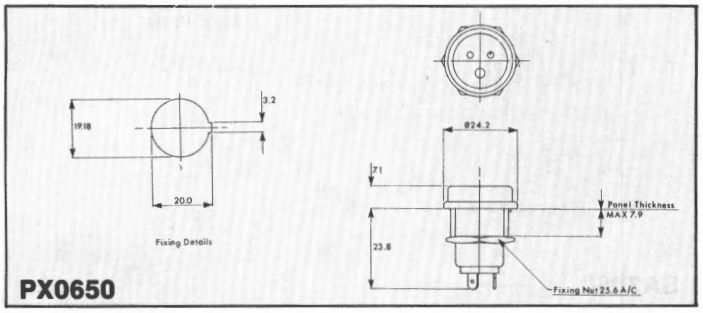

PX0650

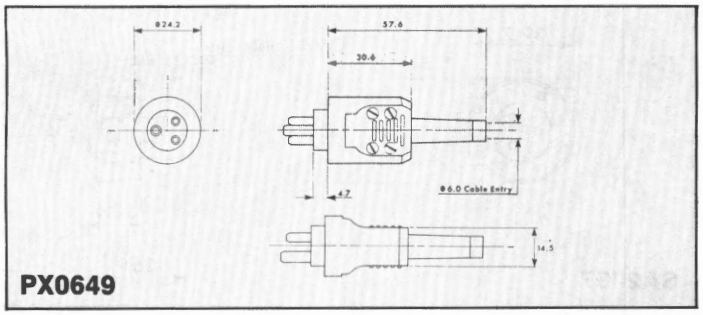

PX0649

A.C. Breakdown: Pole-Pole 4.2KV. Poles-Panel 10KV.
Operating Temperature: -20°C to +60°C.
Materials:-
Mouldings: Glass filled nylon, Nylon & Phenolic.
Contacts: Brass - Pins hot tinned dipped, sockets silver plated.

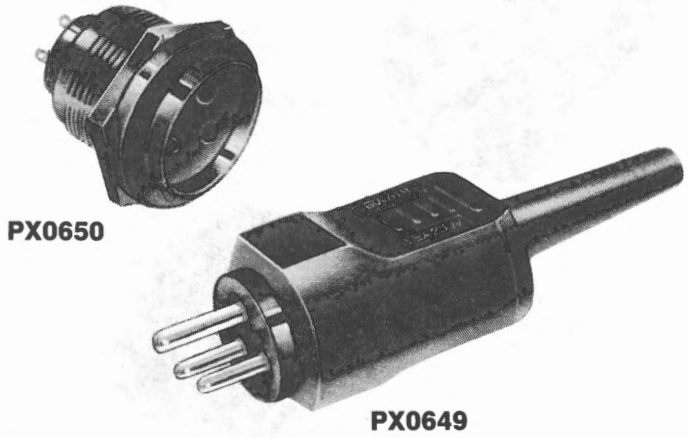

PX0650

PX0649

- 2 Pole + Earth.
- **PX0650** mates with **PX0649.**

Connection: Solder tags.
Max. Rating: 2.5A. 250V. a.c.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^4$ M Ω.

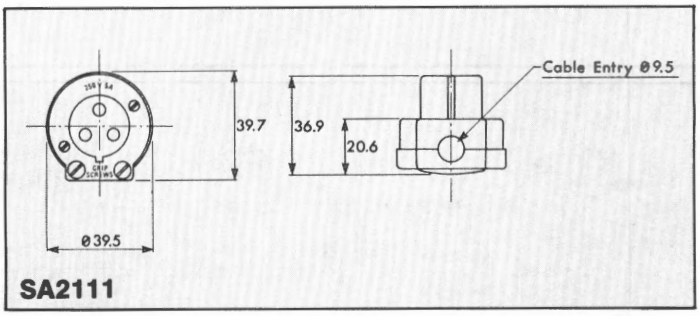

SA2111

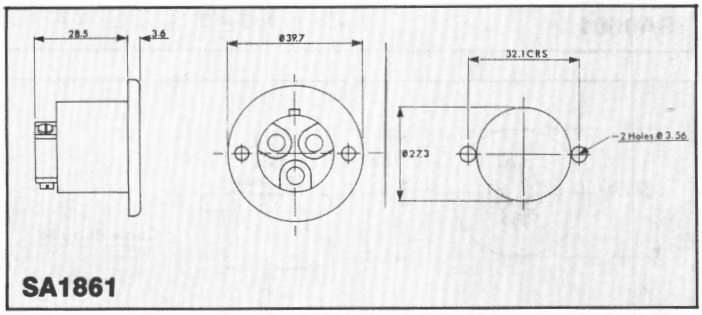

SA1861

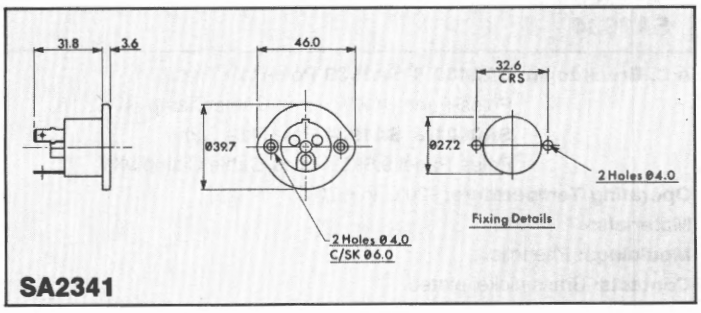

SA2341



SA2111

SA2341



SA1861

- 2 Pole + Earth.
- **SA2111** mates with **SA1861 & SA2341**

Connection: SA2111,SA1861 Screw terminals
SA2341 6.3 Series tabs.
Max. Rating: 5A. 250V. a.c.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^4$ M Ω.
A.C. Breakdown: Pole-Pole 4.6KV. Pole-Panel 9.2KV.
Operating Temperature: -20°C to +70°C.
Materials:-
Mouldings: Phenolic.
Contacts: Brass Sockets/Pins & terminals nickel plated, tags tin plated.

GENERAL PURPOSE

Plugs & Sockets

SA2096

SA2097

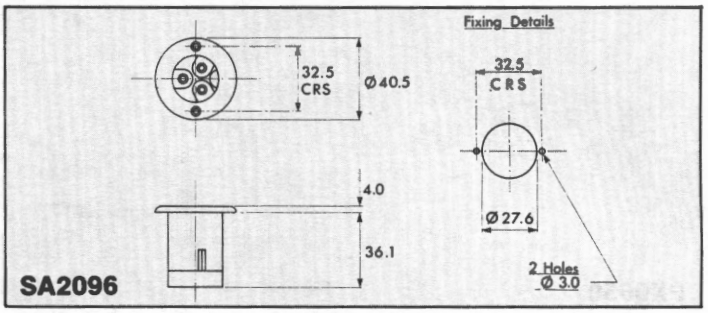

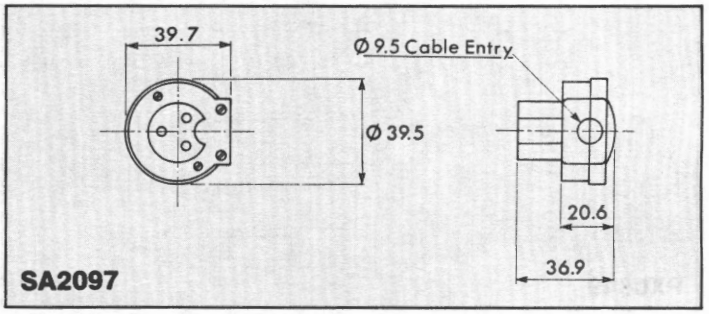

- 2 Pole + Earth.
- **SA2097** mates with **SA2096.**

Connection: Screw Terminals.
Max. Rating: 5A. 250V. a.c.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^4$ M Ω.

A.C. Breakdown: Pole-Pole 3.4KV. Pole-Panel 9.6KV.
Operating Temperature: -20°C to +70°C.
Materials:-
Mouldings: Phenolic.
Contacts: Brass nickel plated.



SA1933
SA1934



SA0480
SA0601

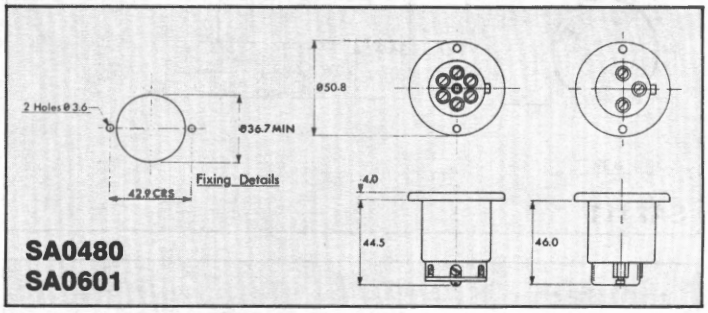

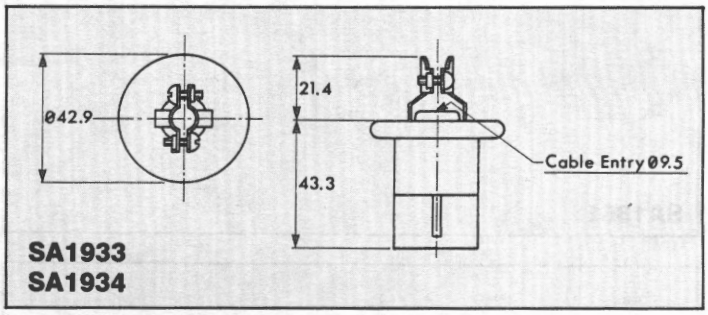

- 2 Pole + Earth **SA0480** mates with **SA1933.**
- 6 Pole **SA0601** mates with **SA1934.**

Connection: Screw terminals.
Max. Rating: 7A. 250V. a.c.
Contact Resistance: <10m Ω.
Insulation Resistance: $>10^4$ M Ω.

A.C. Breakdown: SA0480 & SA1933 Pole-Pole 7.4KV.
Poles-Panel 10KV. Poles-Cable Clamp 5KV.
SA0601 & SA1934 Pole-Pole 3.2KV.
Poles-Panel 9.6KV. Poles-Cable Clamp 9KV.
Operating Temperature: -20°C to +70°C.
Materials:-
Mouldings: Phenolic.
Contacts: Brass nickel plated.

☎ 01 594 5588 Telex: 897255 Fax: 01 591 6913

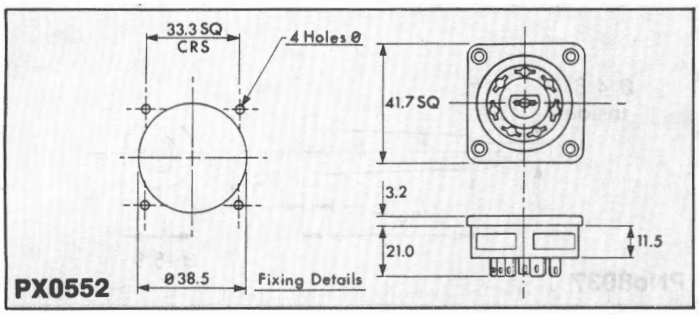

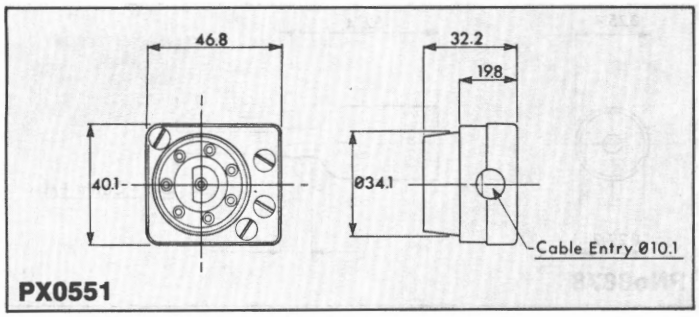



PX0552



PX0551

Insulation Resistance: $>10^3$ M Ω.
A.C. Breakdown: Pole-Pole 5.2KV. Poles-Panel 6.6KV.
Operating Temperature: -20°C to +70°C.
Materials:-
Mouldings: Glass filled nylon.
Contacts: Brass, **PX0551** nickel plated, **PX0552** silver plated.

- 8 Pole.
- **PX0552** mates with **PX0551**

Connection: PX0552, 4.8 Series tabs.
PX0551 Screw terminals.
Max. Rating (per pin): 6A. 250V. a.c.
Contact Resistance: <20m Ω.

Accessories for General Purpose Plugs & Sockets

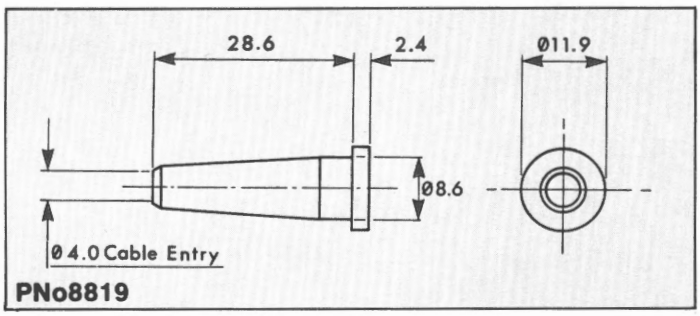

PNo8819 PVC cable sleeve fitted to **PX0636**
Temperature Range: -20°C to + 60°C.

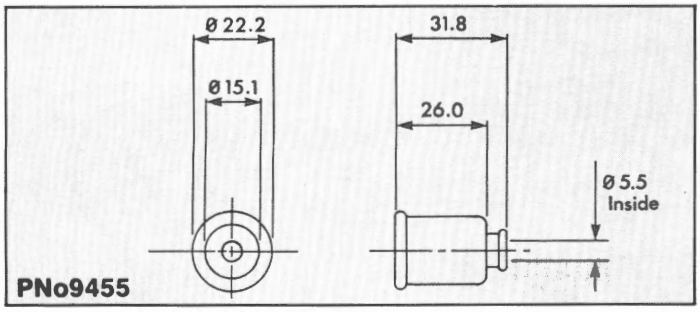



PNo9455 PVC insulation cover fits **PX0429, PX0635, PX0650, SA2368** & **SA2404**
Temperature Range: -20°C to + 60°C.

GENERAL PURPOSE

Plugs & Sockets



PNo8037 PVC cable sleeve fits **SA1933, SA1934**
Temperature Range: -20°C to + 60°C.



PNo8878 PVC insulation cover fits **SA1861** & **SA2341**
Temperature Range: -20°C to + 60°C.

PNo10936 PVC cable sleeve fitted to **PX0649** & **PX0646**
Temperature Range: -20°C to + 60°C.

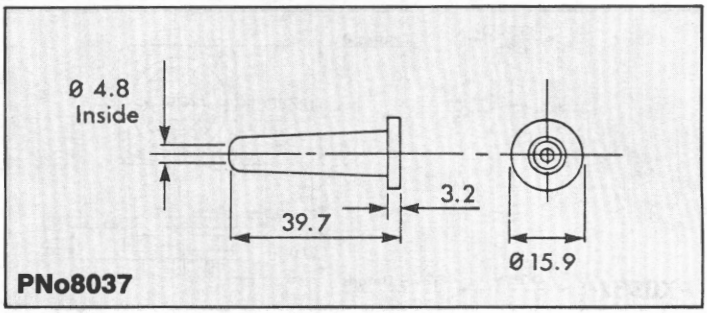

PNo8037

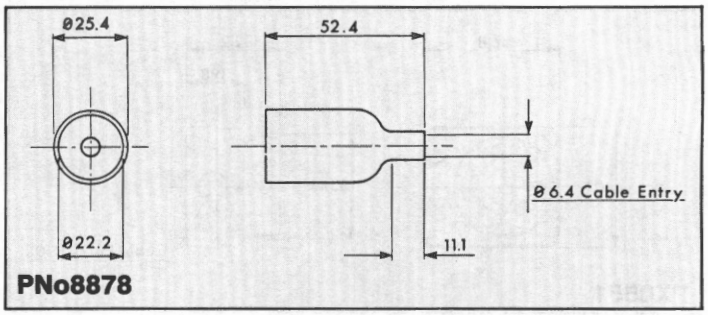

PNo8878

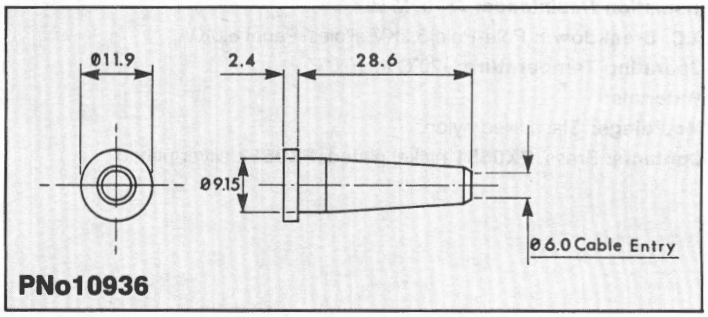

PNo10936

☎ 01 594 5588 Telex: 897255 Fax: 01 591 6913