


Plug Protection Cover

MC25042

MS25042

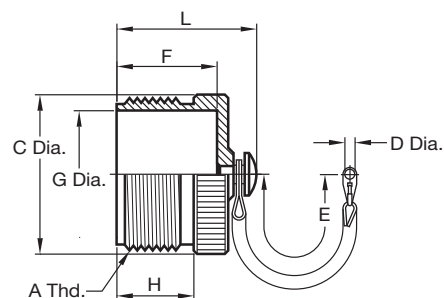


Units : mm

Dash No.	Connector Shell Size	A Thread Class 2A	C Dia. Max.	D Dia. +0.25 -0.12	E ±One Link	F	G Dia.	H Max.	L Max.
-10	10S, 10SL	5/8-24UNEF	17.44	3.96	101.6	14.27	11.91	9.66	24.61
-14	14S, 14	7/8-20UNEF	23.79	3.96	120.0	19.05	17.48	16.01	29.36
-16	16S, 16	1-20UNEF	26.97	3.96	120.0	19.05	20.62	16.01	29.36
-18	18	1 1/8-18UNEF	30.14	3.96	120.0	19.05	23.83	16.01	29.36
-20	20	1 1/4-18UNEF	33.32	4.75	127.0	19.05	26.97	16.01	29.36
-22	22	1 3/8-18UNEF	36.49	4.75	127.0	19.05	30.18	16.01	29.36
-24	24	1 1/2-18UNEF	39.67	4.75	139.7	19.05	33.32	16.01	29.36
-28	28	1 3/4-18UNEF	46.02	4.75	196.8	19.05	38.89	16.01	29.36
-32	32	2-18UNS	52.37	5.54	196.8	19.05	45.24	16.01	29.36
-36	36	2 1/4-16UN	58.72	5.54	196.8	19.05	50.80	16.01	29.36

Receptacle Protection Cover

MC25043

MS25043

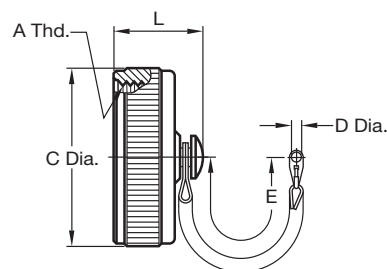

Units : mm

Dash No.	Connector Shell Size	A Thread Class 2B	C Dia. Max.	D Dia. +0.25 -0.12	E ±One Link	L Max.
-10	10S, 10SL	5/8-24UNEF	20.70	3.56	101.6	24.61
-14	14S, 14	7/8-20UNEF	28.57	3.56	120.0	29.36
-16	16S, 16	1-20UNEF	30.17	3.56	120.0	29.36
-18	18	1 1/8-18UNEF	34.13	3.56	120.0	29.36
-20	20	1 1/4-18UNEF	37.31	3.56	127.0	29.36
-22	22	1 3/8-18UNEF	40.48	3.56	127.0	29.36
-24	24	1 1/2-18UNEF	43.66	4.34	139.7	29.36
-28	28	1 3/4-18UNEF	50.01	4.34	196.8	29.36
-32	32	2-18UNS	56.36	4.75	196.8	29.36
-36	36	2 1/4-16UN	62.71	4.75	196.8	29.36