

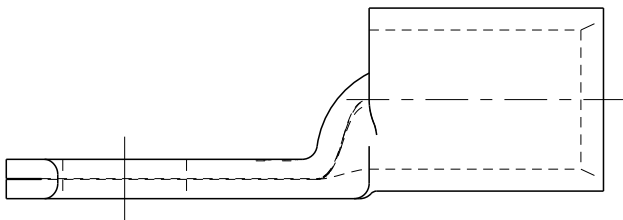
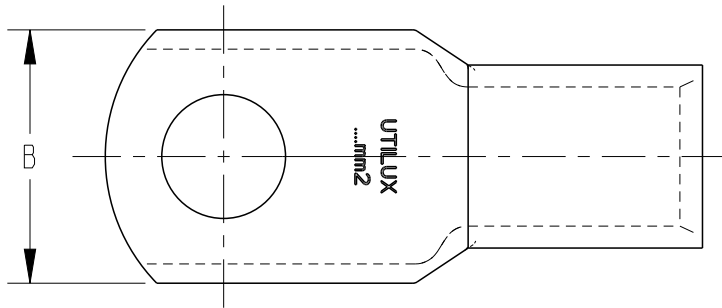


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

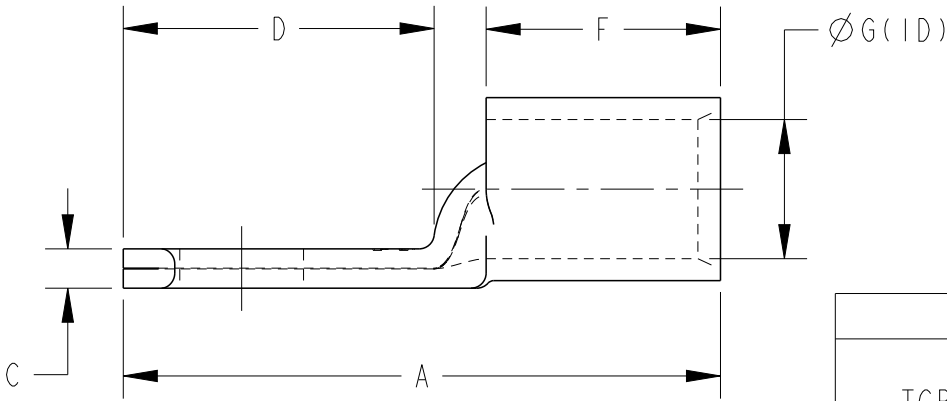

PROFILE WITH WINDOW
FOR 185mm² AND BELOW

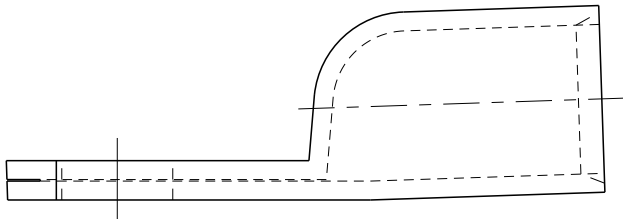

PROFILE WITHOUT WINDOW
FOR 240mm² AND ABOVE

PRODUCT SELECTION INFORMATION

TCPN	CATALOGUE NUMBER	COND. AREA (mm ²)	CONDUCTOR STRANDING	STUD SIZE	DIMENSION (mm)						CRIMPING DIE
					A	B	C	D	F	G	
979548-000	CG70M11	70	19/2.14	M11	56	22.2	4.7	26	23	11.2	38-130CU
037906-000	CG70M12	70	19/2.14	M12	56	20.6	3.2	26	23	11	38-115CU
478524-000	CG70M16	70	19/2.14	M16	56	27.5	2.4	26	22	11	38-115CU
160830-000	CG70M20	70	19/2.14	M20	75.5	28.6	3.5	43.1	25.4	11.2	38-142CU
866974-000	CG80M10	80	37/0.64	M10	56.8	22.2	4	26	23.8	11.82	38-127CU
041794-000	CG80M12	80	37/0.64	M12	56.8	22.2	4	26	23.8	11.82	38-127CU
CM9762-000	CG80M16	80	37/0.64	M16	56.8	22.2	4	26	23.8	11.82	38-127CU
557242-000	CG95M6	95	37/1.78	M6	60	25.4	4	26	27	13.4	38-142CU 40-142CU
476602-000	CG95M8	95	37/1.78	M8	60	25.4	4	26	27	13.4	38-142CU 40-142CU
478494-000	CG95M12	95	37/1.78	M12	60	25.4	4	26	27	13.4	38-142CU 40-142CU
294124-000	CG95M16	95	37/1.78	M16	75.5	27	3.7	43.1	25.4	13.4	38-142CU 40-142CU
666802-000	CG95M20	95	37/1.78	M20	75.5	28.6	3.5	43.1	25.4	13.4	38-142CU 40-142CU
D95473-000	CG120M8	120	37/2.03	M8	69	30	4.8	30	31	15.5	38-165CU, 40-165CU
152376-000	CG120M10	120	37/2.03	M10	69	30	4.8	30	31	15.5	38-165CU, 40-165CU
623338-000	CG120M12	120	37/2.03	M12	69	30	4.8	30	31	15.5	38-165CU, 40-165CU
911176-000	CG120M16	120	37/2.03	M16	69	30	4.8	30	31	15.5	38-165CU, 40-165CU
024890-000	CG120M20	120	37/2.03	M20	69	30	4.8	30	31	15.5	38-165CU, 40-165CU
650302-000	CG150M10	150	37/2.25	M10	78	33.5	5.4	40	27	16.3	38-183CU, 40-185CU
292494-000	CG150M12	150	37/2.25	M12	78	33.5	5.4	40	27	16.3	38-183CU, 40-185CU
854522-000	CG150M16	150	37/2.25	M16	78	33.5	5.4	40	27	16.3	38-183CU, 40-185CU
858384-000	CG150M20	150	37/2.25	M20	78	33.5	5.4	40	27	16.3	38-183CU, 40-185CU
346062-000	CG160M12	160	37/0.93	M12	78	31.8	5.2	40	27	16.94	38-183CU
957012-000	CG160M20	160	37/0.93	M20	78	31.8	5.2	41.3	27	16.94	38-183CU
609382-000	CG185M10	185	37/2.52	M10	82	36.5	5.2	40	31	18.4	38-200CU, 40-200CU
379798-000	CG185M12	185	37/2.52	M12	82	36.5	5.2	40	31	18.4	38-200CU, 40-200CU

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN RAVI.S 04DEC2020
CHK S.CHAD 04DEC2020
APVD M.FRATER 04DEC2020
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -



TE Connectivity

NAME COPPER CRIMP LUGS

SIZE A3 CAGE CODE 00779 DRAWING NO. C-E00001137 RESTRICTED TO -

CUSTOMER DRAWING SCALE NTS SHEET 4 OF 6 REV A