



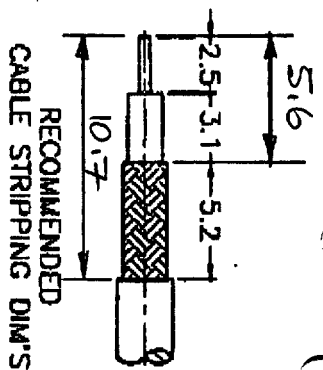


ISS	ZONE	REVISIONS	DESCRIPTION \ APPROVED \ DATE

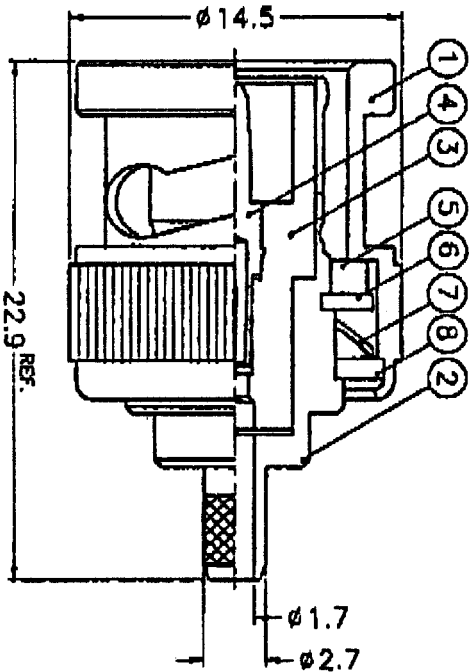

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626, ALDLY 360, 1/2 H
 2. BRASS PER QQ-B-613, COUP 260, HARD TEMP
 3. NICKEL PL 100 MIN. OVER COPPER PL 50 MIN.
 4. SILVER PL 80 MIN. OVER COPPER PL 50 MIN.
 5. PHOSPHOR BRONZE PER QQ-B-750, COUP A, 1/2 H
 6. GOLD PL 100 MIN. OVER NICKEL PL 50 MIN.
 7. OVER COPPER PL 50 MIN.
 8. SILVER PL 100 MIN. OVER NICKEL PL 50 MIN.
 9. OVER COPPER PL 50 MIN.
 10. DELRIM 500F (B1121G1-3-50)
 11. TEFION MIL-P-19468 (B1121G1-31-50)



NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.
1	FERRULE	NOTE 1	NOTE 3	1	BS0003-10-39\
2	CONTACT PIN	NOTE 1	NOTE 5	1	BS0003-9-06
3	WASHER	NOTE 2	NOTE 3	1	BS0000-7
4	SPRING	SKS	NOTE 3	1	BS0000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	BS0000-5
6	GASKET	SILICONE	RED	1	BS0000-4
7	CONTACT PIN	NOTE 4	NOTE 5	1	B1121G1-4-1.05
8	INSULATOR	NOTE 6	NATURAL	1	NOTE 8
9	BODY	NOTE 1	NOTE 3	1	B1121G1-2-27\
10	SHELL	NOTE 1	NOTE 3	1	BS0000-1-8

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES

0.5-6 = ±0.2
6-50 = ±0.4
50-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.

APPROVED

CHECKED

DATE

10-13-95

DATE

DATE




KAI JACK INDUSTRIAL CO., LTD.
TAIWAN TAIWAN R.O.C.

TITLE
BNC CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO.

KJ-B1121G1-316U-50

FILE NO. FADMG/01121G1/316U-50

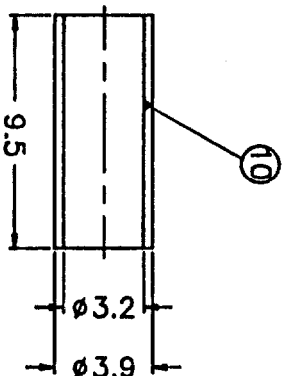[illegible]

DRAWING NO.

KJ-B50003-316/U

TABLE:

BNC CRIMP PLUG



modular systems

**P.O. Box 38-828
PETONE, Wellington**