

MATERIALS AND FINISHES

BODY BRASS
PLATED NICKEL

CENTER CONTACT BRASS
PLATED GOLD (10u")

INSULATOR POLYPROPYLENE

WASHER , RETAINING RING BRASS
PLATED NICKEL

COUPLING NUT BRASS
PLATED NICKEL

SPRING WASHER PHOSPHOR BRONZE
PLATED NICKEL




GASKET SILICONE RUBBER

CABLE ATTACHMENT:

INNER CONTACT ATTACHMENT--SOLDER/CRIMP(HEX:1.69)
OUTER CODOCTOR--CRIMP(HEX:5.41)

PACKAGING: INDIVIDUAL PLASTIC BAGS.

PART # 73174-0083

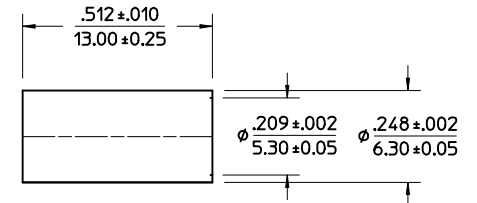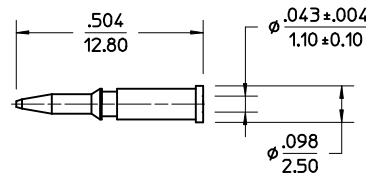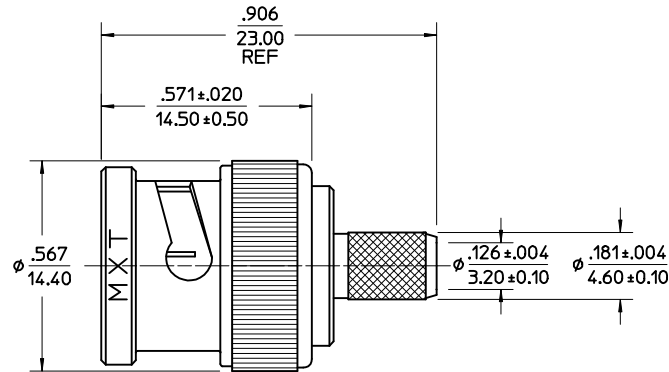

AS-89678-9040	PRODUCT SPECIFICATION
PS-73598-0024	ASSEMBLY INSTRUCTION
SPECIFICATION	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMS ARE INCHES AND ANGLES ARE DEGREES.

- ✓ 63 ALL OVER.
- NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED.
- PARTS TO BE FREE OF BURRS & SHARP EDGES .005 MAX BREAK.
- EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT.
- DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR.

QUALITY SYMBOLS



GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± _____	± _____
3 PLACES	± _____	± _____
2 PLACES	± .13	± _____
1 PLACE	± .25	± _____
ANGULAR: ±2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

SCALE

DRAWN BY & DATE
KELLY92/06/20

CHECKED BY & DATE

APPROVED BY & DATE

CAD FILENAME

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DESIGN UNITS

☒ mm ☐ INCH

THIRD ANGLE PROJECTION

TITLE:
50 OHMS BNC STRAIGHT PLUG
FOR RG58C/U, RG141A/U, RG303/U

MATERIAL NO. SEE NOTE

DRAWING NO. SD-73174-0083

SHEET NO. 1 of 1

DIMENSIONS:
☐ mm ☒ INCH ☐ mm ONLY

1 D
SHT REV
REVISE ON CAD ONLY