


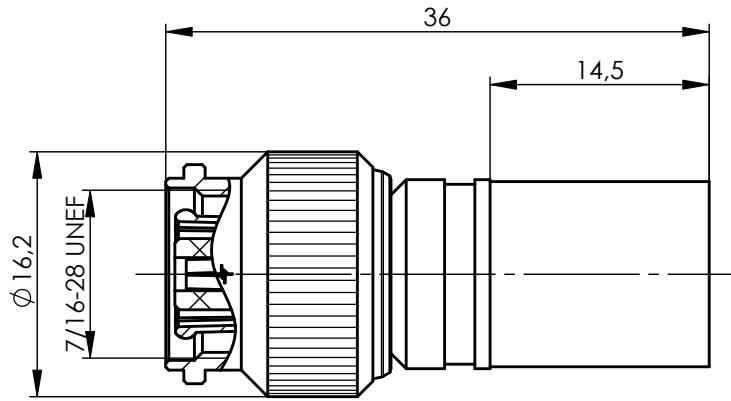

Mechanical characteristics

cables

assembly code
centre conductor
outer conductor
mating life
coupling torque
others

Components

centre contact
outer contact
other metal parts

crimp ferrule
insulator
gasket

Electrical characteristics

impedance
frequency
return loss

working voltage
voltage proof
insulation resistance
contact resistance
centre contact
outer contact

Environmental

operating temp.

Mechanische Eigenschaften

Kabel

Montageanleitung
Innenleiter
Außenleiter
Steckzyklen
Kupplungsdruckmoment
Sonstiges

Bauteile

Innenkontakt
Außenkontakt
sonstige Metallteile

Crimprohr
Isolierung
Dichtung

Elektrische Eigenschaften

Wellenwiderstand
Frequenz
Rückflussdämpfung

Betriebsspannung
Prüfspannung
Isolationswiderstand
Durchgangswiderstand
Innenkontakt
Außenkontakt

Umgebung

Betriebstemperatur

⑥ G37: 2.7/7.3 AF; 2.7/7.3 CF; 213CRT7 Low Loss;
7810A; 9913; 9913F; C2FCP; C2FP; CNT-400;
HPF 400; LMR-400; MRC 400 AFB; SPEEDFOAM 700;
TZC 500 32; WBC-400; WCX 400; EC 400

A3326
Crimp
Crimp
>500
0.46-0.69 Nm
Reverse

Materials / Material

CuNi1Pb1P (C97)
CuZn39Pb3
CuZn39Pb3, CuZn38Pb2,
CuSn8
Cu SF w
PTFE
NBR

Finish / Oberfläche


Cu1Ni2Au0.8
CuSnZn3
CuSnZn3
CuSnZn3

50 Ω
0-11 GHz
③ typ.: 1 GHz - 32 dB; 2.5 GHz - 29 dB;
3 GHz - 25dB; 6GHz - 18 dB

≤ 500 V_{eff} / 50 Hz
1.5 kV_{eff} / 50 Hz
≥ 5 GΩ

≤ 10 mΩ
≤ 2.5 mΩ

-40°C / +155°C

				2007	Datum/ date	Name/ name	Gewicht/ weight [g]	Oberfläche/ surface [mm²]	Werkstoff/ material		
				gez./ drawn	12.04.	GE					
				gepr./ appr.	20.04.07	BJ	22.08		Oberfläche/ finish		
				Norm/ stand.							
b a	20137 19162	29.07.08 05.09.07	MA MA	Maßstab/ scale 2:1	Benennung/ title R-TNC Straight Plug R-TNC-Kabelstecker				 Telegärtner		
				untol. Maße/ dim. without tolerances according to	Unterl./doc. type K	Zeichnungsnr./ drawing no. J01010R0009				 Maße/ dimensions: mm	
				Änd./ rev. Index	Änderungsmittelteilung/ revision code	Datum/ date	Name/ name	Ersatz für/ replaces			Original : DIN A4
										Blatt/ sheet 1 von/ of 1	