



Protective Caps and Shorts

> protective cap for plugs

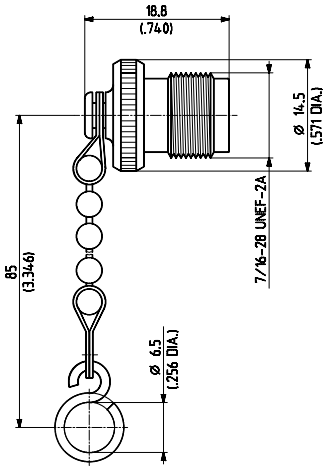

SUHNER TYPE	Order No.	Packaging	Notes
61 TNC-0-0-1 / -33 -E	22640661	single	with chain


> protective cap for jacks

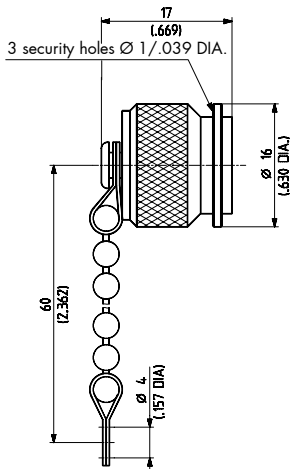

SUHNER TYPE	Order No.	Packaging	Notes
62 TNC-0-0-1 / -33 -E	22640665	single	with chain


Terminations

50 Ω, plug (male)




SUHNER TYPE	Order No.	Packaging	VSWR 300 MHz	1 GHz	Power ¹⁾	Notes
65 TNC-50-0-7 / 133 NE	22642741	single	≤ 1.05	≤ 1.1	1 Watt	

50 Ω, plug (male)



SUHNER TYPE	Order No.	Packaging	VSWR 1 GHz	1.5 GHz	2 GHz	Power ¹⁾	Notes
65 TNC-50-0-1 / 133 NE	22640680	single	≤ 1.05	≤ 1.10	≤ 1.20	1 Watt ²⁾	

50 Ω, jack (female)

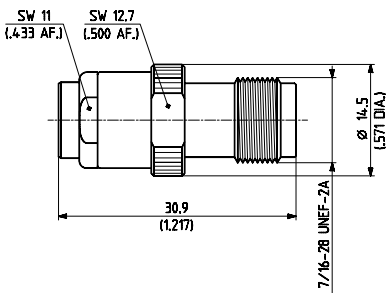

SUHNER TYPE	Order No.	Packaging	VSWR 1 GHz	1.5 GHz	2 GHz	Power ¹⁾	Notes
65 TNC-50-0-31 / 133 NE	22640683	single	≤ 1.05	≤ 1.10	≤ 1.20	1 Watt ²⁾	

1) at max. 30°C / 86°F ambient temperature, derated linearly to zero power at 130°C / 266°F

2) 2 kW peak; pulsed power with a duration of ≤ 10 ns, rise time ≥ 5 ns