



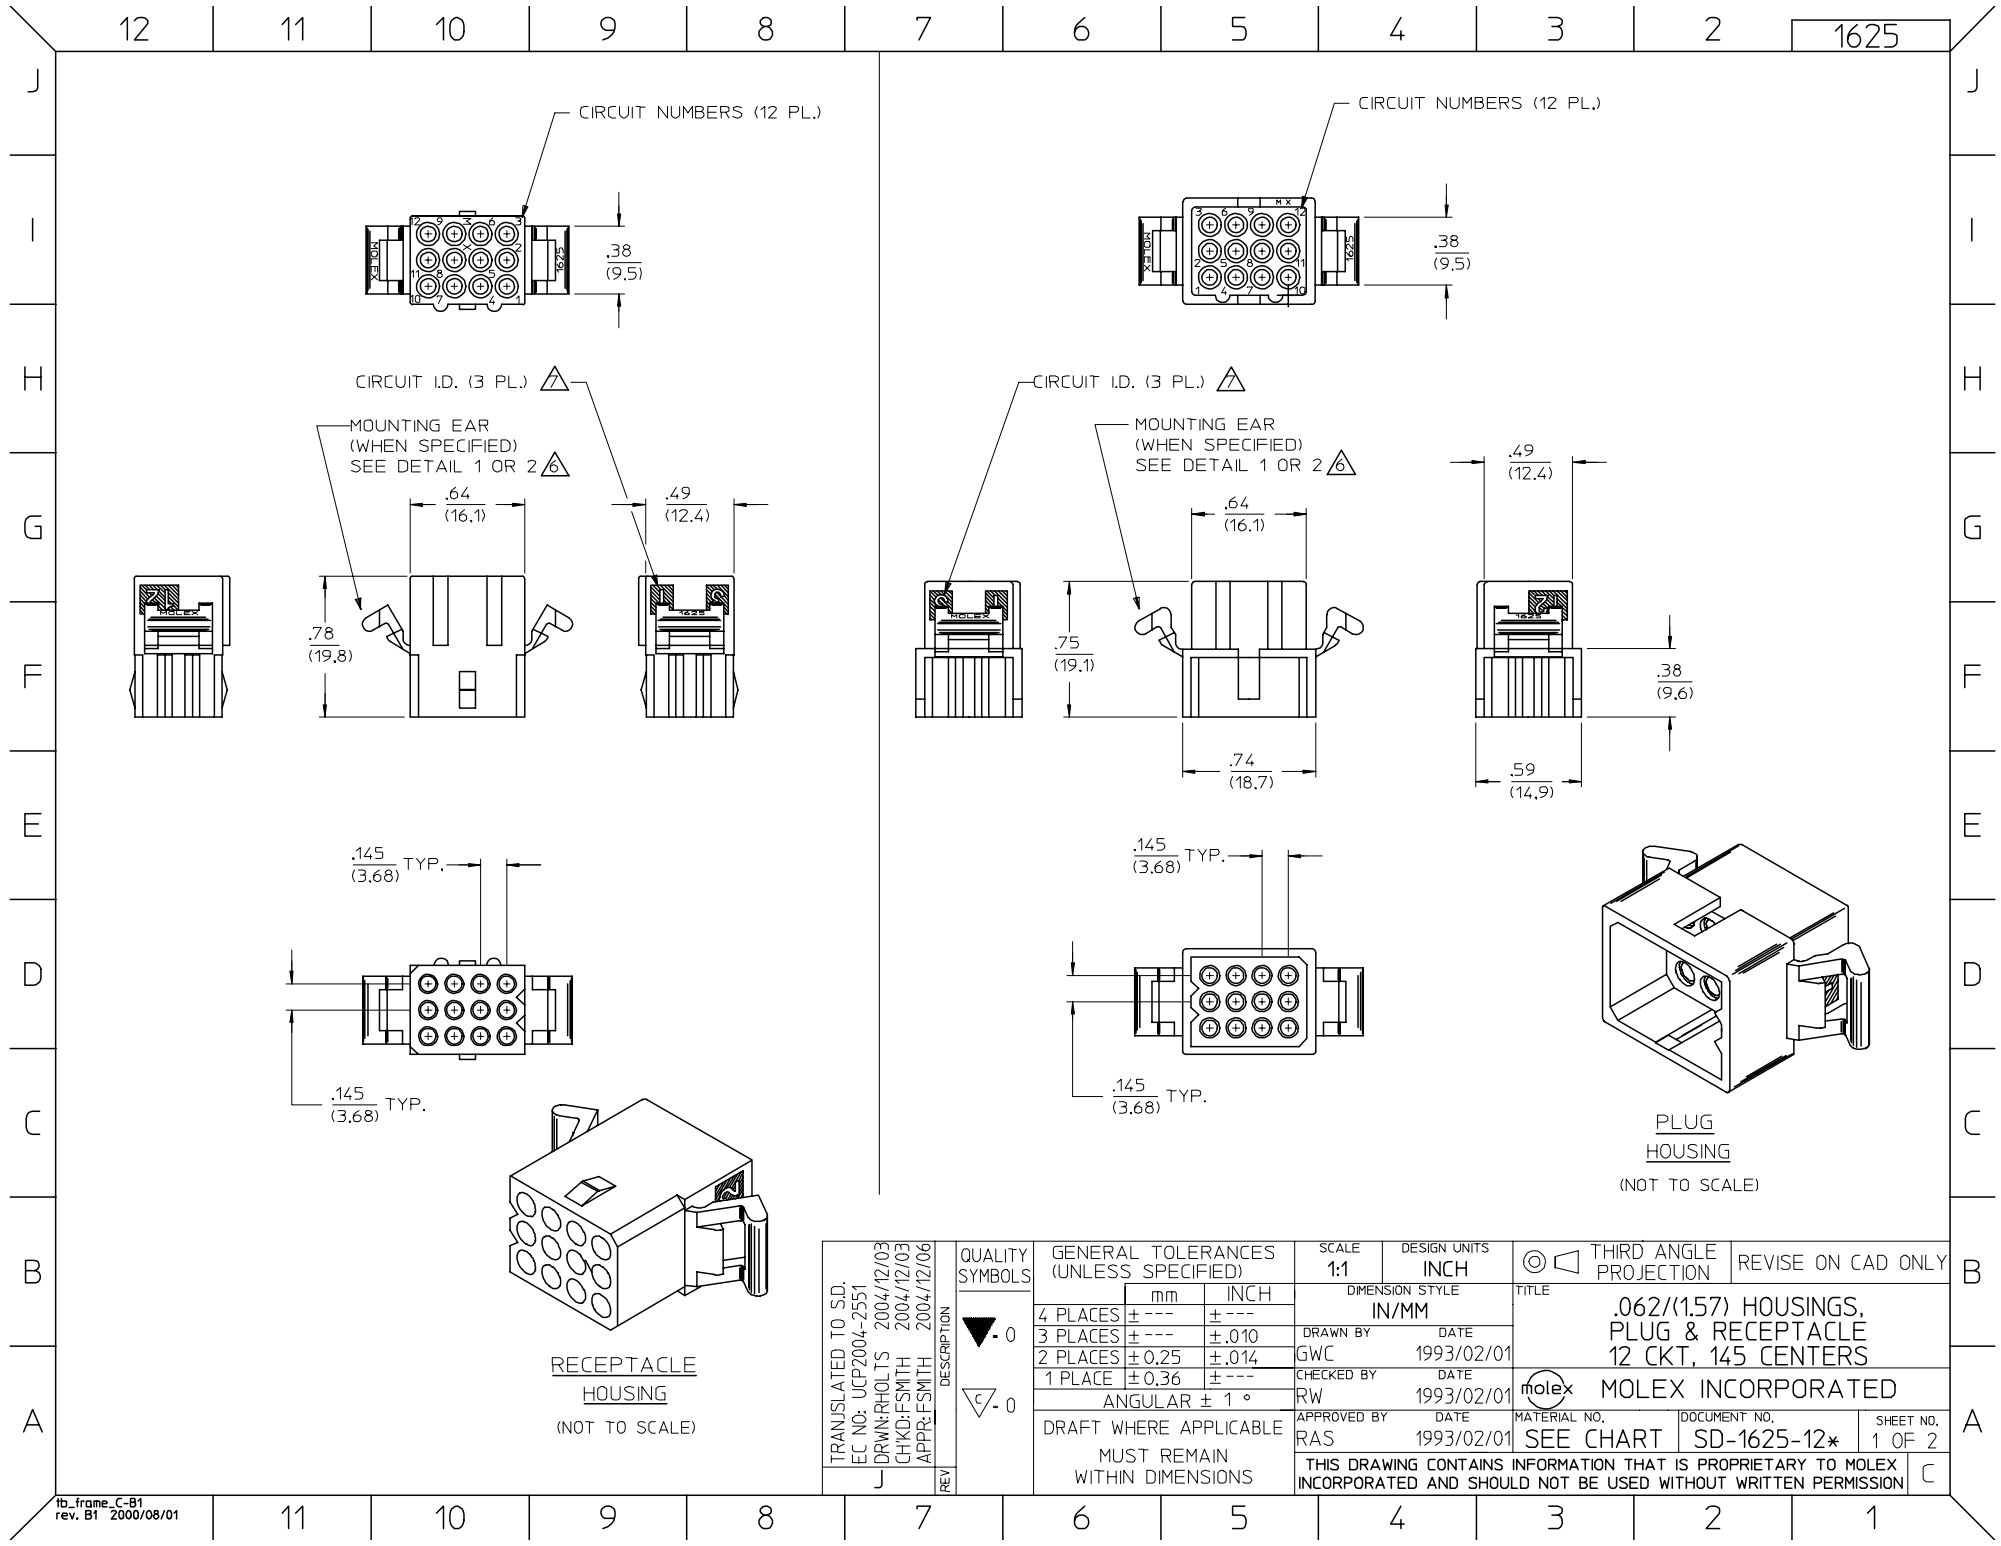

TRANSLATED TO S.D. EC NO: UCP2004-2551 DRWN:RHOLTS 2004/12/03 CHKD:FSMTH 2004/12/03 APPR:FSMTH 2004/12/06	REV DESCRIPTION C-0 C-0	QUALITY SYMBOLS -0 -0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
				mm	INCH	DIMENSION STYLE IN/MM		TITLE .062/(1,57) HOUSINGS, PLUG & RECEPTACLE 12 CKT, 145 CENTERS MOLEX MOLEX INCORPORATED				
			4 PLACES	± ---	± ---	DRAWN BY	DATE					
			3 PLACES	± ---	± .010	GWC	1993/02/01					
			2 PLACES	± 0.25	± .014	CHECKED BY	DATE					
			1 PLACE	± 0.36	± ---	RW	1993/02/01					
			ANGULAR ± 1 °			APPROVED BY	DATE	MATERIAL NO.		DOCUMENT NO.	SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			RAS	1993/02/01	SEE CHART		SD-1625-12*	1 OF 2	
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

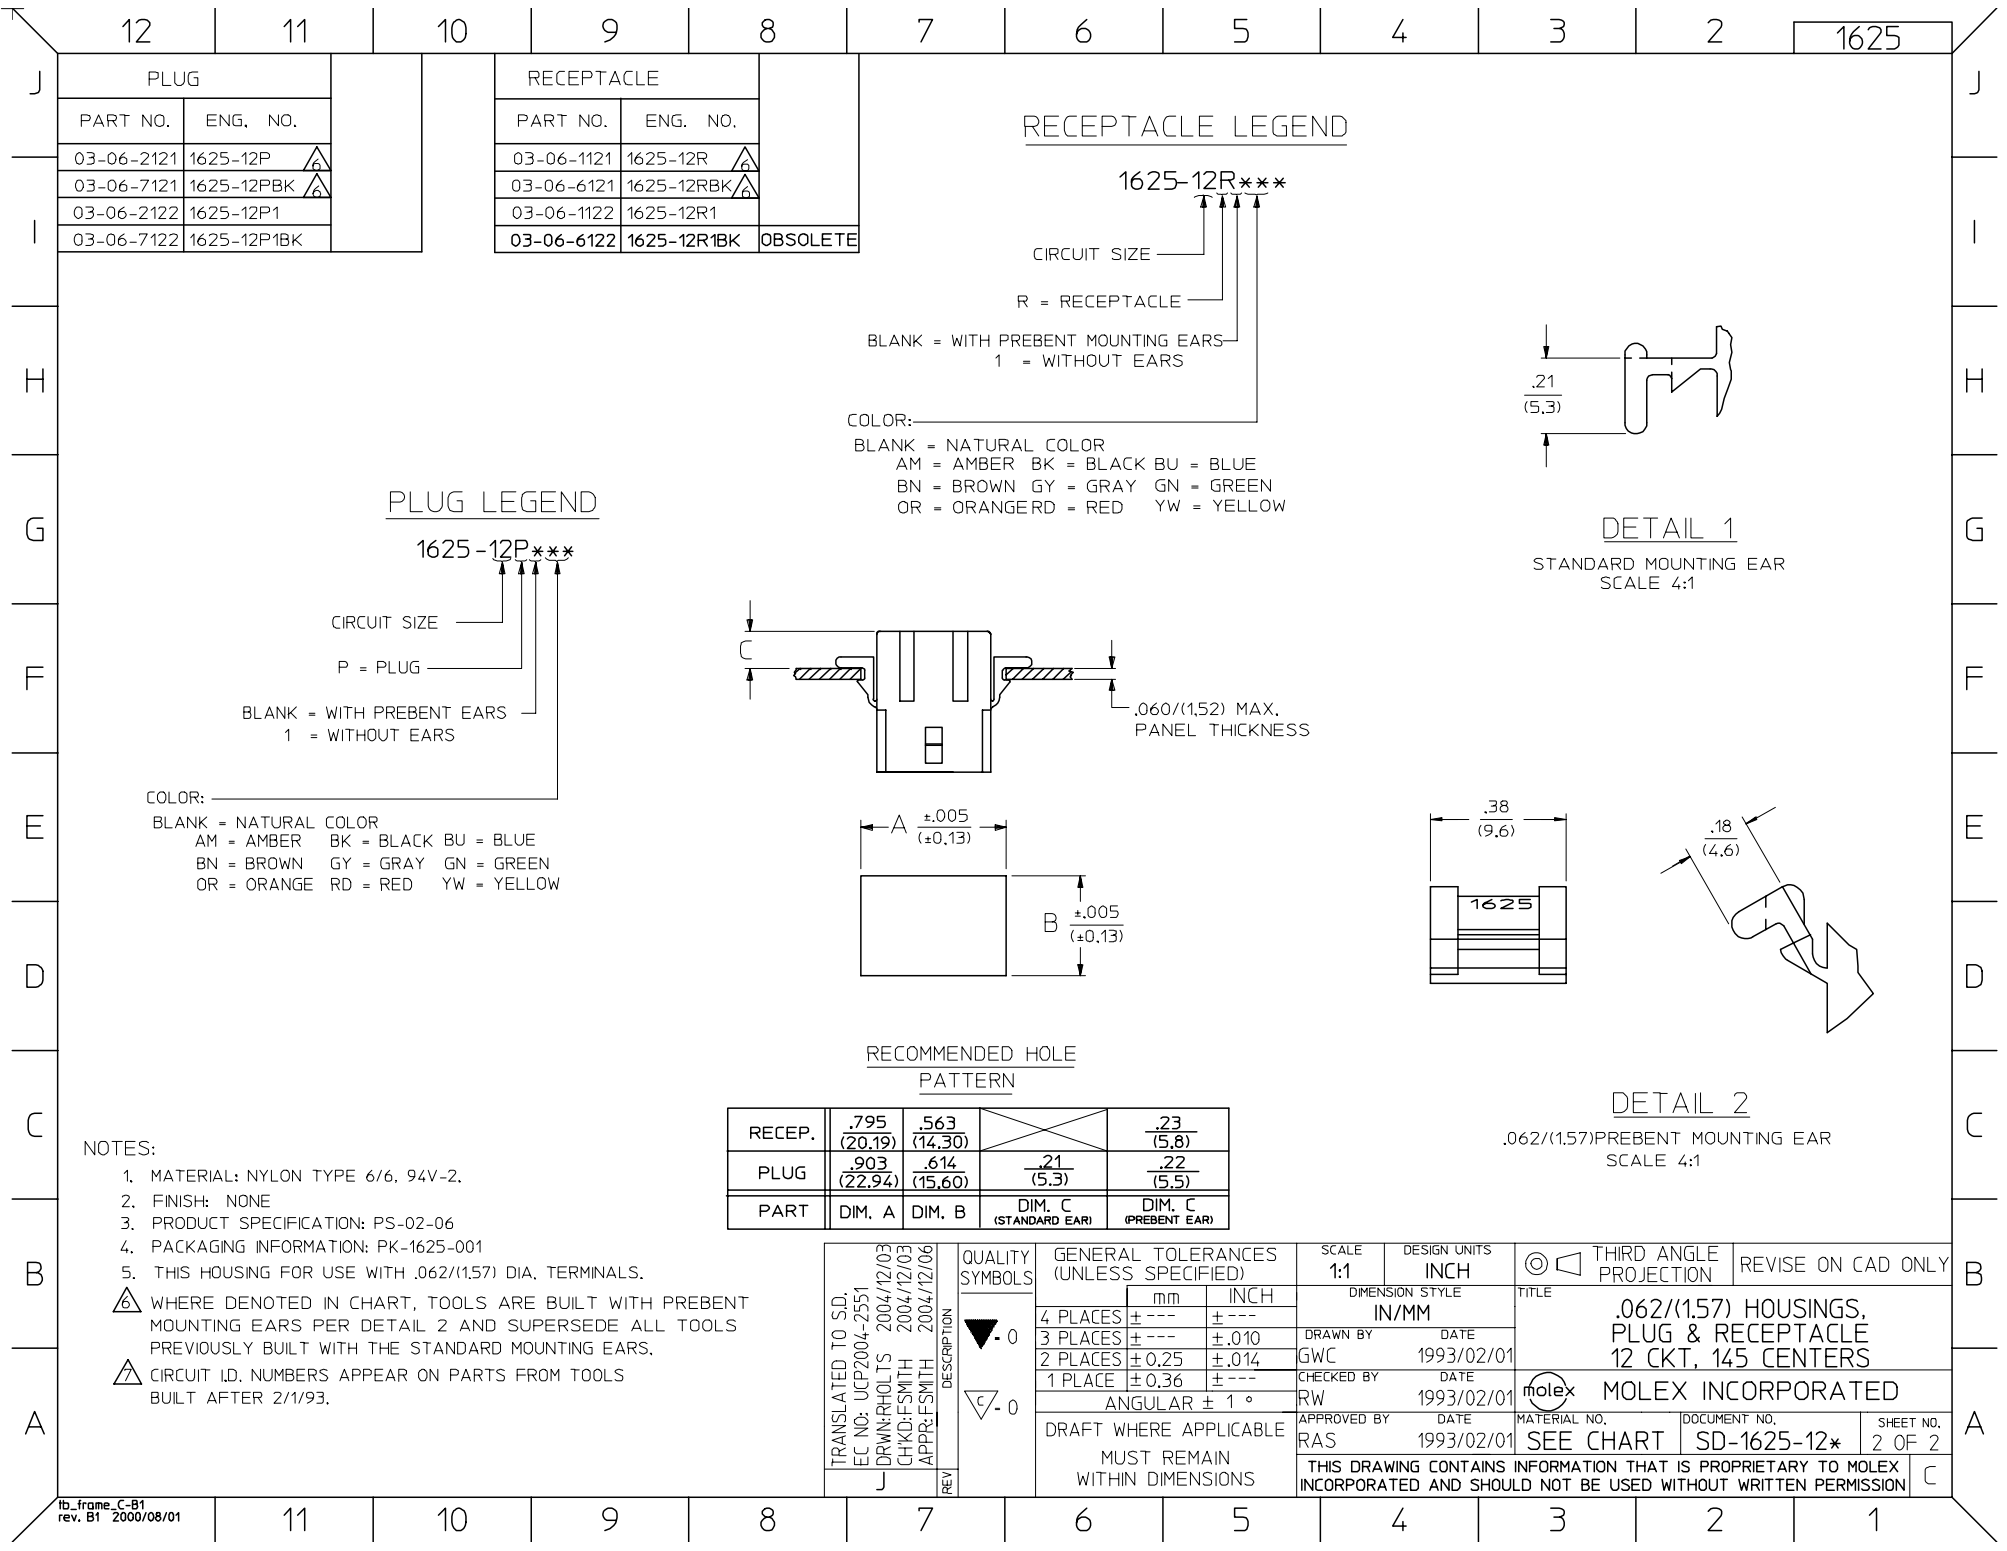


RECEPTACLE LEGEND

RECEPTACLE	
PART NO.	ENG. NO.
03-06-1121	1625-12R
03-06-6121	1625-12RBK
03-06-1122	1625-12R1
03-06-6122	1625-12R1BK
03-06-6122	OBSOLETE

1625-12R***
CIRCUIT SIZE
R = RECEPTACLE

BLANK = WITH PREBENT MOUNTING EARS
1 = WITHOUT EARS

COLOR:
BLANK = NATURAL COLOR
AM = AMBER BK = BLACK BU = BLUE
BN = BROWN GY = GRAY GN = GREEN
OR = ORANGERD = RED YW = YELLOW



DETAIL 1

STANDARD MOUNTING EAR
SCALE 4:1

PLUG LEGEND


PLUG	
PART NO.	ENG. NO.
03-06-2121	1625-12P
03-06-7121	1625-12PBK
03-06-2122	1625-12P1
03-06-7122	1625-12P1BK

1625-12P***

CIRCUIT SIZE
P = PLUG


BLANK = WITH PREBENT EARS
1 = WITHOUT EARS

COLOR:
BLANK = NATURAL COLOR
AM = AMBER BK = BLACK BU = BLUE
BN = BROWN GY = GRAY GN = GREEN
OR = ORANGE RD = RED YW = YELLOW

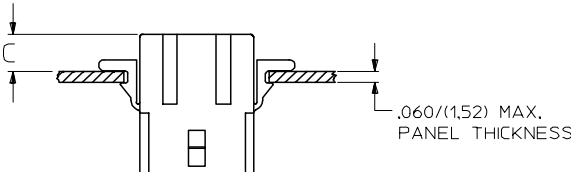

RECOMMENDED HOLE PATTERN

RECEP.	.795 (20.19)	.563 (14.30)	.23 (5.8)
PLUG	.903 (22.94)	.614 (15.60)	.22 (5.5)
PART	DIM. A	DIM. B	DIM. C (PREBENT EAR)



DETAIL 2

.062/(1.57) PREBENT MOUNTING EAR
SCALE 4:1

NOTES:

1. MATERIAL: NYLON TYPE 6/6, 94V-2.
 2. FINISH: NONE
 3. PRODUCT SPECIFICATION: PS-02-06
 4. PACKAGING INFORMATION: PK-1625-001
 5. THIS HOUSING FOR USE WITH .062/(1.57) DIA. TERMINALS.
- WHERE DENOTED IN CHART, TOOLS ARE BUILT WITH PREBENT MOUNTING EARS PER DETAIL 2 AND SUPERSEDE ALL TOOLS PREVIOUSLY BUILT WITH THE STANDARD MOUNTING EARS.
- CIRCUIT ID. NUMBERS APPEAR ON PARTS FROM TOOLS BUILT AFTER 2/1/93.

QUALITY SYMBOLS	DESCRIPTION
0	0
0	0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± .010
3 PLACES	± .010
2 PLACES	± .014
1 PLACE	± .036
ANGULAR ± 1°	
DRAFT WHERE APPLICABLE	
MUST REMAIN WITHIN DIMENSIONS	

SCALE	DESIGN UNITS
1:1	INCH
DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
GWC	1993/02/01
CHECKED BY	DATE
RW	1993/02/01
APPROVED BY	DATE
RAS	1993/02/01

THIRD ANGLE PROJECTION	
REVISE ON CAD ONLY	
TITLE	
.062/(1.57) HOUSINGS, PLUG & RECEPTACLE 12 CKT, 145 CENTERS	
MOLEX INCORPORATED	
MATERIAL NO.	DOCUMENT NO.
SEE CHART	SD-1625-12*
SHEET NO.	2 OF 2