





Contact Arrangement	Wt (oz.)	Shell size	A	B	C	D flat	E dia.	F sq.
2-19 amp. 250 V	1.8	1	.88	1.84	1.080	.811	.848	1.12
3-5 amp. 250 V	1.7				to	to	to	
4-5 amp. 250 V	1.7				1.085	.816	.853	
6-5 amp. 250 V	1.8							
4-19 amp. 250 V	2.5	2	.88	1.84	1.370	1.033	1.067	1.34
6-5 amp. 500 V	2.4				to	to	to	
6-5 amp. 2 kV	2.4				1.375	1.038	1.072	
12-5 amp. 250 V	2.5							
6-19 amp. 2.5 kV	4.4	3	.97	2.06	1.810	1.410	1.442	1.72
18-5 amp. spec.	4.3				to	to	to	
25-5 amp. 250 V	4.5				1.815	1.415	1.447	

PANEL PIERCING DETAILS IN DIRECTION OF ARROW "Z"

Bulkhead plug/sockets and socket/plugs

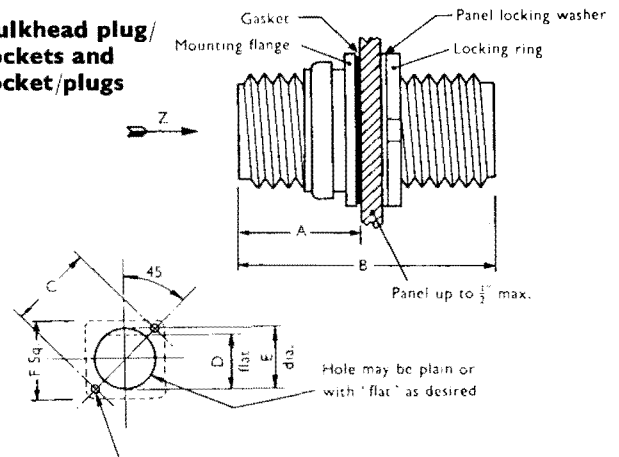


MAY BE MOUNTED FROM THE REAR OF THE PANEL ONLY

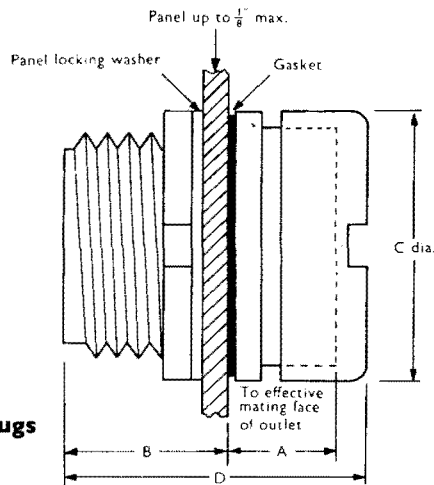

Fixed coupler plugs and sockets

2 holes .125" dia. drilled right through on panels up to 1/16" thick. Need not exceed 1/16" depth on other thicknesses

Free coupler plugs and sockets

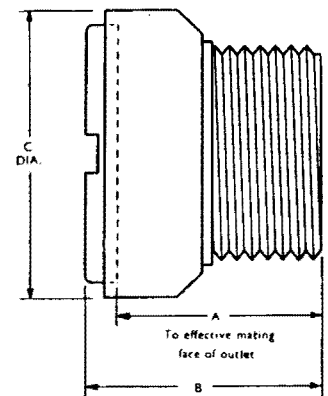

Contact Arrangement	Weight (oz.)		Shell Size	A	B	C dia.	D
	Plug	Skt.					
2-19 amp. 250 V	1.0	1.0	1	.31	.60	1.125	1.054
3-5 amp. 250 V	1.0	1.0					
4-5 amp. 250 V	1.0	1.1					
6-5 amp. 250 V	1.1	1.1					
2-35 amp. 250 V	1.4	1.4	2	.30	.60	1.343	1.034
3-19 amp. 2 kV	1.3	1.3					
4-19 amp. 250 V	1.4	1.4					
6-5 amp. 500 V	1.7	1.8					
6-5 amp. 2 kV	1.6	1.7					
12-5 amp. 250 V	1.9	1.9					
3-60 amp. 250 V	2.8	2.5	3	.36	.67	1.718	1.177
1-19 amp.							
2-60 amp. 250 V	2.7	2.7					
3-19 amp.							
6-19 amp. 2.5 kV	2.4	2.4					
9-19 amp. 250 V	2.6	2.7					
18-5 amp. spec.	2.3	2.2					
25-5 amp. 250 V	2.5	2.7					

Contact Arrangement	Weight (oz.)		Shell Size	A	B	C dia.
	Plug	Skt.				
2-19 amp. 250 V	1.0	1.0	1	.91	1.054	1.2
3-5 amp. 250 V	1.0	1.0				
4-5 amp. 250 V	1.0	1.1				
6-5 amp. 250 V	1.1	1.1				
2-35 amp. 250 V	1.4	1.3	2	.90	1.034	1.425
3-19 amp. 2 kV	1.3	1.3				
4-19 amp. 250 V	1.4	1.4				
6-5 amp. 500 V	1.7	1.8				
6-5 amp. 2 kV	1.6	1.7				
12-5 amp. 250 V	1.9	1.9				
3-60 amp. 250 V	2.6	2.3	3	1.03	1.177	.796
1-19 amp.						
2-60 amp. 250 V	2.5	2.5				
3-19 amp.						
6-19 amp. 2.5 kV	2.2	2.2				
9-19 amp. 250 V	2.4	2.5				
18-5 amp. spec.	2.3	2.2				
25-5 amp. 250 V	2.5	2.7				