

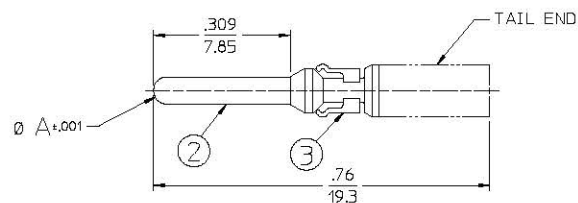


REV	DESCRIPTION	BY DATE	APPD
H	REVISED PER ECR# 6003	CMB 09/06/99	W.P.N.

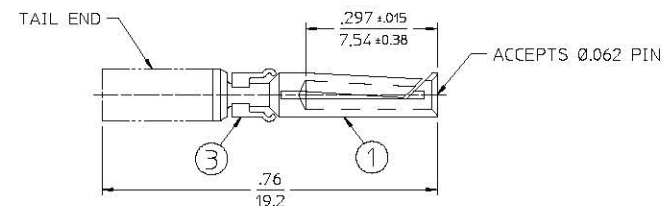


PIN

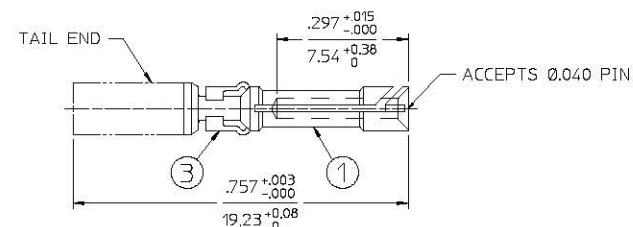


2 PIECE SOCKETS

TAIL OPTIONS



CRIMP



SOLDER

PIN Ø A =.0625/1.587				PIN Ø A =.040/1.02				WIRE SIZE	B	C	D
CRIMP CAT. Nº		SOLDER CAT. Nº		CRIMP CAT. Nº		SOLDER CAT. Nº					
CONTACT	REEL 2	CONTACT	REEL	CONTACT	REEL 2	CONTACT	REEL				
100-1026P-Δ	100-0963P-Δ	—	—	—	—	—	—	26-28-30	.024/0.61	.050/1.27	.077/1.95
100-1024P-Δ	100-0917P-Δ	100-2524P-Δ		100-2024P-Δ	100-0951P-Δ	100-2624P-Δ		24-26-28	.027/0.68	.055/1.40	.077/1.95
100-1022P-Δ	100-0907P-Δ	100-2522P-Δ		100-2022P-Δ	100-0947P-Δ	100-2622P-Δ		22-24-26	.033/0.84	.055/1.40	.077/1.95
100-1020P-Δ	100-0915P-Δ	100-2520P-Δ		100-2020P-Δ	100-0945P-Δ	100-2620P-Δ		20-22-24	.046/1.17	.069/1.75	.077/1.95
100-1018P-Δ	100-0913P-Δ	100-2518P-Δ		100-2018P-Δ	100-0943P-Δ	100-2618P-Δ		18-20-22	.052/1.32	.078/1.98	.096/2.44
100-1016P-Δ	100-0911P-Δ	100-2516P-Δ		100-2016P-Δ	100-0949P-Δ	100-2616P-Δ		16-18-20	.068/1.73	.094/2.39	.110/2.79
100-1014P-Δ	100-0909P-Δ	100-2514P-Δ		—	—	—		14-16-18	.081/2.06	.105/2.67	.110/2.79
100-1012P-Δ	100-0903P-Δ	—		—	—	—		12-14	.098/2.49	.120/3.05	.120/3.05
100-1026S-Δ	100-0965S-Δ	—		—	—	—		26-28-30	.024/0.61	.050/1.27	.077/1.95
100-1024S-Δ	100-0927S-Δ	100-2524S-Δ		100-2024S-Δ	100-0941S-Δ	100-2624S-Δ		24-26-28	.027/0.68	.055/1.40	.077/1.95
100-1022S-Δ	100-0908S-Δ	100-2522S-Δ	100-2022S-Δ	100-0937S-Δ	100-2622S-Δ	22-24-26	.033/0.84	.055/1.40	.077/1.95		
100-1020S-Δ	100-0925S-Δ	100-2520S-Δ	100-2020S-Δ	100-0935S-Δ	100-2620S-Δ	20-22-24	.046/1.17	.069/1.75	.077/1.95		
100-1018S-Δ	100-0923S-Δ	100-2518S-Δ	100-2018S-Δ	100-0933S-Δ	100-2618S-Δ	18-20-22	.052/1.32	.078/1.98	.096/2.44		
100-1016S-Δ	100-0921S-Δ	100-2516S-Δ	100-2016S-Δ	100-0939S-Δ	100-2616S-Δ	16-18-20	.068/1.73	.094/2.39	.110/2.79		
100-1014S-Δ	100-0919S-Δ	100-2514S-Δ	—	—	—	14-16-18	.081/2.06	.105/2.67	.110/2.79		

PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR MILLIMETERS		Litten Winchester Electronics 400 PARK ROAD WATERTOWN, CONNECTICUT 06105	
TOLERANCES DECIMALS .XX ± .02 ANGLES ± .010		SCALE: 5:1	
CUSTOMER DRAWING		TITLE MRAC REMOVABLE PIN & SOCKET CONTACTS	
DRAWN Denna 05/18/94	DATE DESIGNED J.M.G. 08/18/94	APPROVED V.B.H. 08/18/94	DATE APPROVED D.R. 08/19/94
C		22891	
REV. 2 OF 5		H	