




Stepping Motor

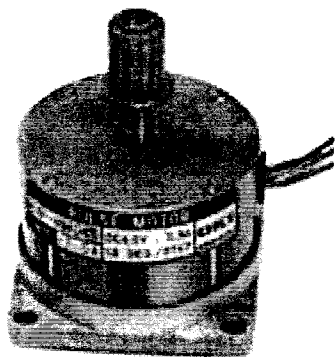

Type: **KHP-11M04B**

<http://www.casa.co.nz>

Edition: 19/09/2011

General Data

OEM #: KHP-11M04B

Brand: OKI (Japan)

Frame: NEMA 23 (base-mounted)

Steps: 200 / rev (1.8 degrees per step
or finer with micro-stepping)

Current: 0.9 Amp

Volts: 4 Vdc

Torque: ____ Nm @ ____ A (____ oz.in.)

Resistance: 4.6 Ohms / phase
(nominal)

Inductance: 10 mH / phase (nominal)

Connector: 7 way x 0.1" (see diag.)

Wires: 6 wire (250 mm nominal)

Shaft: 9.52 mm dia x 20 mm long

Shaft-Detail: Plain


Size: 56 x 56 x 40mm (nominal)

Weight: 0.36 kg

Supply-Max: 24~80 Vdc (recommended
max = V x 25)


Condition: NEW / Used (refurbished)

Comments: mounts on flanged base.
Optional timing pulley may be available.

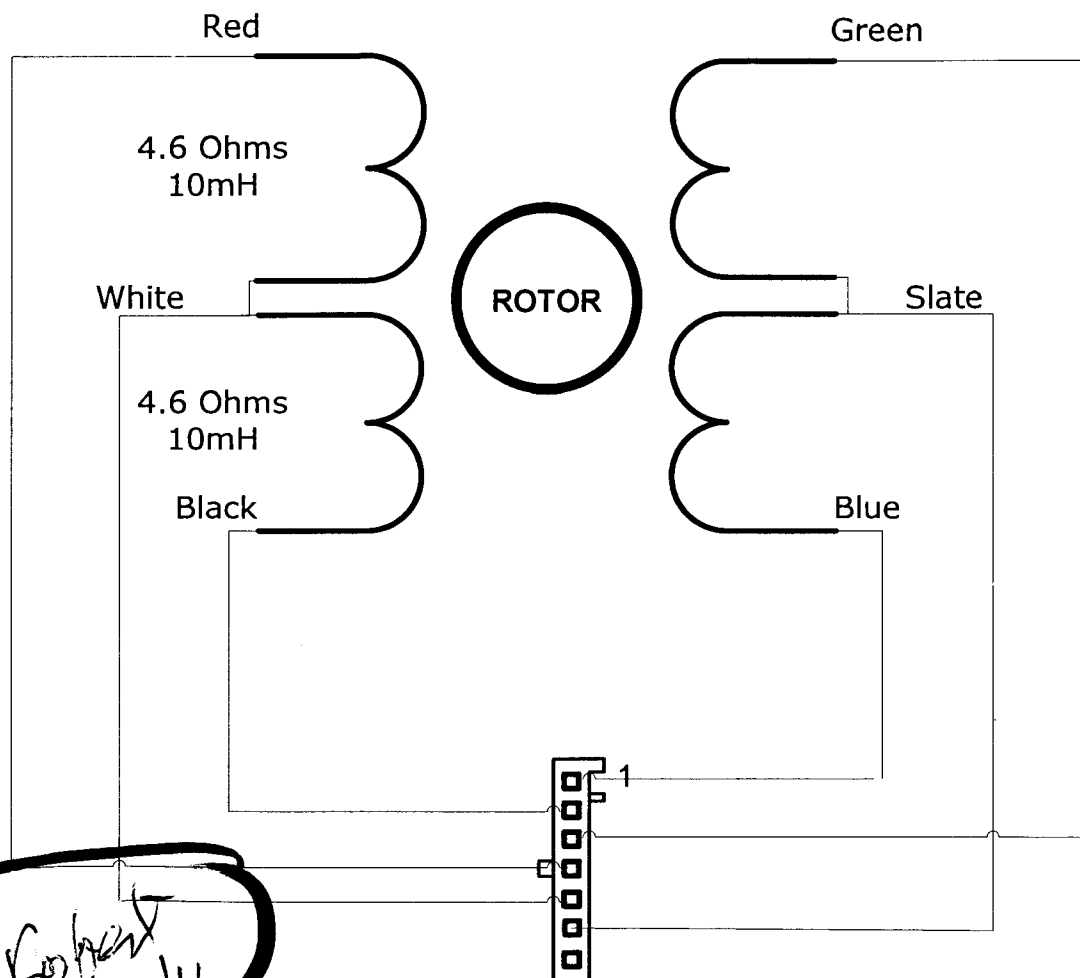

NOTICE - the information on this page is not guaranteed for accuracy - CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.

*1 to Robert
24/5/16*



Stepping Motor



Type: **M061-FC-306B**

<http://www.casa.co.nz>

Edition: 19/08/2011

General Data

Type #: M061-FC-306B

Brand: Slo-Syn (Superior Electric USA)

Spec: 5562045

Frame: NEMA 23

Steps: 200/rev (1.8 Degrees per full-step or finer with micro-stepping)

Current: 0.18 Amp

Volts: 24 Vdc

Torque: ____ Nm @ ____ A (18 oz.in.)

Resistance: 133/266 Ohms / phase (nominal)

Inductance: 295/590 mH / phase (nominal)

Connector: 7 way x 0.1" (see diag.) (if fitted)

Wires: 5 wire (up to 150 mm nominal)

Shaft: 6.35mm dia x 19mm long


Shaft-Detail: Plain

Size: 56 x 56 x 53mm (nominal)

Supply-Max: 24~80Vdc (recommended max = V x 25)

Weight: 0.52kg

Condition: Used (refurbished)

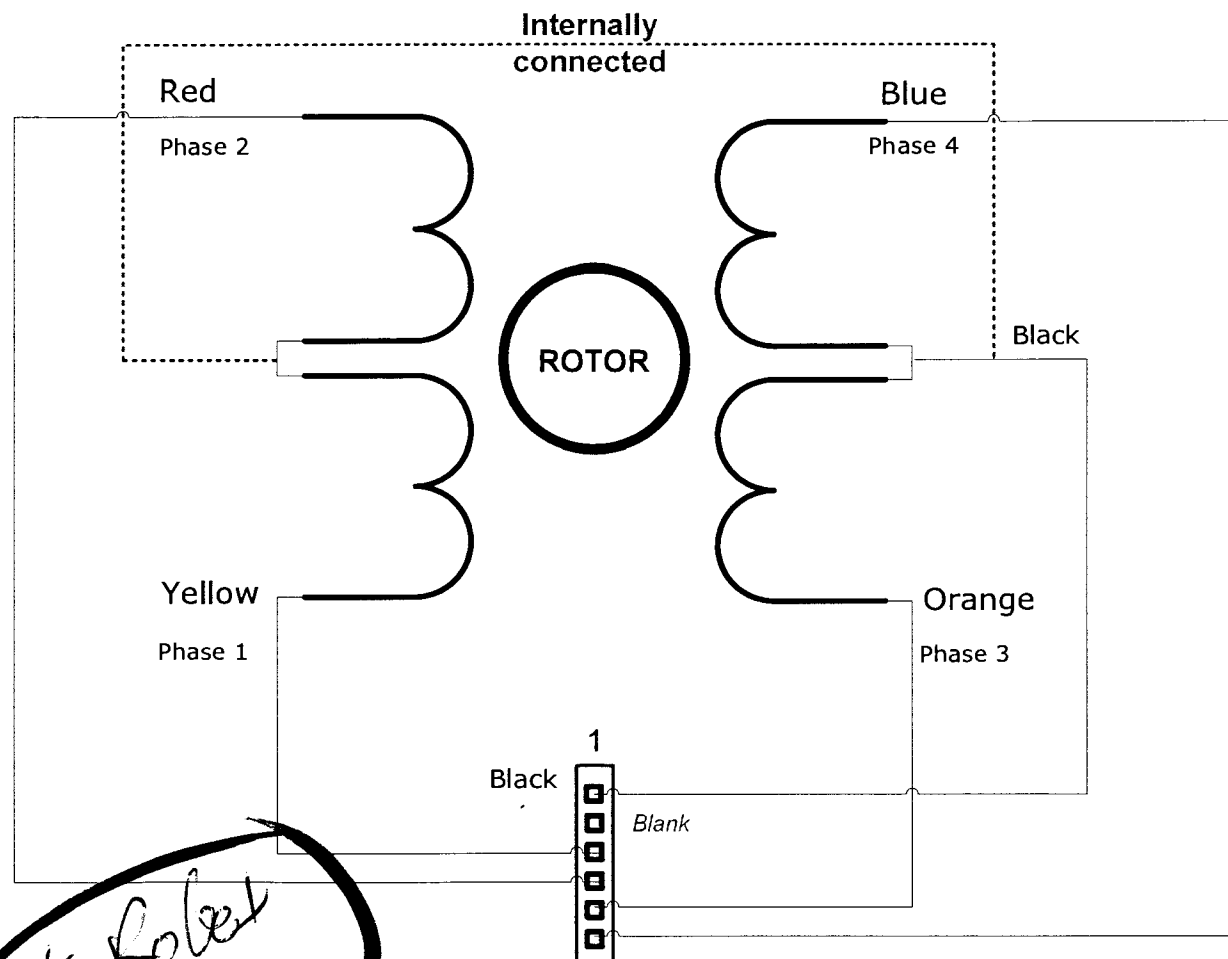

*1 to Rotor
24/5/16 A*

NOTE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.